


DECISION COMPUTER INTERNATIONAL CO., LTD. PCCOM 8-BIT ISA 4-PORT RS-422 (NEW)

Card Type Serial
Chipset GoldStar
I/O Options Serial ports (4)
Data Bus 8-bit ISA

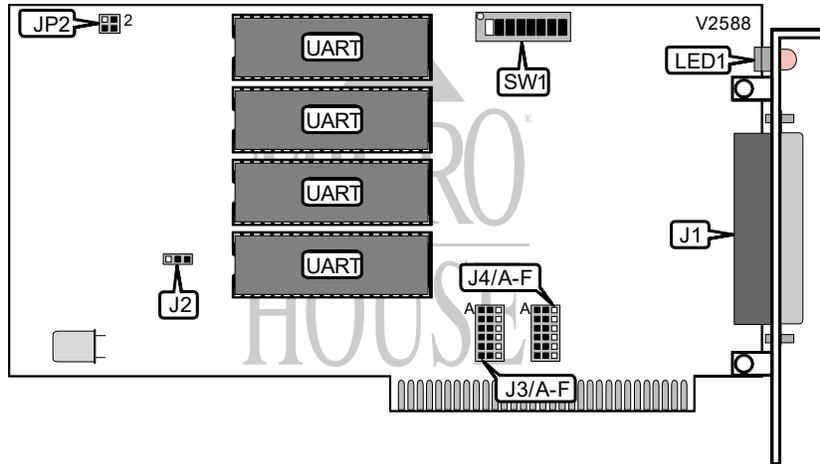

CONNECTIONS	
Function	Label
Serial ports via DB-37 connector	J1
Note: Standard DB-25 serial ports are provided on an included adapter cable.	

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
í Factory configured - do not alter	J2	Pins 1 & 2 closed	
í Bus speed set to 16MHz or lower	JP2	Pins 1 & 3 closed	
Bus speed set higher than 16MHz		Pins 2 & 4 closed	
í Factory configured - do not alter	SW1/6	Unidentified	
í Factory configured - do not alter	SW1/7	Off	
í Factory configured - do not alter	SW1/8	Off	

SERIAL PORT ADDRESSES					
Port 1	Port 2	Port 3	Port 4	SW1/1	SW1/2
3F8h (COM1:)	2F8h (COM2:)	2B0h	2B8h	On	On
3F8h (COM1:)	2F8h (COM2:)	1B0h	1B8h	On	Off
í 2A0h	2A8h	2B0h	2B8h	Off	On
1A0h	1A8h	1B0h	1B8h	Off	Off

INTERRUPT MODE			
Setting	SW1/3	SW1/4	SW1/5
í Global	Off	Off	On
Separate	On	On	Off

Continued on next page. . .

DECISION COMPUTER INTERNATIONAL CO., LTD.
PCCOM 8-BIT ISA 4-PORT RS-422 (NEW)

. . . continued from previous page

PORT 1 INTERRUPT						
Setting	JP3/A	JP3/B	JP3/C	JP3/D	JP3/E	JP3/F
IRQ2	Pins 2 & 3	Open	Open	Open	Open	Open
IRQ3	Open	Pins 2 & 3	Open	Open	Open	Open
IRQ4	Open	Open	Pins 2 & 3	Open	Open	Open
IRQ5	Open	Open	Open	Pins 2 & 3	Open	Open
IRQ6	Open	Open	Open	Open	Pins 2 & 3	Open
IRQ7	Open	Open	Open	Open	Open	Pins 2 & 3

Note: Pins designated are in the closed position.

PORT 2 INTERRUPT						
Setting	JP3/A	JP3/B	JP3/C	JP3/D	JP3/E	JP3/F
IRQ2	Pins 1 & 2	Open	Open	Open	Open	Open
IRQ3	Open	Pins 1 & 2	Open	Open	Open	Open
IRQ4	Open	Open	Pins 1 & 2	Open	Open	Open
IRQ5	Open	Open	Open	Pins 1 & 2	Open	Open
IRQ6	Open	Open	Open	Open	Pins 1 & 2	Open
IRQ7	Open	Open	Open	Open	Open	Pins 1 & 2

Note: Pins designated are in the closed position.

PORT 3 INTERRUPT						
Setting	JP4/A	JP4/B	JP4/C	JP4/D	JP4/E	JP4/F
IRQ2	Pins 2 & 3	Open	Open	Open	Open	Open
IRQ3	Open	Pins 2 & 3	Open	Open	Open	Open
IRQ4	Open	Open	Pins 2 & 3	Open	Open	Open
IRQ5	Open	Open	Open	Pins 2 & 3	Open	Open
IRQ6	Open	Open	Open	Open	Pins 2 & 3	Open
IRQ7	Open	Open	Open	Open	Open	Pins 2 & 3

Note: Pins designated are in the closed position.

PORT 4/GLOBAL INTERRUPT						
Setting	JP4/A	JP4/B	JP4/C	JP4/D	JP4/E	JP4/F
IRQ2	Pins 1 & 2	Open	Open	Open	Open	Open
IRQ3	Open	Pins 1 & 2	Open	Open	Open	Open
IRQ4	Open	Open	Pins 1 & 2	Open	Open	Open
IRQ5	Open	Open	Open	Pins 1 & 2	Open	Open
IRQ6	Open	Open	Open	Open	Pins 1 & 2	Open
IRQ7	Open	Open	Open	Open	Open	Pins 1 & 2

Note: Pins designated are in the closed position.

DIAGNOSTIC LED(S)						
The function of the LED is unidentified.						