


DIALOGIC CORPORATION

D/41E (REV. 2)

Card Type Telephony
I/O Options Wavetable header
Data Bus 16-bit ISA
Line Type Loop-start

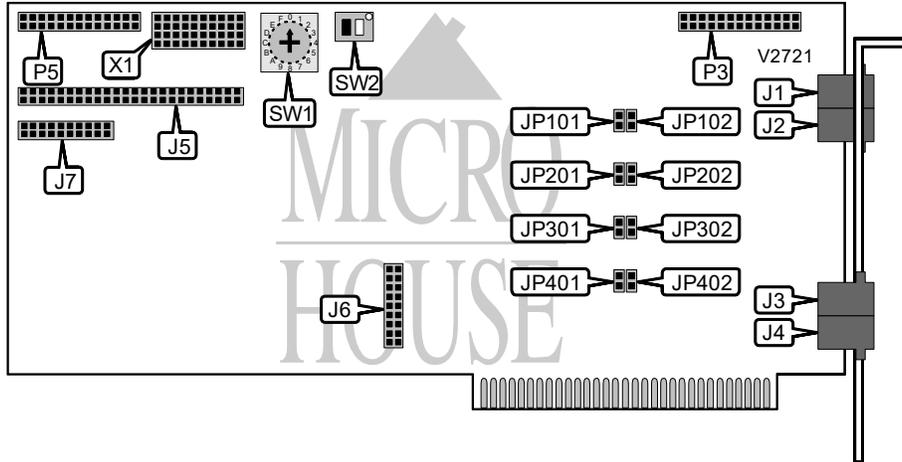

CONNECTIONS			
Function	Label	Function	Label
Line 1 out	J1	Unidentified	J6
Line 2 out	J2	Unidentified	J7
Line 3 out	J3	Unidentified	P3
Line 4 out	J4	Unidentified	P5
Unidentified	J5		

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Factory configured - do not alter	J101	Unidentified
í Factory configured - do not alter	J102	Unidentified
í Factory configured - do not alter	J201	Unidentified
í Factory configured - do not alter	J202	Unidentified
í Factory configured - do not alter	J301	Unidentified
í Factory configured - do not alter	J302	Unidentified
í Factory configured - do not alter	J401	Unidentified
í Factory configured - do not alter	J402	Unidentified
í Disabled board will not answer incoming calls	SW2/1	Off
í Disabled board will send busy signal to incoming calls	SW2/1	On

Continued on next page. . .

DIALOGIC CORPORATION
D/41E (REV. 2)

. . . continued from previous page

BOARD NUMBER		
Setting	SW1	SW2/2
0	0	Off
1	1	Off
2	2	Off
3	3	Off
4	4	Off
5	5	Off
6	6	Off
7	7	Off
8	8	Off
9	9	Off
10	A	Off
11	B	Off
12	C	Off
13	D	Off
14	E	Off
15	F	Off
16	0	Off
17	1	Off
18	2	Off
19	3	Off
20	4	Off
21	5	Off
22	6	Off
23	7	Off
24	8	Off
25	9	Off
26	A	Off
27	B	Off
28	C	Off
29	D	Off
30	E	Off
31	F	Off