


NEC TECHNOLOGIES, INC.

APC-H250E

Card Type Memory
Chipset Unidentified
Maximum Onboard Memory 8MB DRAM
Data Bus 16-bit ISA

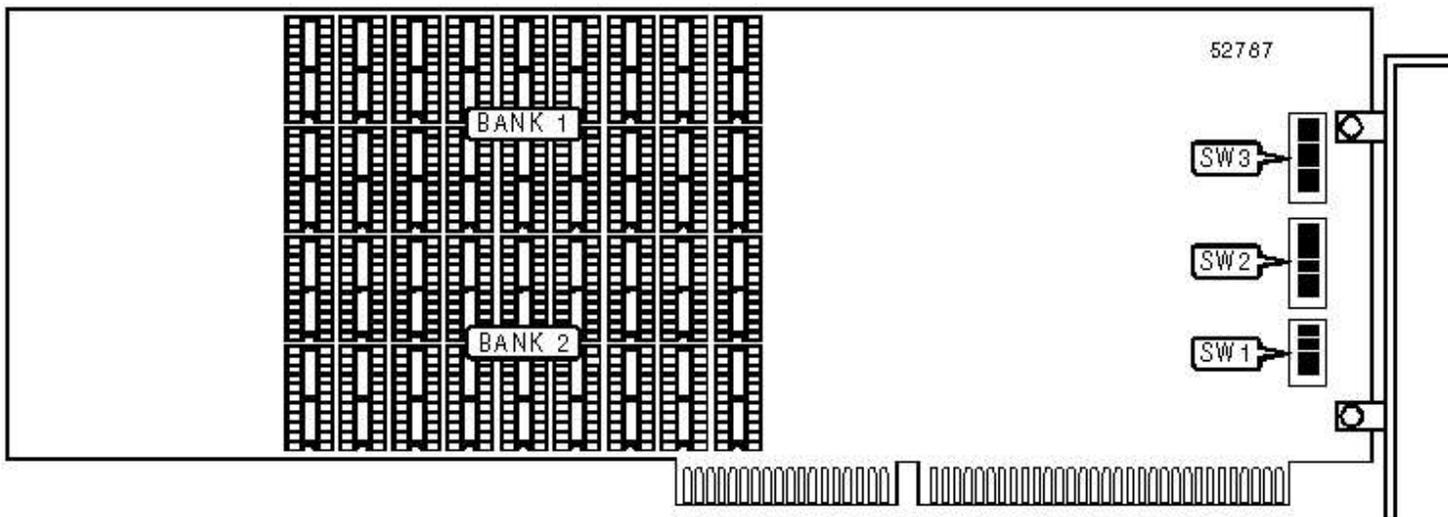

DRAM CONFIGURATION		
Size	Bank 1	Bank 2
4MB	None	None
6MB	(18) 128KB	None
8MB	(18) 128KB	(18) 128KB

Note: The location and configuration of Bank 0 is unidentified.

DRAM SWITCH CONFIGURATION					
Card	Mainboard	SW1/1	SW1/2	SW1/3	SW1/4
4MB	0MB	On	On	On	On
4MB	1MB	On	On	On	On
4MB	2MB	On	On	On	On
4MB	3MB	On	On	On	On

4MB	4MB	On	On	On	On
4MB	5MB	On	On	On	On
4MB	6MB	On	On	On	On
4MB	7MB	On	On	On	On
4MB	8MB	On	On	On	On
4MB	9MB	On	On	On	On
4MB	10MB	On	On	On	On
4MB	11MB	On	On	On	On
4MB	12MB	On	On	On	On
4MB	13MB	On	On	On	On
4MB	14MB	On	On	On	On
6MB	0MB	On	On	On	On
6MB	1MB	On	On	On	On
6MB	2MB	On	On	On	On
6MB	3MB	On	On	On	On
6MB	4MB	On	On	On	On
6MB	5MB	On	On	On	On
6MB	6MB	On	On	On	On

DRAM SWITCH CONFIGURATION					
Card	Mainboard	SW1/1	SW1/2	SW1/3	SW1/4
6MB	7MB	On	On	On	On
6MB	8MB	On	On	On	On
6MB	9MB	On	On	On	On
6MB	10MB	On	On	On	On

8MB	0MB	On	On	Off	Off
8MB	1MB	On	Off	Off	On
8MB	2MB	On	On	Off	On
8MB	3MB	On	Off	On	Off
8MB	4MB	On	On	On	Off
8MB	5MB	On	Off	On	On
8MB	6MB	On	On	On	On
8MB	7MB	On	On	Off	Off
8MB	8MB	On	On	On	On

DRAM SWITCH CONFIGURATION (CON'T)							
Card	Mainboard	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
4MB	0MB	On	On	On	Off	On	Off
4MB	1MB	On	On	On	Off	Off	On
4MB	2MB	On	On	On	Off	On	On
4MB	3MB	On	On	On	Off	On	Off
4MB	4MB	On	On	On	On	Off	Off
4MB	5MB	On	On	On	Off	On	On
4MB	6MB	On	On	On	On	Off	On
4MB	7MB	On	On	On	On	Off	Off
4MB	8MB	On	On	On	On	On	Off
4MB	9MB	On	On	On	On	Off	On
4MB	10MB	On	On	On	On	On	On
4MB	11MB	On	On	On	On	On	Off
4MB	12MB	On	On	On	On	On	On

4MB	13MB	On	On	On	On	On	On
4MB	14MB	On	On	On	On	On	On
6MB	0MB	Off	On	On	Off	On	Off
6MB	1MB	Off	Off	On	Off	On	On
6MB	2MB	On	Off	Off	Off	On	On
6MB	3MB	Off	On	Off	On	Off	Off
6MB	4MB	On	Off	On	On	Off	Off
6MB	5MB	Off	On	On	On	Off	On
6MB	6MB	On	On	Off	On	Off	On
6MB	7MB	On	Off	Off	On	On	Off
6MB	8MB	On	On	On	On	On	Off
6MB	9MB	On	Off	On	On	On	On
6MB	10MB	On	On	On	On	On	On
8MB	0MB	Off	On	On	Off	On	Off
8MB	1MB	On	Off	Off	Off	On	On
8MB	2MB	On	Off	Off	Off	On	On

DRAM SWITCH CONFIGURATION (CON'T)

Card	Mainboard	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
8MB	3MB	On	Off	On	On	Off	Off
8MB	4MB	On	Off	On	On	Off	Off
8MB	5MB	On	On	Off	On	Off	On
8MB	6MB	On	On	Off	On	Off	On
8MB	7MB	On	On	On	On	On	Off
8MB	8MB	On	On	On	On	On	Off

DRAM SWITCH CONFIGURATION (CON'T)

Card	Mainboard	SW3/1	SW3/2	SW3/3	SW3/4	SW3/5	SW3/6
4MB	0MB	Off	Off	On	Off	Off	Off
4MB	1MB	Off	On	Off	Off	Off	On
4MB	2MB	Off	On	Off	Off	Off	On
4MB	3MB	Off	On	On	Off	On	Off
4MB	4MB	Off	On	On	Off	On	Off
4MB	5MB	On	Off	Off	Off	On	On
4MB	6MB	On	Off	Off	Off	On	On
4MB	7MB	On	Off	On	On	Off	Off
4MB	8MB	On	Off	On	On	Off	Off
4MB	9MB	On	On	Off	On	Off	On
4MB	10MB	On	On	Off	On	Off	On
4MB	11MB	On	On	On	On	On	Off
4MB	12MB	On	On	On	On	On	Off
4MB	13MB	On	On	On	On	On	On
4MB	14MB	On	On	On	On	On	On
6MB	0MB	Off	Off	On	Off	Off	Off
6MB	1MB	Off	On	Off	Off	Off	On
6MB	2MB	Off	On	Off	Off	Off	On
6MB	3MB	Off	On	On	Off	On	Off
6MB	4MB	Off	On	On	Off	On	Off
6MB	5MB	On	Off	Off	Off	On	On
6MB	6MB	On	Off	Off	Off	On	On
6MB	7MB	On	Off	On	On	Off	Off

6MB	8MB	On	Off	On	On	Off	Off
6MB	9MB	On	On	Off	On	Off	On
6MB	10MB	On	On	Off	On	Off	On
8MB	0MB	Off	Off	On	Off	Off	Off
8MB	1MB	Off	On	Off	Off	Off	On
8MB	2MB	Off	On	Off	Off	Off	On
8MB	3MB	Off	On	On	Off	On	Off
8MB	4MB	Off	On	On	Off	On	Off
8MB	5MB	On	Off	Off	Off	On	On
8MB	6MB	On	Off	Off	Off	On	On
8MB	7MB	On	Off	On	On	Off	Off
8MB	8MB	On	Off	On	On	Off	Off

Note: The second column refers to the amount of extended memory already configured in the system.