


# BEST DATA PRODUCTS, INC. SMART ONE 336F

<b>Card Type</b>	Modem (asynchronous)
<b>Chipset</b>	Unidentified
<b>I/O Options</b>	None
<b>Maximum Data Rate</b>	33.6Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Bus</b>	16-bit ISA
<b>Fax Class</b>	Class I & II
<b>Data Modulation</b>	Bell 103A/212A ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34 Rockwell V.FC
<b>Fax Modulation</b>	ITU-T V.17, V.21CH2, V.27ter, V.29
<b>Error Correction/Compression</b>	MNP5, MNP10EC, V.42, V.42bis

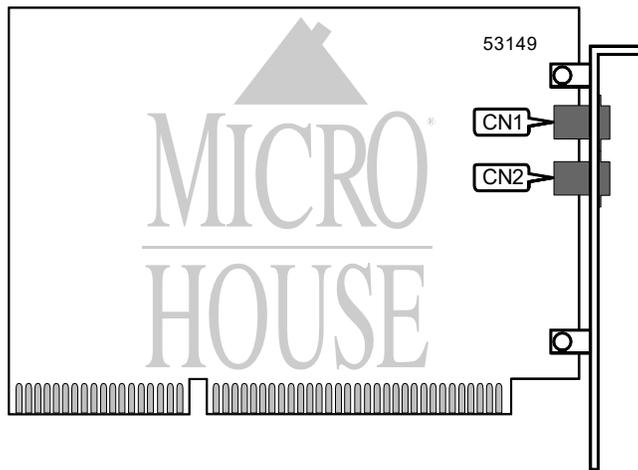

CONNECTIONS			
Function	Label	Function	Label
Line out	CN1	Line in	CN2

SUPPORTED STANDARD COMMANDS
<b>Basic AT Commands</b>
+++ , 'comma', A/
A, B, D, E, H, L, M, N, O, P, Q, T, V, W, X, Y, Z
&C, &D, &F, &G, &K, &Q, &R, &S, &T, &V, &W, &X, &Y, &Z
<b>Extended AT Commands</b>
\A, \B, \G, \K, \N
%C, %E, %L, %Q
<b>Special AT Commands</b>
#CID, :E, *H, -K, -Q, @M, +MS
<b>S-Registers</b>
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S24, S25, S26
S28, S29, S30, S31, S32, S33, S36, S38, S39, S40, S41, S46, S48, S82, S86, S91, S92, S95
Note: See MHI documentation for complete information.

Continued on next page. . .

BEST DATA PRODUCTS, INC.  
SMART ONE 336F

. . . continued from previous page

UNIDENTIFIED COMMANDS	
Command	Default
S37	0
S201	Unidentified

### Proprietary AT Command Set

DISPLAY INFORMATION	
<b>Type:</b>	Immediate
<b>Format:</b>	AT [cmds] ln [cmds]
<b>Description:</b>	Displays information requested about the modem.
Command	Function
I0	Displays product identification code.
I1	Displays ROM checksum.
I2	Tests and reports ROM checksum.
I3	Displays firmware model, revision, and interface.
I4	Displays modem model number.
I5	Displays country code.
I6	Displays data pump model and revision.
I7	Displays the DAA code.

See BEST DATA PRODUCTS, INC. SMART ONE 2834F for a full command summary.