


IOTECH, INC. PERSONAL 488/MM

Card Type	IEEE 488 interface
Chipset	NEC PD7210/IOTech IOT7210
I/O Options	IEEE 488 bus
Data Bus	8-bit PC/104

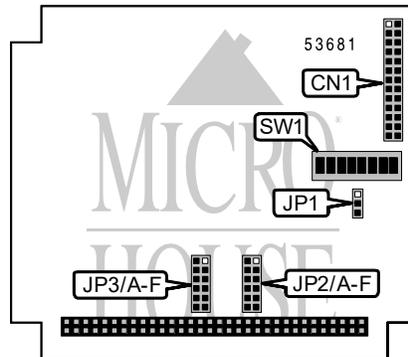

CONNECTIONS	
Function	Label
IEEE 488 bus interface	CN1
Note: A standard IEEE 488 bus connector is provided on an included adapter cable.	

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Card generates clock source	JP1	Pins 1 & 2 closed
PC/104 bus generates clock source	JP1	Pins 2 & 3 closed
í Factory configured - do not alter	SW1/6	Unidentified
í Factory configured - do not alter	SW1/7	Unidentified
í Factory configured - do not alter	SW1/8	Unidentified

INTERRUPT SELECTION									
Setting	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F	SW1/1	SW1/2	SW1/3
2	Closed	Open	Open	Open	Open	Open	On	Off	On
3	Open	Closed	Open	Open	Open	Open	Off	Off	On
4	Open	Open	Closed	Open	Open	Open	On	On	Off
5	Open	Open	Open	Closed	Open	Open	Off	On	Off
6	Open	Open	Open	Open	Closed	Open	On	Off	Off
í 7	Open	Open	Open	Open	Open	Closed	Off	Off	Off
Disabled	Open	Open	Open	Open	Open	Open	N/A	N/A	N/A

BASE I/O ADDRESS SELECTION		
Setting	SW1/4	SW1/5
í 02E1h	On	On
22E1h	Off	On
42E1h	On	Off
62E1h	Off	Off

Continued on next page. . .

IOTECH, INC.
PERSONAL488/MM

. . . continued from previous page

DMA SELECTION						
Setting	J3/A	J3/B	J3/C	J3/D	J3/E	J3/F
1	Closed	Closed	Open	Open	Open	Open
2	Open	Open	Closed	Closed	Open	Open
3	Open	Open	Open	Open	Closed	Closed
Disabled	Open	Open	Open	Open	Open	Open