


# LOGICODE TECHNOLOGY, INC.

## 14.4 INTERNAL (JUMPER VERSION)

<b>Card Type</b>	Modem (asynchronous)
<b>Chipset</b>	Unidentified
<b>Maximum Data Rate</b>	14.4Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Modulation</b>	Bell 103A, 212A ITU-T V.21, V.22, V.22bis, V.32, V.32bis
<b>Fax Modulation</b>	ITU-T V.17, V.21CH2, V.27ter, V.29
<b>Error Correction/Compression</b>	MNP5, V.42, V.42bis
<b>Fax Class</b>	Class I & II
<b>Data Bus</b>	8-bit ISA
<b>Card Size</b>	Full-height, one-third length

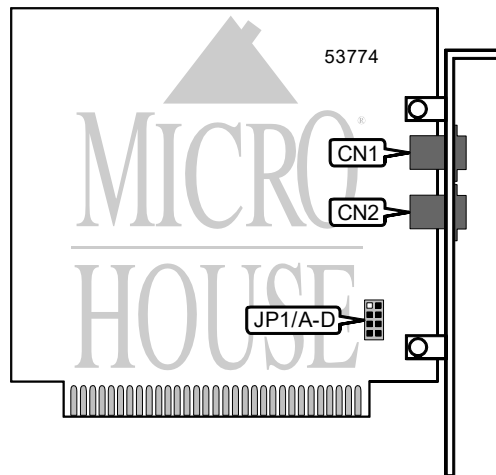

CONNECTIONS			
Function	Label	Function	Label
Telephone line	CN1	Telephone line	CN2

SERIAL PORT ADDRESS SELECTION			
Setting	JP1/A	JP1/B	
3F8h (COM1:)	Open	Open	
2F8h (COM2:)	Open	Closed	
3E8h (COM3:)	Closed	Open	
2E8h (COM4:)	Closed	Closed	

INTERRUPT SELECTION			
Setting	JP1/C	JP1/D	
2	Closed	Closed	
3	Open	Closed	
4	Open	Open	
5	Closed	Open	

Continued on next page . . .

LOGICODE TECHNOLOGY, INC.  
14.4 INTERNAL (JUMPER VERSION)

. . . continued from previous page

SUPPORTED STANDARD COMMANDS	
<b>Basic AT Commands</b>	
+++, 'comma', A/	
A, C, D, E, F, H, L, M, N, P, Q, T, V, W, X, Y, Z	
&C, &D, &F, &G, &K, &L, &P, &R, &S, &T, &V, &W, &Y, &Z	
<b>Extended AT Commands</b>	
\A, \B, \C, \G, \J, \N, \O, \Q, \T, \U, \V, \X, \Y, \Z	
%A, %C, %E, %G	
<b>Special AT Commands</b>	
-C, -J, "H, "O	
<b>S-Registers</b>	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S25, S26	
S27, S30, S37, S95	
Note: See MHI help file for complete information.	

### Proprietary AT Command Set

See LOGICODE TECHNOLOGY, INC. 9600 EXTERNAL for a full command summary.