


SEALEVEL SYSTEMS, INC. DUOCOM

Card Type	Serial card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Serial ports (2 RS-232)
Hard Drives supported	None
Floppy drives supported	None
Data Bus	8-bit ISA
Card Size	Half-length, full-height

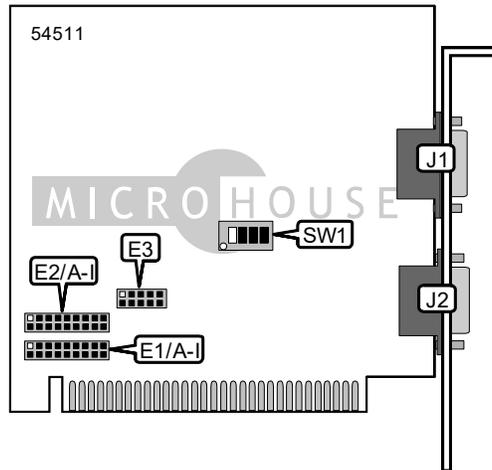

CONNECTIONS			
Function	Label	Function	Label
Serial Port 1	J1	Serial Port 2	J2

BASE I/O ADDRESS SELECTION					
Port 1	Port 2	SW1/1	SW1/2	SW1/3	SW1/4
3F8h	2F8h	On	On	On	Off
3E8h	2E8h	On	On	Off	On
2F8h	2E8h	On	On	Off	Off
2F8h	3E8h	On	Off	On	On
3220h	3228h	On	Off	On	Off
4220h	4228h	On	Off	Off	On
5220h	5228h	On	Off	Off	Off
5220h	4220h	Off	On	On	On
280h	290h	Off	On	On	Off
300h	308h	Off	On	Off	On
310h	318h	Off	On	Off	Off
280h	288h	Off	Off	On	On
290h	298h	Off	Off	On	Off
300h	280h	Off	Off	Off	On
Disabled	Disabled	Off	Off	Off	Off

Continued on next page . . .

... continued from previous page

SERIAL PORT 1 INTERRUPT SELECTION									
IRQ	E1/A	E1/B	E1/C	E1/D	E1/E	E1/F	E1/G	E1/H	E1/I
IRQ2/9	Closed	Open							
IRQ3	Open	Closed	Open						
í IRQ4	Open	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Closed	Open						
IRQ15	Open	Closed							

SERIAL PORT 2 INTERRUPT SELECTION									
IRQ	E2/A	E2/B	E2/C	E2/D	E2/E	E2/F	E2/G	E2/H	E2/I
IRQ2/9	Closed	Open							
í IRQ3	Open	Closed	Open						
IRQ4	Open	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ12	Open	Closed	Open						
IRQ15	Open	Closed							

SERIAL INTERRUPT MODE SELECTION	
IRQ	E3
í Normal	Pins 1 & 3, 2 & 4 closed
Shared Interrupt mode	Pins 3 & 5, 6 & 8 closed
Shared Interrupt mode when using more than one DUOCOM	Pins 3 & 5, 4 & 6 closed
None	Open