


SEALEVEL SYSTEMS, INC.

C4-104

Card Type Serial card
Chip Set Unidentified
I/O Options Serial ports (4), PC/104 connectors (2)
Data Bus Unidentified

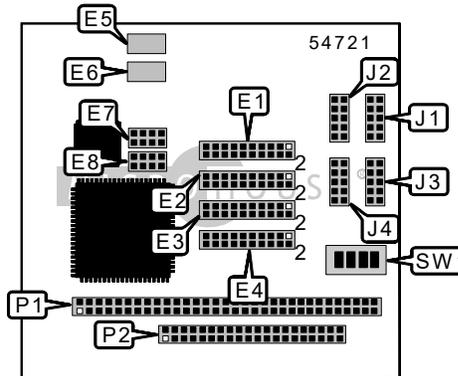

CONNECTIONS			
Function	Label	Function	Label
Serial port	J1	Serial port	J4
Serial port	J2	PC/104 connector (8-bit)	P1
Serial port	J3	PC/104 connector (16-bit)	P2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured – do not alter	E5	Unidentified
í Factory configured – do not alter	E6	Unidentified

SERIAL PORT ADDRESS SELECTION							
Port 1	Port 2	Port 3	Port 4	SW1/1	SW1/2	SW1/3	SW1/4
í3F8	2F8	3E8	2E8	On	On	On	On
2F8	3E8	2E8	2E0	On	On	On	Off
3E8	2E8	280	288	On	On	Off	On
280	288	290	298	On	On	Off	Off
2A0	2A8	2B0	2B8	On	Off	On	On
500	508	510	518	On	Off	On	Off
580	588	590	598	On	Off	Off	On

Continued on next page...

SEALEVEL SYSTEMS, INC.
C4-104

... continued from previous page

SERIAL PORT 1 INTERRUPT SELECTION	
IRQ	E1
2/9	Pins 1 & 2 closed
3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed
iR	Pins 19 & 20 closed

Note: IRQ R connects a 1k ohm pull down resistor to allow multiple ports to share a single IRQ.

SERIAL PORT 2 INTERRUPT SELECTION	
IRQ	E2
2/9	Pins 1 & 2 closed
3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed
iR	Pins 19 & 20 closed

SERIAL PORT 3 INTERRUPT SELECTION	
IRQ	E3
2/9	Pins 1 & 2 closed
3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed
iR	Pins 19 & 20 closed

Continued on next page. . .

SEALEVEL SYSTEMS, INC.
C4-104

... continued from previous page

SERIAL PORT 4 INTERRUPT SELECTION	
IRQ	E4
2/9	Pins 1 & 2 closed
3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed
iR	Pins 19 & 20 closed

SERIAL PORT 1 SELECTION	
Setting	E7
RS-485 enabled	Pins 1 & 2 closed
RS-485 echo disabled	Pins 3 & 4 closed

SERIAL PORT 2 SELECTION	
Setting	E7
RS-485 enabled	Pins 5 & 6 closed
RS-485 echo disabled	Pins 7 & 8 closed

SERIAL PORT 3 SELECTION	
Setting	E8
RS-485 enabled	Pins 1 & 2 closed
RS-485 echo disabled	Pins 3 & 4 closed

SERIAL PORT 4 SELECTION	
Setting	E8
RS-485 enabled	Pins 5 & 6 closed
RS-485 echo disabled	Pins 7 & 8 closed