


DIALOGIC CORPORATION

D/42D-SL

Card Type	Switch Integration card
Chip Set	Intel
Maximum Onboard Memory	Unidentified
I/O Options	RJ-14 jacks (4)
Data Bus	8-bit ISA
Card Size	Full-length, full-height

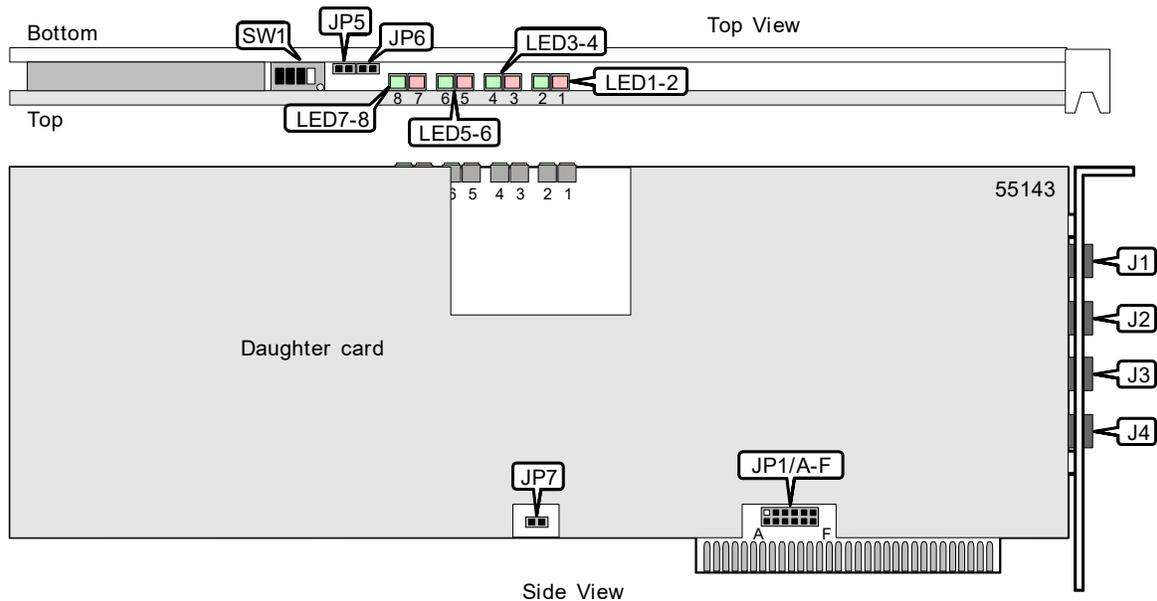

CONNECTIONS			
Function	Label	Function	Label
Channel 1 via RJ-14	J1	Channel 3 via RJ-14	J3
Channel 2 via RJ-14	J2	Channel 4 via RJ-14	J4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Interrupt settings for single board enabled	JP7	Closed
Interrupt settings for multiple boards enabled	JP7	Open
Set for On-hook operation	SW 1/4	Off
Set for Off-hook operation	SW 1/4	On

BASE I/O ADDRESS SELECTION		
Setting	JP5	JP6
Interrupt settings for single board enabled	Open	Open
Interrupt settings for multiple boards enabled	Closed	Open
Set for On-hook operation	Open	Closed

Continued on next page...

DIALOGIC CORPORATION

D/42D-SL

...continued from previous page

OFFSET I/O ADDRESS SELECTION			
Setting	SW1/1	SW1/2	SW1/3
í 0000h	Off	Off	Off
2000h	Off	Off	On
4000h	Off	On	Off
6000h	Off	On	On
8000h	On	Off	Off
A000h	On	Off	On
C000h	On	On	Off
E000h	On	On	On

INTERRUPT SELECTION						
IRQ	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F
IRQ2/9	Closed	Open	Open	Open	Open	Open
í IRQ3	Open	Closed	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open
IRQ6	Open	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Open	Closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	Channel 1 - off hook
LED1	Red	Off	Channel 1 - on hook
LED2	Green	On	Channel 1 - No communications with PBX detected
LED2	Green	Blinking	Channel 1 - Communications with PBX detected
LED2	Green	Off	Channel 1 - No communications with PBX detected
LED3	Red	On	Channel 2 - off hook
LED3	Red	Off	Channel 2 - on hook
LED4	Green	On	Channel 2 - No communications with PBX detected
LED4	Green	Blinking	Channel 2 - Communications with PBX detected
LED4	Green	Off	Channel 2 - No communications with PBX detected
LED5	Red	On	Channel 3 - off hook
LED5	Red	Off	Channel 3 - on hook
LED6	Green	On	Channel 3 - No communications with PBX detected
LED6	Green	Blinking	Channel 3 - Communications with PBX detected
LED6	Green	Off	Channel 3 - No communications with PBX detected
LED7	Red	On	Channel 4 - off hook
LED7	Red	Off	Channel 4 - on hook
LED8	Green	On	Channel 4 - No communications with PBX detected
LED8	Green	Blinking	Channel 4 - Communications with PBX detected
LED8	Green	Off	Channel 4 - No communications with PBX detected