


# RAYTECH RT-1206

Data bus: 16-bit ISA  
 Size: Three quarter-length, full-height card  
 Hard drive supported: One IDE (AT) interface drive  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB drives

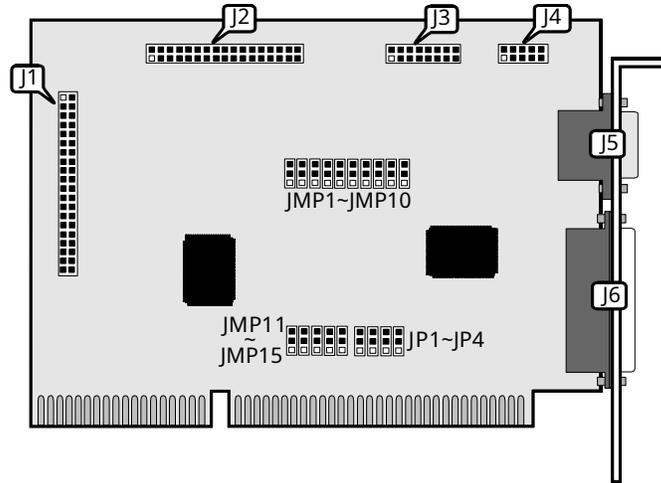

CONNECTIONS			
Function	Location	Function	Location
Parallel port	J6	Game port	J3
Serial port 1	J5	Floppy drive interface	J2
Serial port 2	J4	IDE interface	J1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive interface enabled	JMP9	pins 1 & 2 closed
Floppy drive interface disabled	JMP9	pins 2 & 3 closed
í LPT IRQ 7	JMP11	pins 1 & 2 closed
LPT IRQ 5	JMP11	pins 2 & 3 closed
í IDE interface enabled	JMP8	pins 1 & 2 closed
IDE interface disabled	JMP8	pins 2 & 3 closed
í Game interface enabled	JMP10	pins 1 & 2 closed
Game interface disabled	JMP10	pins 2 & 3 closed
í IDE address 1	JMP7	pins 1 & 2 closed
IDE address 2	JMP7	pins 2 & 3 closed

Continued on next page. . .

...continued from previous page

PARALLEL PORT CONFIGURATION		
Parallel	JMP5	JMP6
LPT0	pins 2 & 3 closed	pins 2 & 3 closed
LPT1	pins 1 & 2 closed	pins 1 & 2 closed
LPT2	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	pins 1 & 2 closed

COM A PORT CONFIGURATION		
J5	JMP1	JMP2
Disabled	pins 2 & 3 closed	pins 2 & 3 closed
COM1	pins 1 & 2 closed	pins 2 & 3 closed
COM2	pins 1 & 2 closed	pins 1 & 2 closed
COM3	pins 2 & 3 closed	pins 1 & 2 closed

COM B PORT CONFIGURATION		
J4	JMP3	JMP4
Disabled	pins 2 & 3 closed	pins 2 & 3 closed
COM2	pins 1 & 2 closed	pins 1 & 2 closed
COM1	pins 1 & 2 closed	pins 2 & 3 closed
COM4	pins 2 & 3 closed	pins 1 & 2 closed

SERIAL PORT IRQ CONFIGURATION			
Port A (J5)	JMP	Port B (J4)	IRQ
pins 1 & 2 closed	JMP12	pins 2 & 3 closed	IRQ2
pins 1 & 2 closed	JMP13	pins 2 & 3 closed	IRQ3
pins 1 & 2 closed	JMP14	pins 2 & 3 closed	IRQ4
pins 1 & 2 closed	JMP15	pins 2 & 3 closed	IRQ5