


PORT SETTINGS

PORT SELECTION JPI

JUMPER	PINS SHORTED		FUNCTION
1 - 2 (1st serial)	1	2	*COM1 (3F8) selected COM3 (3E8) selected 1st serial port disable
	B	B	
	A	B	
3 - 4 (2nd serial)	3	4	*COM2 (2F8) selected COM4 (2E8) selected 2nd serial port disable
	B	B	
	A	B	
5 - 6 (Printer port)	5	6	*LPT1 (378) selected LPT2 (278) selected Printer port disable
	B	B	
	A	B	
7 (Game port)	B	A	*Game port enable Game port disable

Remarks: *X* stands for don't care and ** stands for the default setting.

PCB LAYOUT

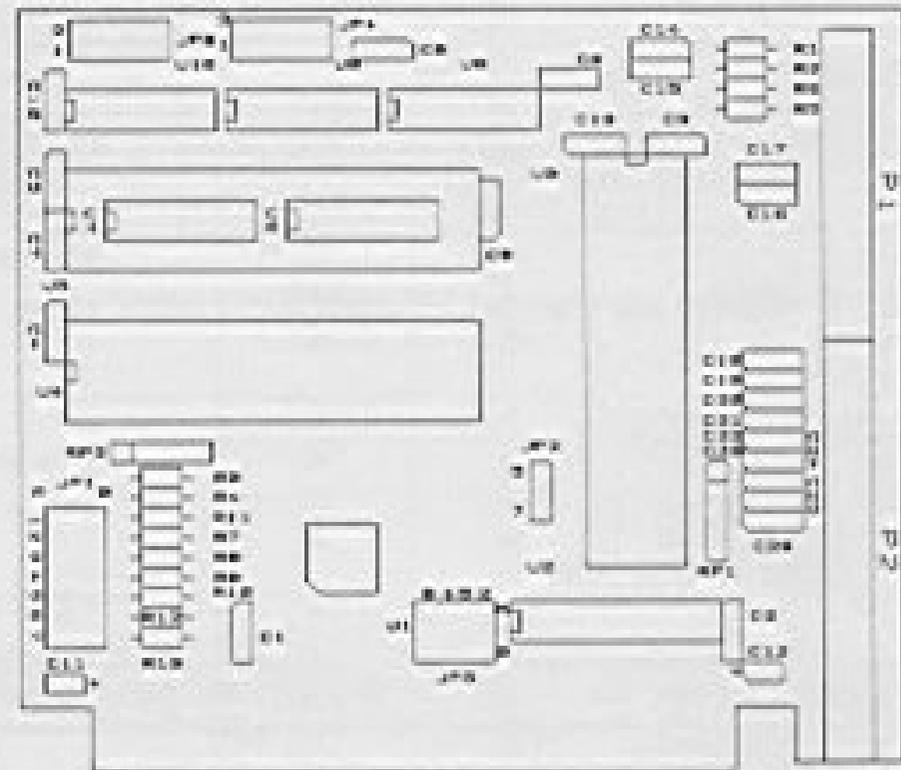

INTERRUPT LEVEL JP2 & JP5

PORT	JUMPER	PINS SHORTED	INTERRUPT LEVEL
Printer	JP2	7	*IRQ7
		5	IRQ5
1st Serial	JP5A	2	IRQ2
		3	IRQ3
		4	*IRQ4
		5	IRQ5
2nd Serial	JP5B	2	IRQ2
		3	*IRQ3
		4	IRQ4
		5	IRQ5

AT MULTI I/O

MODEL : CA8201 / CA8202

www.tdnsservices.com