



Products  
 Customer Info  
 Warranty Info  
 Service Centers  
 Dealers  
 FAQs  
 Software Library  
 Employment  
 Home




## CD-ROM Drives

### IDE Plus - V3 Prime Controller Card

#### Connector Description

- ASYN1:** Serial 1
- ASYN2:** Serial 2
- Floppy** Floppy disk
- IDE:** IDE hard disk
- Game:** Game port
- Printer:** Printer port
- LED:** Hard disk busy: LED connector
- COM1:** IRQ 3-5 and IRQ 7, 9 select jumpers
- COM2:** IRQ 3-5 and IRQ 7, 9 select jumpers
- PTR:** IRQ 3-5 and IRQ7, 9 select jumpers

<u>Configuration Switch Definition</u>			
JMP	Description	Position	
		1-2	2-3
JP1	FDD port select	*Primary (3F0-3F7)	*Secondary (370-377)
JP2	AT IDE port select	*Primary (1F0-1F7)	*Secondary (170-177)
JP3	Printer port select	LPT1 (378-37F)	LPT2 (278-27F)
JP4	ASYN1 enable/disable	Enable	Disable
JP5	FDD enable/disable	Enable	Disable
JP6	AT IDE enable/disable	Enable	Disable
JP7	ASYN2 2 port select	COM2 (2F8-2FF)	COM4 (2E8-2EF)
JP8	ASYN2 1 port select	COM1 (3F8-3FF)	COM3 (3E8-3EF)
JP9	ASYN2 enable/disable	Enable	Disable
JP10	PRT enable/disable	Enable	Disable

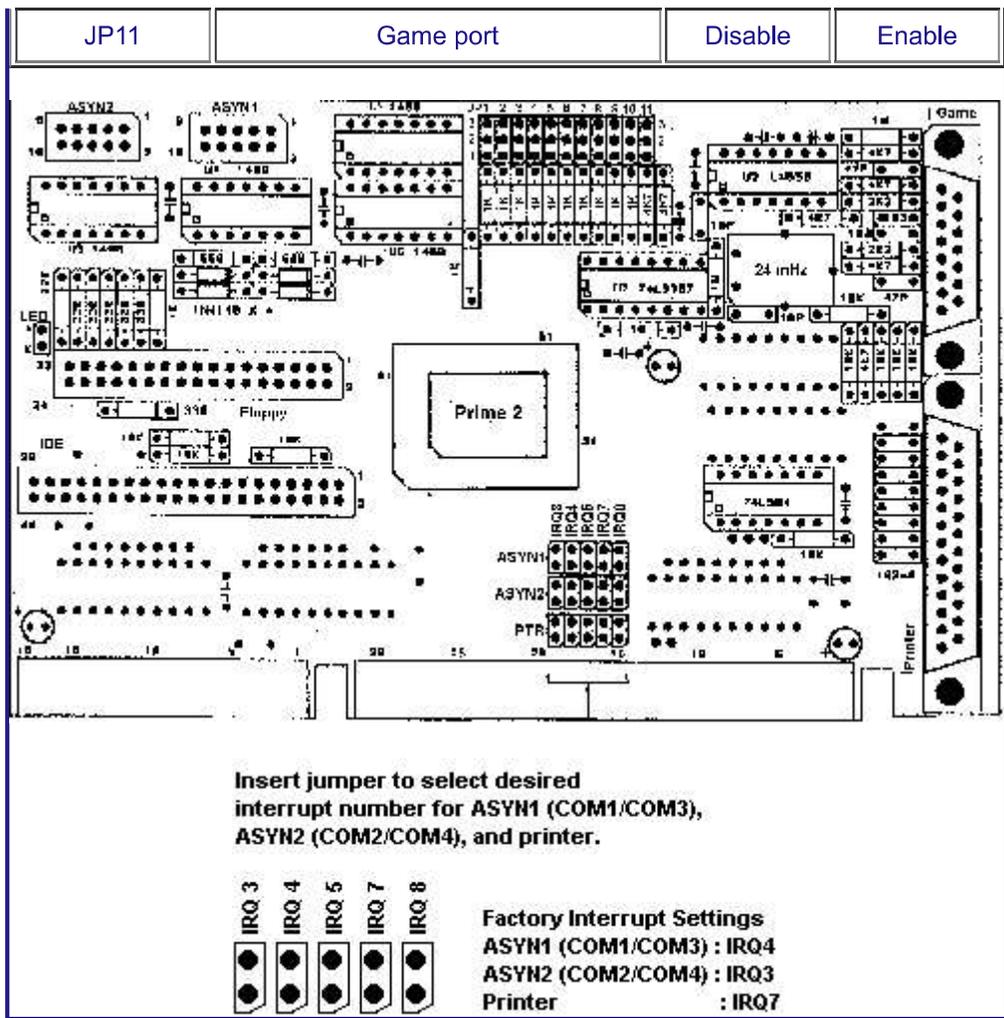

E-Mail [Technical Support](#)

[Products](#) | [Customer Info](#) | [Warranty Info](#) | [Service Centers](#)  
[Dealers](#) | [FAQs](#) | [Software Library](#) | [Employment](#) | [Home](#)

© 1999 LG Electronics Service