


ABC COMPUTER COMPANY, LTD. COMPACT 286 VER. 2

Processor	80286
Processor Speed	20MHz
Chip Set	C & T
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

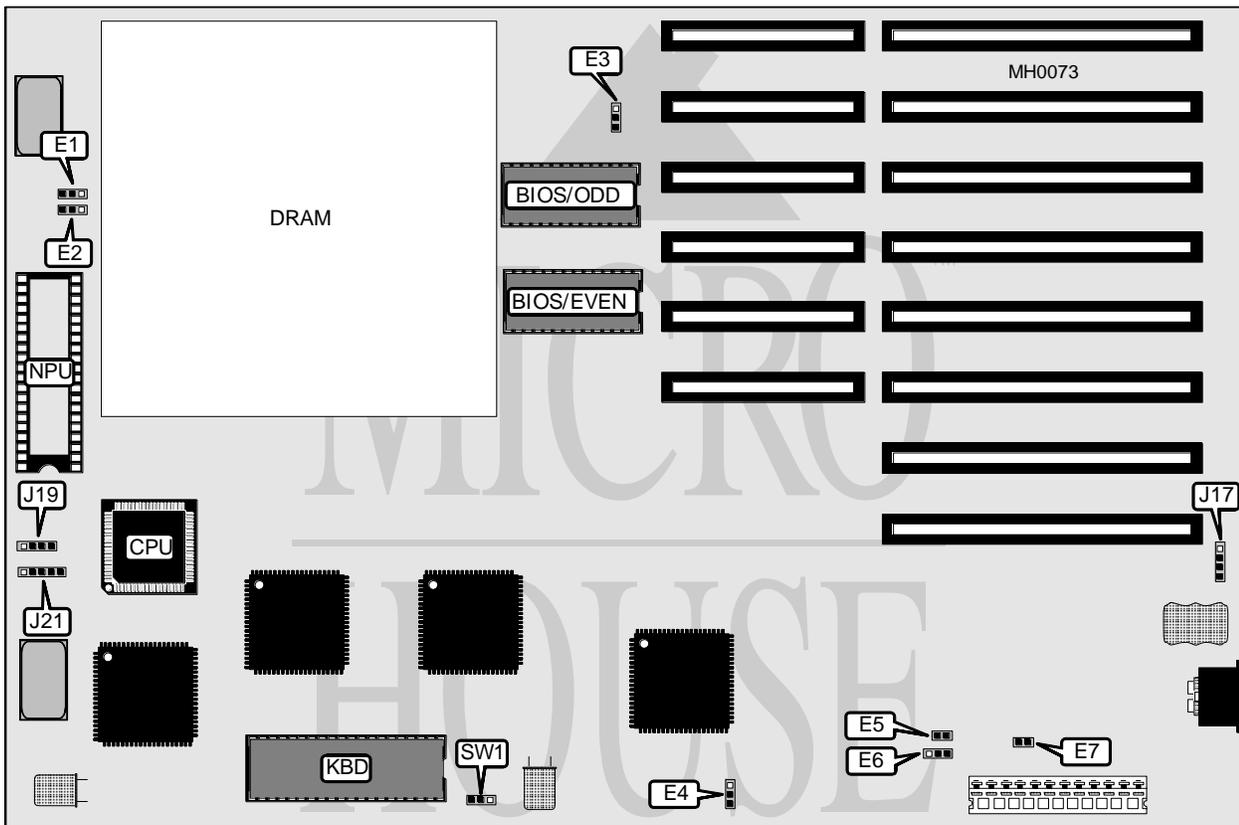

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	E5	Speaker	J19
MIPS counter	E7	Power LED & keylock	J21
External battery	J17		

Continued on next page . . .

ABC COMPUTER COMPANY, LTD.
 COMPACT 286 VER. 2

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU speed select 10MHz	E1 & E2	pins 1 & 2 closed
NPU speed select slow	E1 & E2	pins 2 & 3 closed
í BIOS type select 27128	E3	pins 1 & 2 closed
BIOS type select 27256	E3	pins 2 & 3 closed
í CMOS memory normal operation	E4	pins 1 & 2 closed
CMOS memory clear	E4	pins 2 & 3 closed
í Reset enabled through hardware only	E6	pins 1 & 2 closed
Reset enabled through hardware and keyboard	E6	pins 2 & 3 closed
í Monitor type select monochrome	SW1	pins 1 & 2 closed
Monitor type select color	SW1	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(18) 41256	NONE	NONE	NONE
640KB	(18) 41256	(18) 4164	NONE	NONE
1MB	(18) 41256	(18) 41256	NONE	NONE
1.5MB	(18) 41256	(18) 41256	(18) 41256	NONE
1.64MB	(18) 41256	(18) 4164	(18) 41256	(18) 41256
2MB	(18) 41256	(18) 41256	(18) 41256	(18) 41256
2MB	(18) 411000	NONE	NONE	NONE
3MB	(18) 41256	(18) 41256	(18) 411000	NONE
4MB	(18) 411000	(18) 411000	NONE	NONE
4.64MB	(18) 41256	(18) 4164	(18) 411000	(18) 411000
5MB	(18) 41256	(18) 41256	(18) 411000	(18) 411000
6MB	(18) 411000	(18) 411000	(18) 411000	NONE
8MB	(18) 411000	(18) 411000	(18) 411000	(18) 411000

Note: Locations of banks within the DRAM area are unknown.