


IBM CORPORATION PS/2 MODEL 50 TYPE 1

| | |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Processor | 80286 |
| Processor Speed | 10MHz |
| Chip Set | None |
| Max. Onboard DRAM | 2MB |
| Cache | None |
| BIOS | IBM |
| Dimensions | 355mm x 304mm |
| I/O Options | Serial port, parallel port, pointing device connector, video card slot, video port, hard drive interface slot, floppy drive interface slot |
| NPU Options | 80287 |

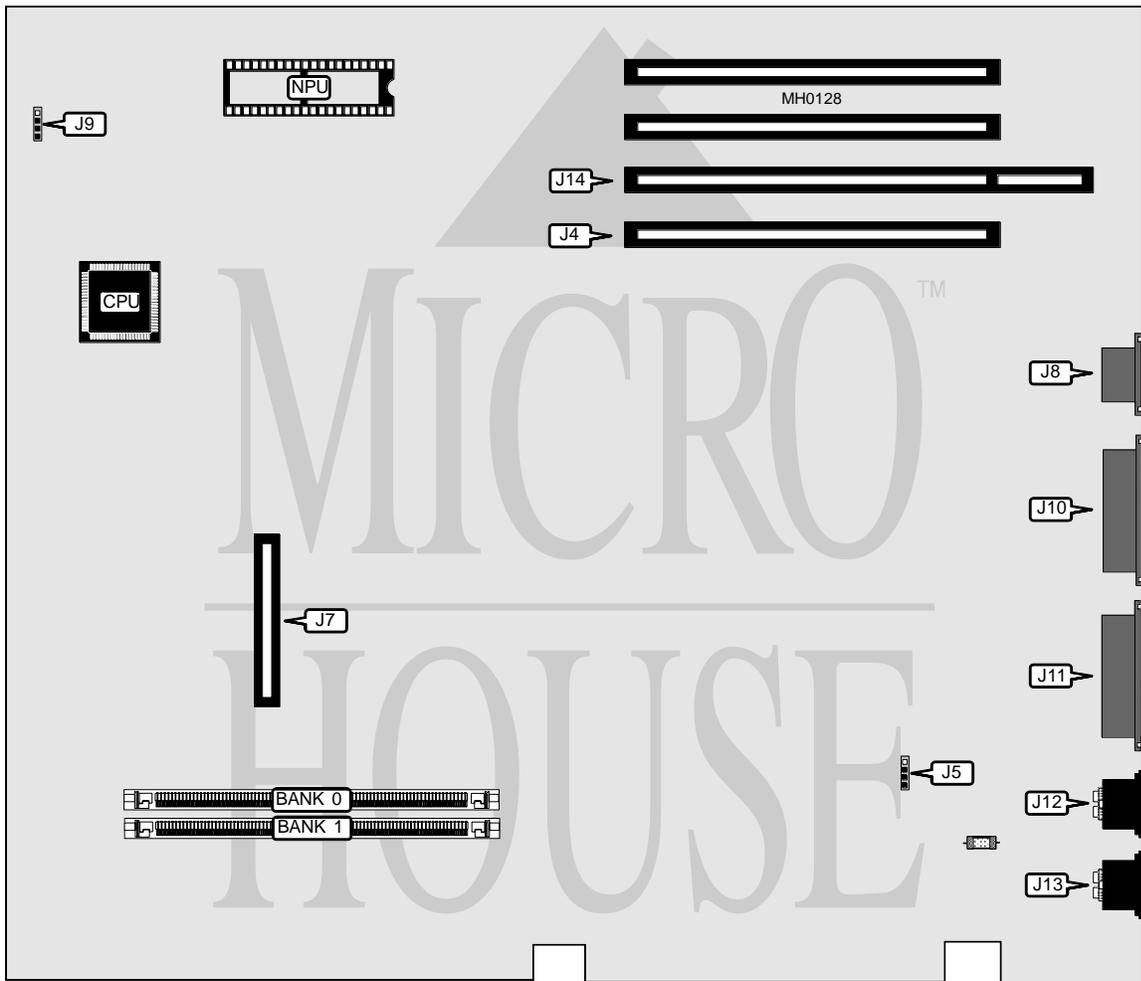

| CONNECTIONS | | | |
|-----------------------------|----------|---------------------|----------|
| Purpose | Location | Purpose | Location |
| Hard drive slot | J4 | Serial port | J10 |
| Fan | J5 | Parallel port | J11 |
| Floppy drive interface slot | J7 | Pointing device | J12 |
| Video port | J8 | Keyboard | J13 |
| Battery/speaker | J9 | MCA Video card slot | J14 |

Continued on next page . . .

IBM CORPORATION
PS/2 MODEL 50 TYPE 1*... continued from previous page*

| DRAM CONFIGURATION | | |
|--------------------|---------------|---------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (1) 256K x 36 | NONE |
| 2MB | (1) 256K x 36 | (1) 256K x 36 |

Note: Onboard memory does not have to be installed in order to use memory expansion cards.