


# UNIDENTIFIED

## SPM 386-33C REV. 1.5A

**Processor** 80386DX  
**Processor Speed** 33MHz  
**Chip Set** C & T  
**Max. Onboard DRAM** 32MB  
**Cache** 64/256KB  
**BIOS** AMI  
**Dimensions** 330mm x 218mm  
**I/O Options** 32-bit external memory card slot  
**NPU Options** 80387/3167

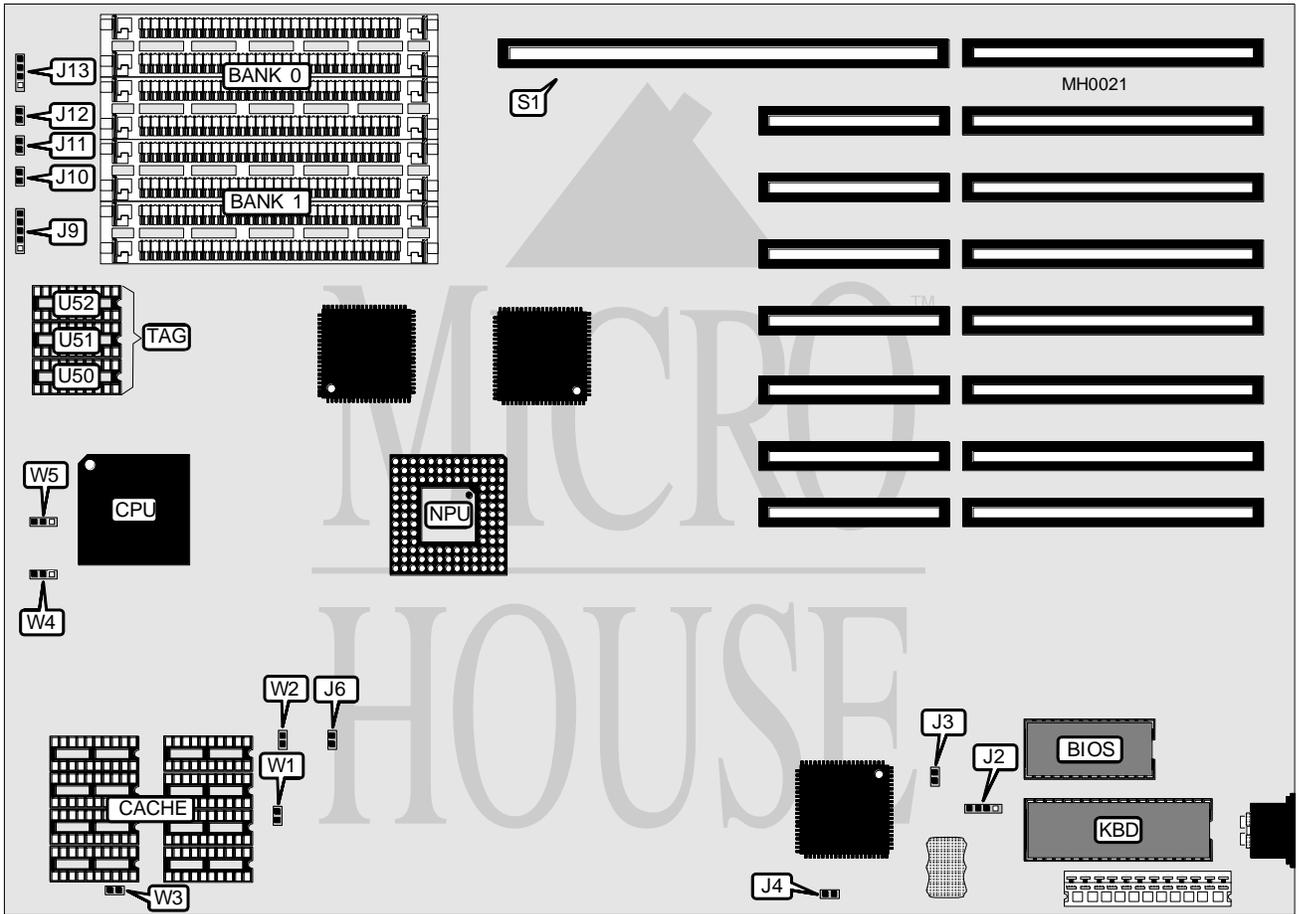

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo LED	J12
Power LED & keylock	J9	Speaker	J13
Reset switch	J10	32-bit external memory card	S1
Turbo switch	J11		

Continued on next page . . .

## UNIDENTIFIED

## SPM 386-33C REV. 1.5A

... continued from previous page

## USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Monitor type select color	J3	Closed
Monitor type select monochrome	J3	Open
í CMOS memory normal operation	J4	Open
CMOS memory clear	J4	Closed
í NPU mode select synchronous with CPU	J6	Open
NPU mode select asynchronous with CPU	J6	Closed

## DRAM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

## CACHE CONFIGURATION

Size	Bank 0	TAG (U50)	TAG (U51)	TAG (U52)
64KB	(8) 16K x 4	(1) 16K x 4	(1) 16K x 4	NONE
256KB	(8) 64K x 4	(1) 64K x 4	(1) 64K x 4	(1) 64K x 4

## CACHE JUMPER CONFIGURATION

Size	W1	W2	W3	W4	W5
64KB	Closed	Closed	Closed	pins 2 & 3 closed	pins 2 & 3 closed
256KB	Open	Open	Open	pins 1 & 2 closed	pins 1 & 2 closed