


# UNIDENTIFIED

## JCP 386SX-16

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	5MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Parallel port, serial ports (2), floppy interface, IDE interface
<b>NPU Options</b>	80387SX

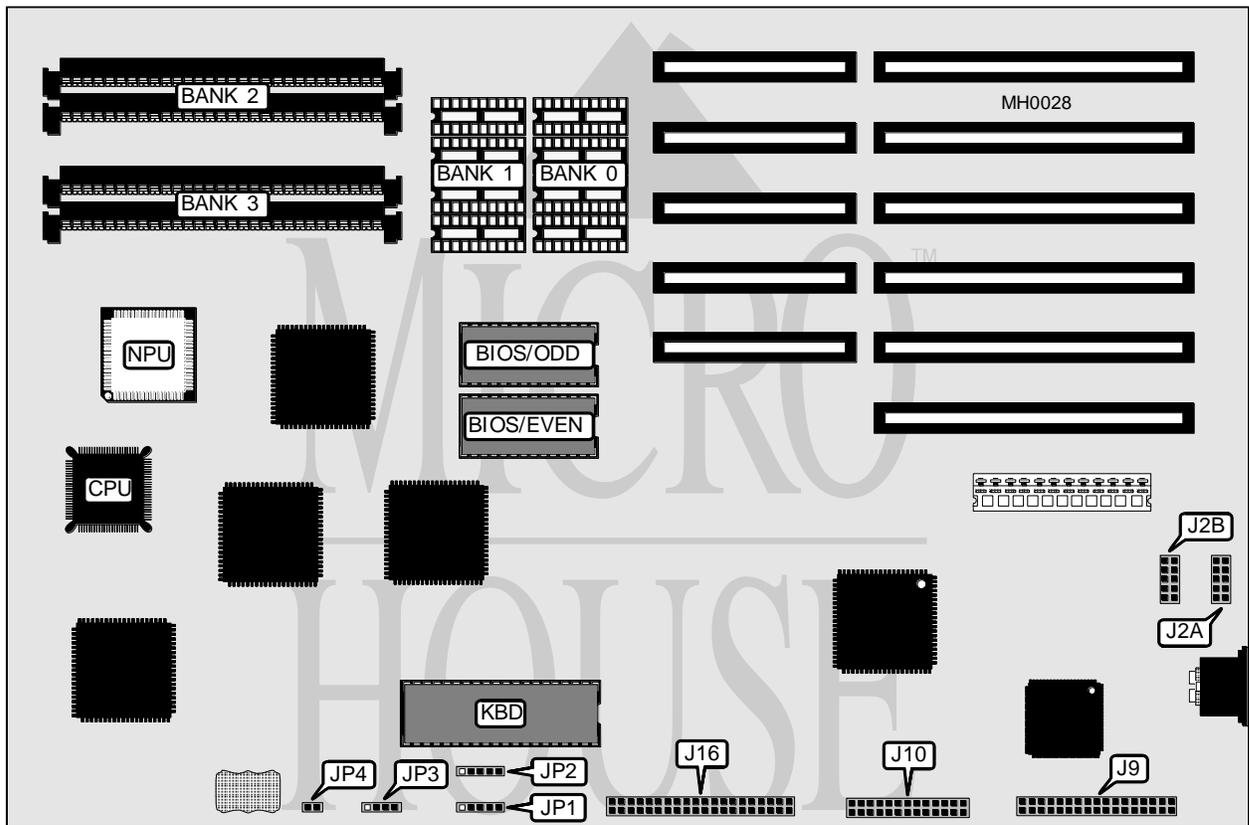

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port (COM2)	J2A	IDE interface LED	JP2
Serial port (COM1)	J2B	Speaker	JP3
Parallel port	J10	Reset switch	JP4
Power LED & keylock	JP1		

Continued on next page . . .

**UNIDENTIFIED****JCP 386SX-16**

... continued from previous page

<b>DRAM CONFIGURATION</b>				
<b>Size</b>	<b>Bank 0</b>	<b>Bank 1</b>	<b>Bank 2</b>	<b>Bank 3</b>
1MB	(4) 44256	(4) 44256	NONE	NONE
1.5MB	(4) 44256	(4) 44256	(2) 256K x 9	NONE
2MB	(4) 44256	(4) 44256	(2) 256K x 9	(2) 256K x 9
3MB	(4) 44256	(4) 44256	(2) 1M x 9	NONE
5MB	(4) 44256	(4) 44256	(2) 1M x 9	(2) 1M x 9

Note: The location of Banks 0 and 1 are unidentified.