


EVERSOURCE COMPUTERS, INC.

G 2 80286

Processor	80286
Processor Speed	12/16MHz
Chip Set	Headland
Max. Onboard DRAM	4MB
Cache	None
BIOS	AMI/Award/Phoenix/Quadtel
Dimensions	220mm x 200mm
I/O Options	None
NPU Options	80287

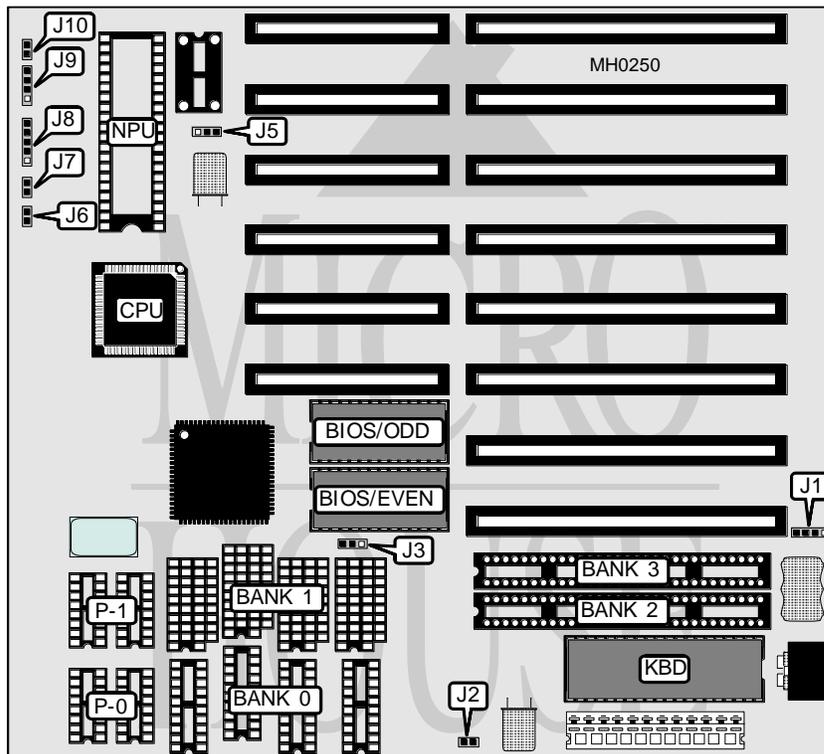

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Power LED & keylock	J8
Reset switch	J6	Speaker	J9
Turbo LED	J7	Turbo switch	J10

Continued on next page . . .

EVERSOURCE COMPUTERS, INC.**G2 80286**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J2	Closed
Monitor type select monochrome	J2	Open
BIOS type select 27256	J3	pins 1 & 2 closed
BIOS type select 27128	J3	pins 2 & 3 closed
í NPU mode select synchronous with CPU	J5	pins 1 & 2 closed
NPU mode select asynchronous with CPU	J5	pins 2 & 3 closed

DRAM CONFIGURATION						
Size	Bank 0(DIP)	P-0 (parity)	Bank 1 (DIP)	P-1 (parity)	Bank 2 (SIP)	Bank 3 (SIP)
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(2) 256K x 9	NONE
640KB	(4) 44256	(2) 41256	(4) 4464	(2) 41256	NONE	NONE
640KB	NONE	NONE	(4) 4464	(2) 41256	(2) 256K x 9	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 256K x 9
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9