


ABC COMPUTER COMPANY, LTD. PRESTIGE 386

Processor 80386DX
Processor Speed 25MHz
Chip Set C & T
Max. Onboard DRAM 16MB
Cache None
BIOS AMI
Dimensions 330mm x 218mm
I/O Options None
NPU Options 80287/80387/3167

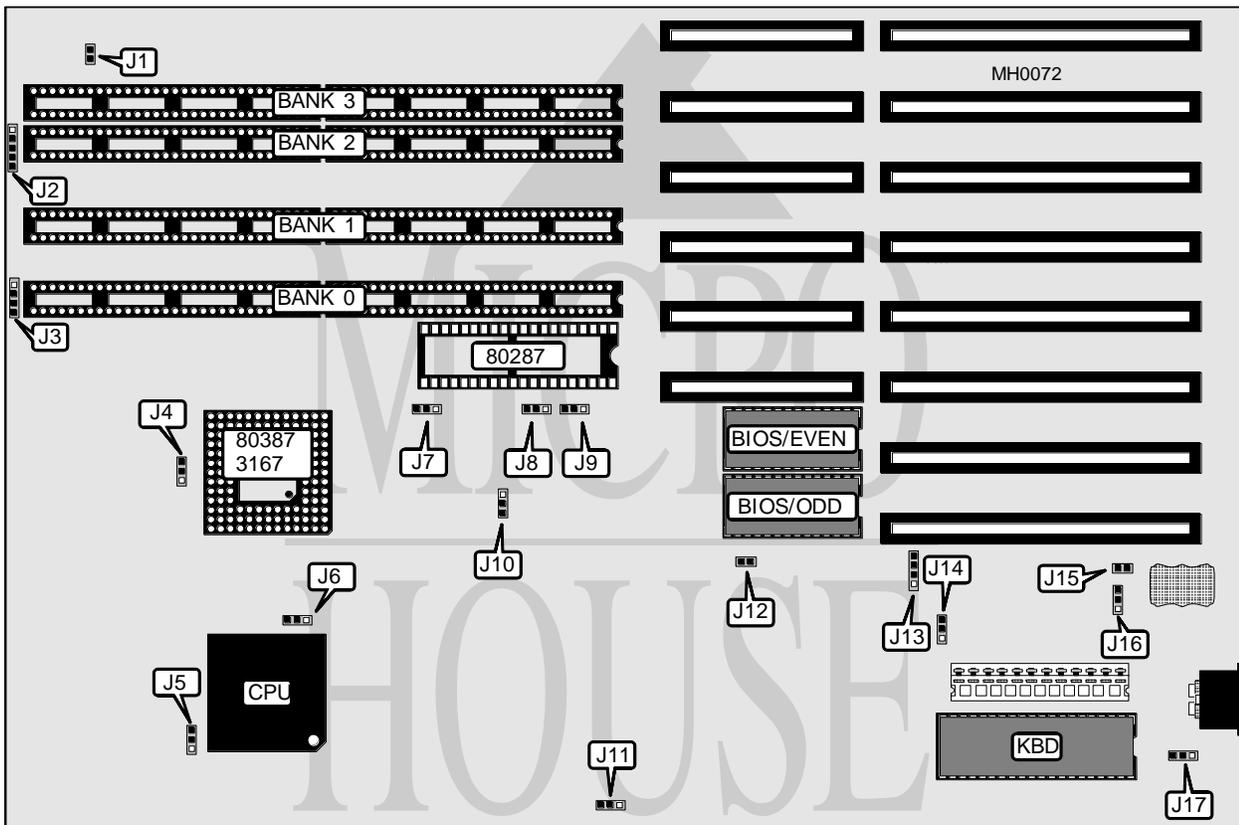

| CONNECTIONS | | | |
|---------------------|----------|---------|----------|
| Purpose | Location | Purpose | Location |
| Turbo LED | J1 | Speaker | J3 |
| Power LED & keylock | J2 | | |

Continued on next page . . .

ABC COMPUTER COMPANY, LTD.

PRESTIGE 386

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|---|--------|-------------------|
| Function | Jumper | Position |
| í Pipeline mode enabled | J5 | pins 2 & 3 closed |
| Pipeline mode disabled | J5 | pins 1 & 2 closed |
| í Factory configured - do not alter | J6 | pins 1 & 2 closed |
| í CMOS memory normal operation | J14 | pins 1 & 2 closed |
| CMOS memory clear | J14 | pins 2 & 3 closed |
| í Reset enabled through hardware only | J16 | pins 2 & 3 closed |
| Reset enabled through hardware and keyboard | J16 | pins 1 & 2 closed |
| í Monitor type select color | J17 | pins 2 & 3 closed |
| Monitor type select monochrome | J17 | pins 1 & 2 closed |

| DRAM CONFIGURATION | | | | | |
|--------------------|---------|--------------|--------------|--------------|--------------|
| Size | File | Bank 0 | Bank 1 | Bank 2 | Bank 3 |
| 1MB | 1M.386 | (4) 256K x 9 | NONE | NONE | NONE |
| 2MB | 2M.386 | (4) 256K x 9 | (4) 256K x 9 | NONE | NONE |
| 4MB | 4MK.386 | (4) 256K x 9 |
| 4MB | 4MM.386 | (4) 1M x 9 | NONE | NONE | NONE |
| 8MB | 8M.386 | (4) 1M x 9 | (4) 1M x 9 | NONE | NONE |
| 10MB | 10M.386 | (4) 256K x 9 | (4) 256K x 9 | (4) 1M x 9 | (4) 1M x 9 |
| 16MB | 16M.386 | (4) 1M x 9 |

Note: After installing memory, run the setup 386 program and enter the applicable file name.
This loads the appropriate values into the chipset.

| NPU CONFIGURATION | | | | |
|-------------------|-------------------|-------------------|-------------------|-------------------|
| Type | J4 | J7 | J10 | J11 |
| 3167 | pins 1 & 2 closed | pins 1 & 2 closed | pins 2 & 3 closed | pins 2 & 3 closed |
| 80387 | pins 2 & 3 closed | pins 1 & 2 closed | pins 2 & 3 closed | pins 1 & 2 closed |
| 80287 | pins 2 & 3 closed | pins 2 & 3 closed | pins 1 & 2 closed | pins 2 & 3 closed |
| None | pins 2 & 3 closed | pins 1 & 2 closed | pins 2 & 3 closed | pins 2 & 3 closed |

| NPU SPEED CONFIGURATION (80287) | | |
|---------------------------------|-------------------|-------------------|
| Speed | J8 | J9 |
| High | pins 1 & 2 closed | pins 1 & 2 closed |
| Low | pins 2 & 3 closed | pins 2 & 3 closed |