


MULTIBEST INDUSTRIAL & MANUFACTURING, INC.

M B 3 8 6 6

Processor	80386DX
Processor Speed	25/33MHz
Chip Set	C & T
Max. Onboard DRAM	32MB
Cache	64/256KB
BIOS	C & T
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387/3167

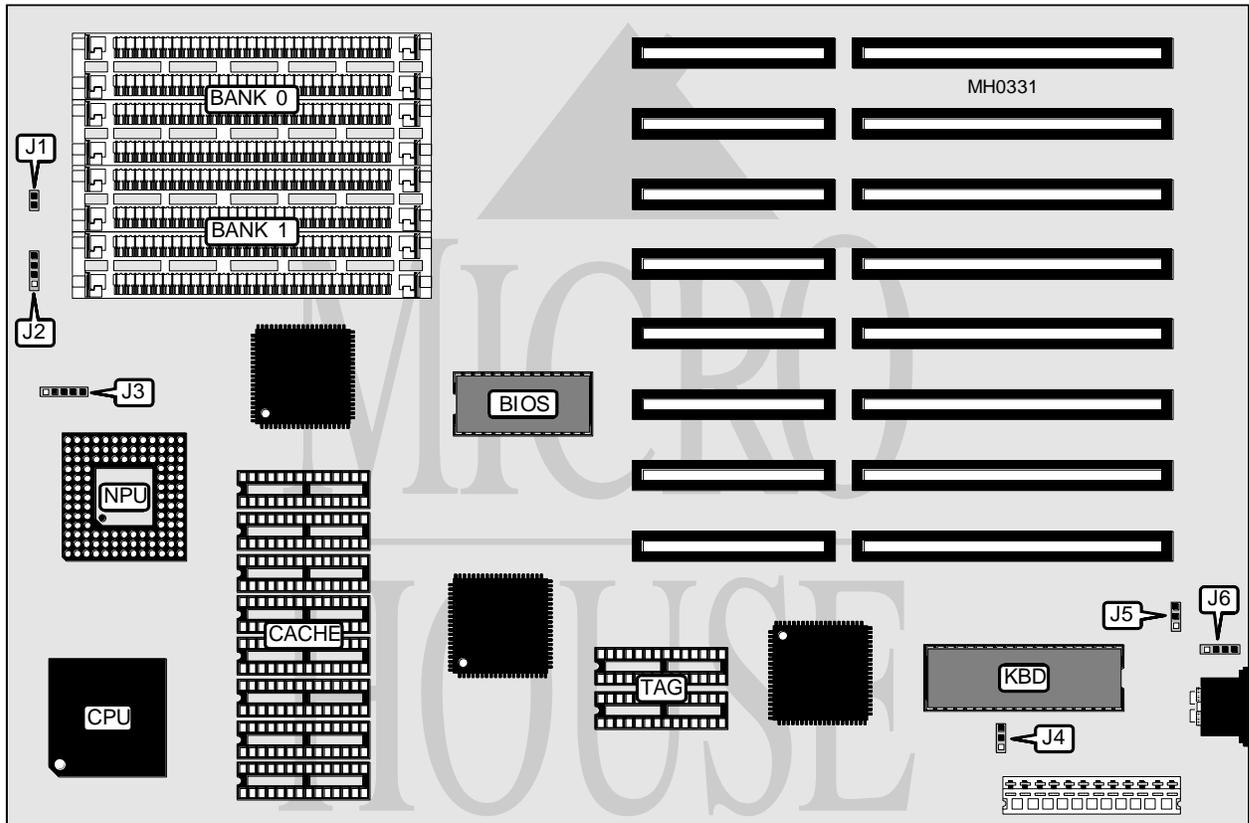

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J1	Power LED & keylock	J3
Speaker	J2	External battery	J6

Continued on next page . . .

MULTIBEST INDUSTRIAL & MANUFACTURING, INC.
M B 3 8 6 6

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J4	pins 1 & 2 closed
Monitor type select monochrome	J4	pins 2 & 3 closed
í CMOS memory normal operation	J5	pins 2 & 3 closed
CMOS memory clear	J5	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

SRAM CONFIGURATION		
Size	Bank 0	TAG
64KB	(8) 8K x 8	(2) 8K x 8
256KB	(8) 32K x 8	(2) 32K x 8