


GCH SYSTEMS, INC.  
EASY DATA 386

<b>Processor</b>	80386DX
<b>Processor Speed</b>	25/33MHz
<b>Chip Set</b>	None
<b>Max. Onboard DRAM</b>	None
<b>Cache</b>	32KB
<b>BIOS</b>	AMI/Award/Phoenix
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80387/3167

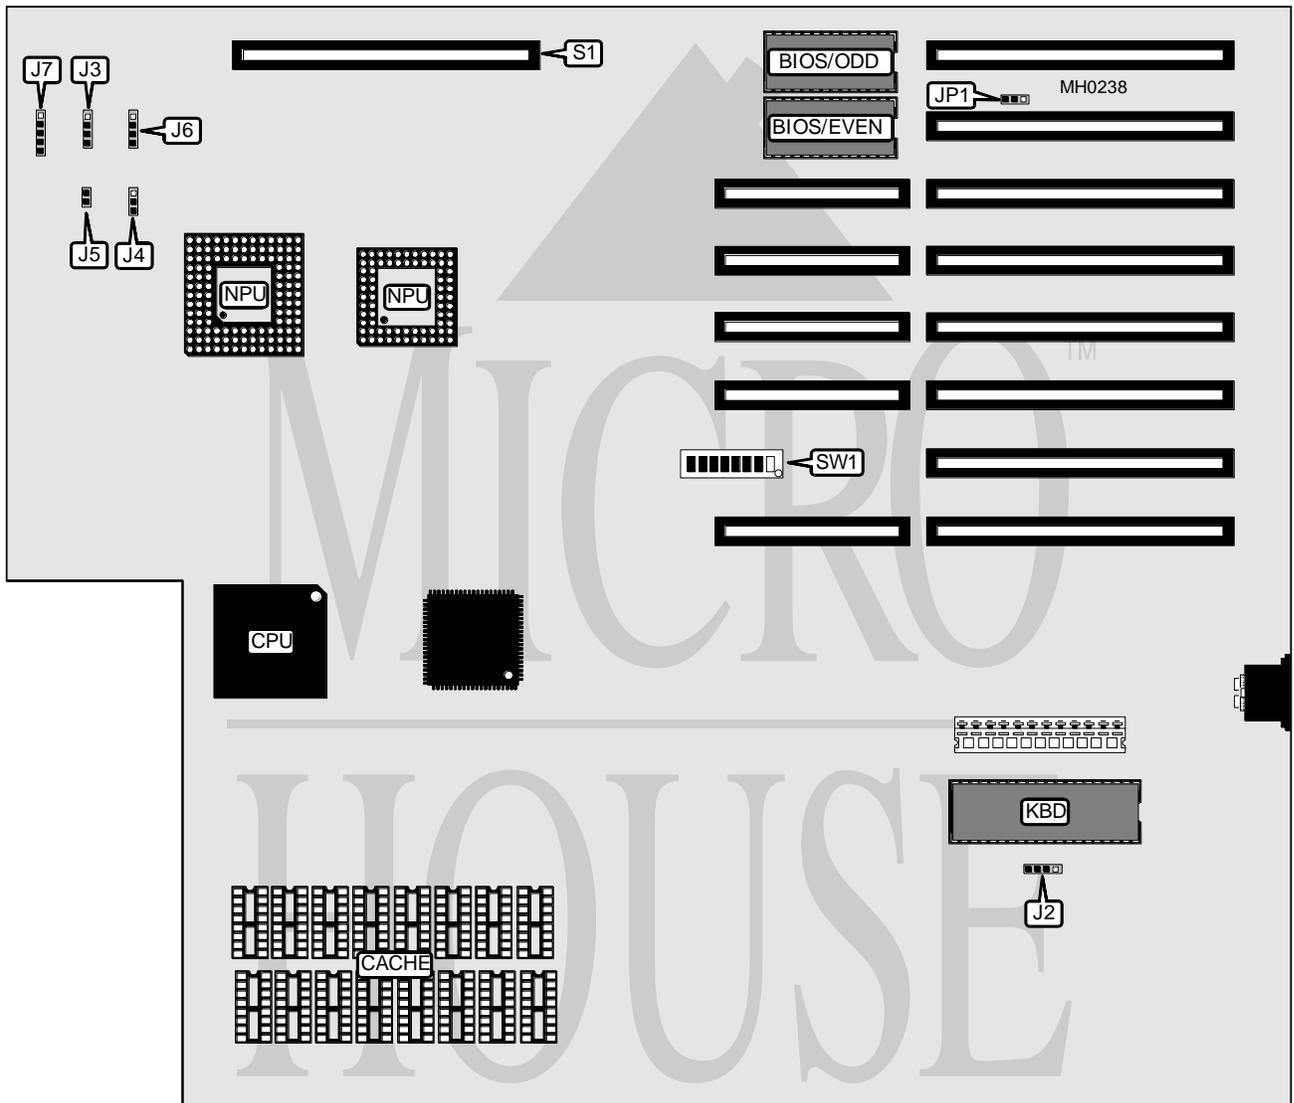


Continued on next page . . .

GCH SYSTEMS, INC.  
EASY DATA 386

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo LED	J6
Speaker	J3	Power LED & keylock	J7
Turbo switch	J4	32-bit external memory card	S1
Reset switch	J5		

USER CONFIGURABLE SETTINGS			
Function	Jumper/Switch	Position	
í Factory configured - do not alter	JP1	N/A	
í NPU enabled	SW1/1	On	
NPU disabled	SW1/1	Off	
í Factory configured - do not alter	SW1/2	Off	
í Factory configured - do not alter	SW1/3	Off	
í Factory configured - do not alter	SW1/4	Off	
í Monitor type select color	SW1/5	On	
Monitor type select monochrome	SW1/5	Off	
í Factory configured - do not alter	SW1/6	On	
í Factory configured - do not alter	SW1/7	On	
í Factory configured - do not alter	SW1/8	On	

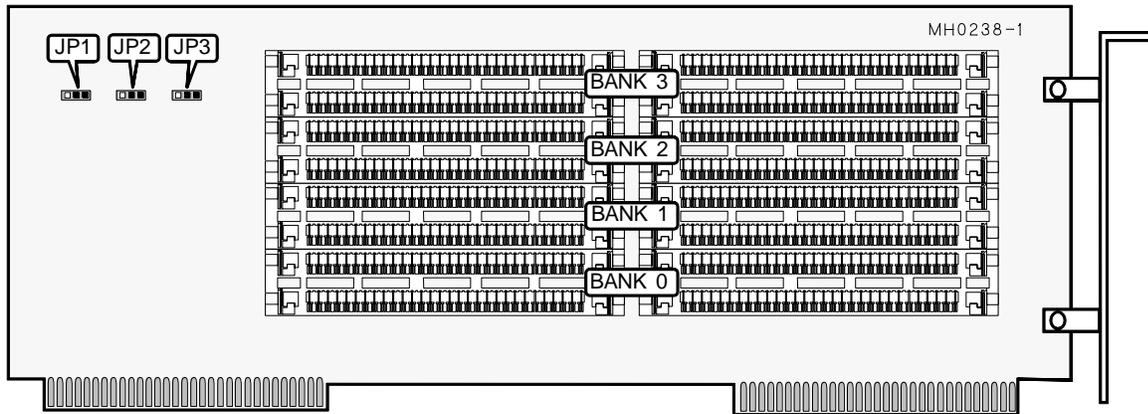

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	NONE
4MB	(4) 256K x 9			
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9			

Continued on next page ...

GCH SYSTEMS, INC.  
EASY DATA 386

... continued from previous page

DRAM JUMPER CONFIGURATION			
Size	JP1	JP2	JP3
1MB	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed
2MB	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed
3MB	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2 closed
4MB	pins 2 & 3 closed	pins 2 & 3 closed	pins 1 & 2 closed
4MB	pins 1 & 2 closed	pins 1 & 2 closed	pins 2 & 3 closed
8MB	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed
12MB	pins 1 & 2 closed	pins 2 & 3 closed	pins 2 & 3 closed
16MB	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed