


DTK COMPUTER, INC.

PPM - 1660C/2060C

Processor	80386SX
Processor Speed	16/20MHz
Chip Set	C & T
Max. Onboard DRAM	5MB
Cache	None
BIOS	AMI/DTK
Dimensions	333mm x 222mm
I/O Options	Floppy drive interface, IDE interface, parallel port, serial ports (2), PS/2 mouse interface
NPU Options	80387SX

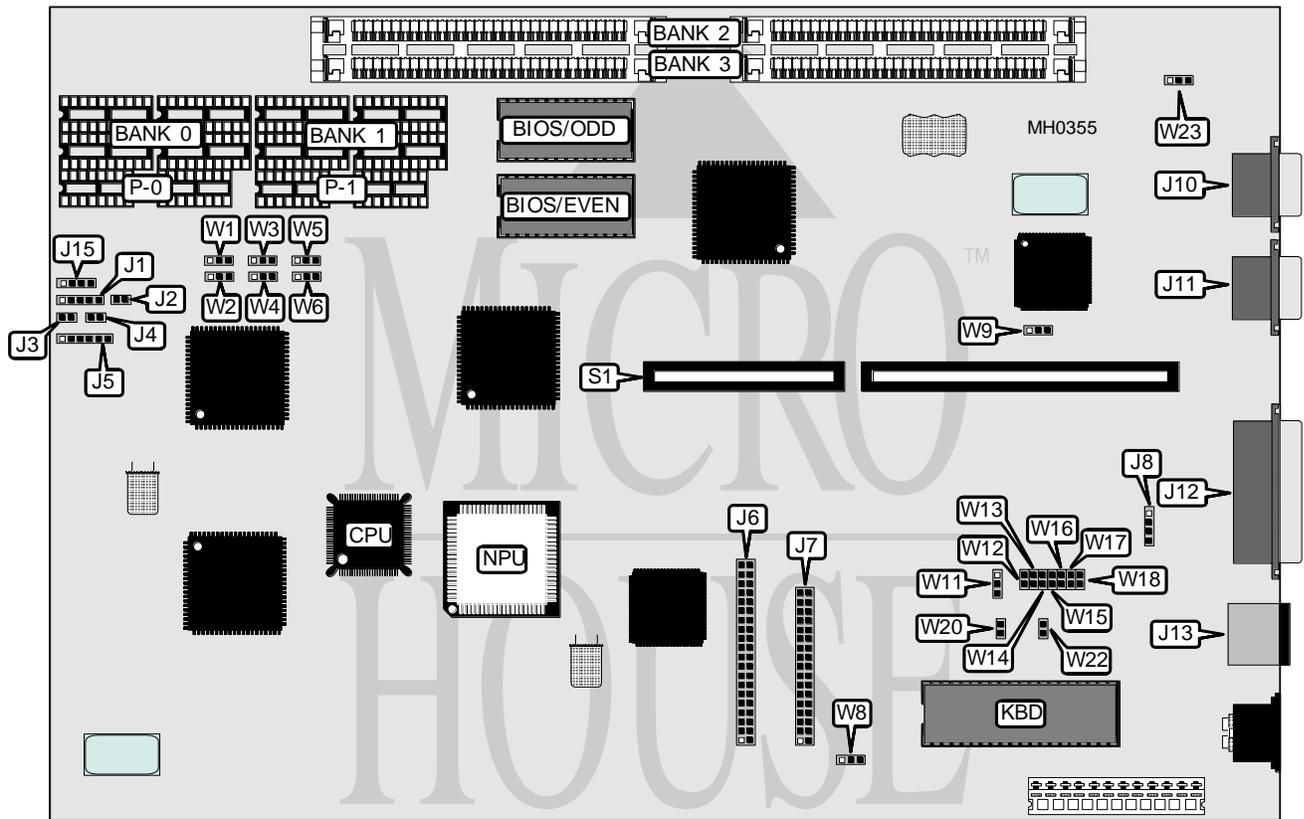

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	External battery	J8
Reset switch	J2	Serial port 1	J10
Turbo switch	J3	Serial port 2	J11
Turbo LED	J4	Parallel port	J12
Speed LED	J5	PS/2 mouse interface	J13
IDE interface	J6	IDE interface LED	J15
Floppy drive interface	J7	Riser card	S1

Continued on next page . . .

DTK COMPUTER, INC.
P K M - 2 0 6 0 C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Power good signal detect from power supply	W8	pins 2 & 3 closed
Power good signal detect from board	W8	pins 1 & 2 closed
í Parallel port select IRQ5	W9	pins 2 & 3 closed
Parallel port select IRQ7	W9	pins 1 & 2 closed
í NPU disabled	W11	pins 2 & 3 closed
NPU enabled	W11	pins 1 & 2 closed
í Floppy drive interface enabled	W14	Closed
Floppy drive interface disabled	W14	Open
í IDE interface disabled	W20	Open
IDE interface enabled	W20	Closed
í Monitor type select monochrome	W22	Open
Monitor type select color	W22	Closed
í Battery select internal	W23	pins 2 & 3 closed
Battery select external	W23	pins 1 & 2 closed

DRAM CONFIGURATION						
Size	Bank 0	P-0	Bank 1	P-1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(2) 256K x 9	NONE
640KB	(4) 44256	(2) 41256	NONE	NONE	NONE	(2) 64K x 9
640KB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 64K x 9
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 256K x 9
1.5MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 256K x 9	NONE
2MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 256K x 9	(2) 256K x 9
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
3MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9
5MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION						
Size	W1	W2	W3	W4	W5	W6
512KB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
512KB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
640KB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
640KB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
1MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
1MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
1.5MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
2MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
2MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
3MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
4MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
5MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.

DTK COMPUTER, INC.

PKM - 2060C

... continued from previous page

PARALLEL PORT CONFIGURATION		
Setting	W12	W13
LPT1	Closed	Closed
LPT2	Open	Open
Disabled	Open	Closed

SERIAL PORT 1 CONFIGURATION		
Setting	W15	W16
COM1 enabled	Closed	Closed
COM3 enabled	Open	Open
Disabled	Open	Closed

SERIAL PORT 2 CONFIGURATION		
Setting	W17	W18
COM2 enabled	Closed	Closed
COM4 enabled	Open	Open
Disabled	Open	Closed