


KOUWELL ELECTRONIC CORPORATION

KW - 316

Processor	80386DX
Processor Speed	25MHz
Chip Set	OPTI
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI/Award
Dimensions	331mm x 218mm
I/O Options	32-bit external memory card slot
NPU Options	80387/3167

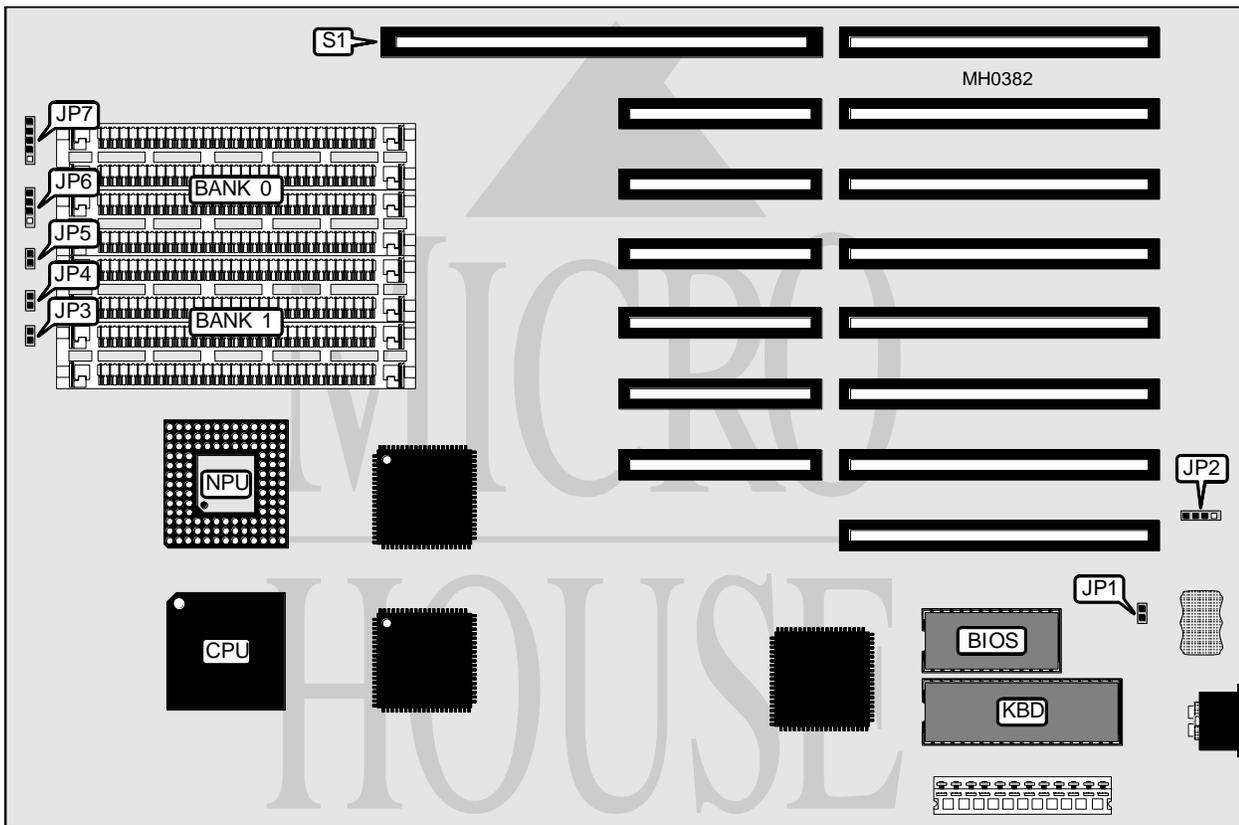

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP2	Speaker	JP6
Turbo switch	JP3	Power LED & keylock	JP7
Turbo LED	JP4	32-bit external memory card	S1
Reset switch	JP5		

Continued on next page . . .

KOUWELL ELECTRONIC CORPORATION

KW - 316

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	JP1	Open
Monitor type select color	JP1	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	NONE
4MB	(4) 256K x 9			
4MB	(4) 1M x 9	NONE	NONE	NONE
5MB	(4) 256K x 9	(4) 1M x 9	NONE	NONE
6MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	NONE
7MB	(4) 1M x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
9MB	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	NONE
10MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
13MB	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 1M x 9			

Note: Banks 2 and 3 are used when a 32-bit external memory card is installed at S1.