


UNIDENTIFIED 80386SX SCAMP

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	VLSI
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

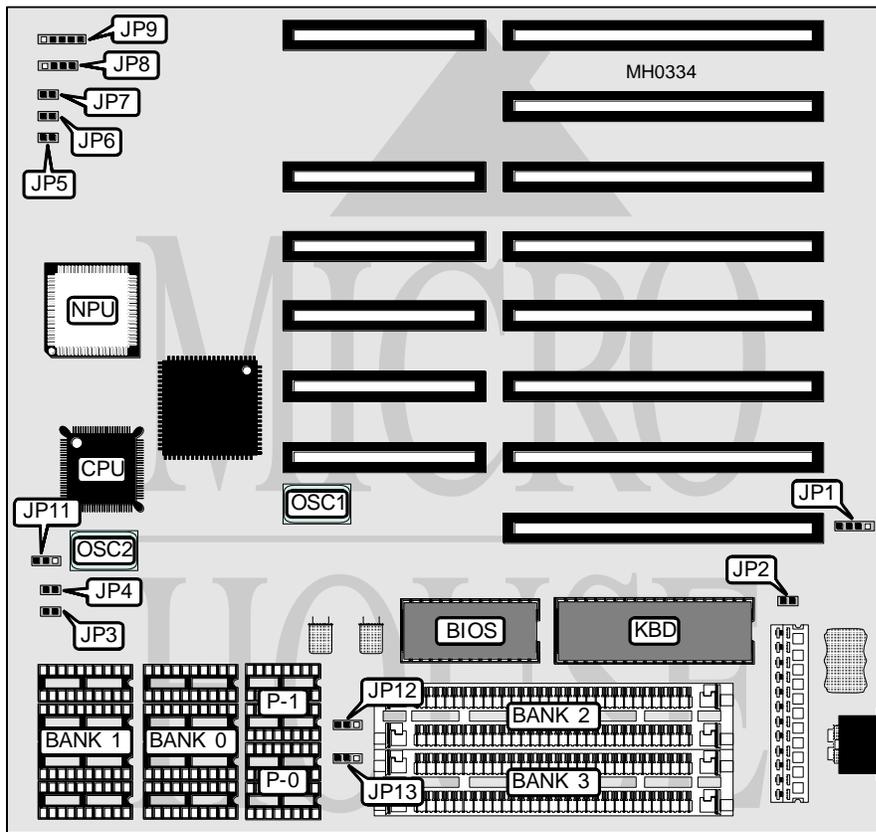

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP1	Turbo LED	JP7
Reset switch	JP5	Speaker	JP8
Turbo switch	JP6	Power LED & keylock	JP9

Continued on next page . . .

UNIDENTIFIED

80386SX SCAMP

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open
í Factory configured - do not alter	JP3	N/A
í Factory configured - do not alter	JP4	N/A
í NPU mode select synchronous with CPU	JP11	pins 2 & 3 closed
NPU mode select asynchronous with CPU	JP11	pins 1 & 2 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3	P-0	P-1
512KB	(4) 44256	NONE	NONE	NONE	(2) 41256	NONE
512KB	NONE	NONE	(2) 256K x 9	NONE	NONE	NONE
1MB	(4) 44256	(4) 44256	NONE	NONE	(2) 41256	(2) 41256
1MB	NONE	NONE	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(4) 44256	(4) 44256	(2) 256K x 9	NONE	(2) 41256	(2) 41256
2MB	NONE	NONE	(2) 1M x 9	NONE	NONE	NONE
2MB	(4) 44256	(4) 44256	(2) 256K x 9	(2) 256K x 9	(2) 41256	(2) 41256
3MB	(4) 44256	(4) 44256	(2) 256K x 9	NONE	(2) 41256	(2) 41256
4MB	NONE	NONE	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(4) 44256	(4) 44256	(2) 1M x 9	(2) 1M x 9	(2) 41256	(2) 41256
8MB	NONE	NONE	(2) 4M x 9	NONE	NONE	NONE
16MB	NONE	NONE	(2) 4M x 9	(2) 4M x 9	NONE	NONE

DRAM JUMPER CONFIGURATION

Size	JP12	JP13
512KB	pins 1 & 2 closed	pins 1 & 2 closed
512KB	pins 1 & 2 closed	pins 1 & 2 closed
1MB	pins 1 & 2 closed	pins 1 & 2 closed
1MB	pins 1 & 2 closed	pins 1 & 2 closed
1.5MB	pins 2 & 3 closed	pins 2 & 3 closed
2MB	pins 1 & 2 closed	pins 1 & 2 closed
2MB	pins 2 & 3 closed	pins 2 & 3 closed
3MB	pins 2 & 3 closed	pins 2 & 3 closed
4MB	pins 1 & 2 closed	pins 1 & 2 closed
5MB	pins 2 & 3 closed	pins 2 & 3 closed
8MB	pins 1 & 2 closed	pins 1 & 2 closed
16MB	pins 1 & 2 closed	pins 1 & 2 closed