


ARTEK COMPUTER SYSTEMS, INC.

SP/286

Processor 80286
Processor Speed 8/10/12MHz
Chip Set Unidentified
Max. Onboard DRAM 4MB
Cache None
BIOS AMI
Dimensions 330mm x 300mm
I/O Options Serial ports (2), parallel port
NPU Options 80287

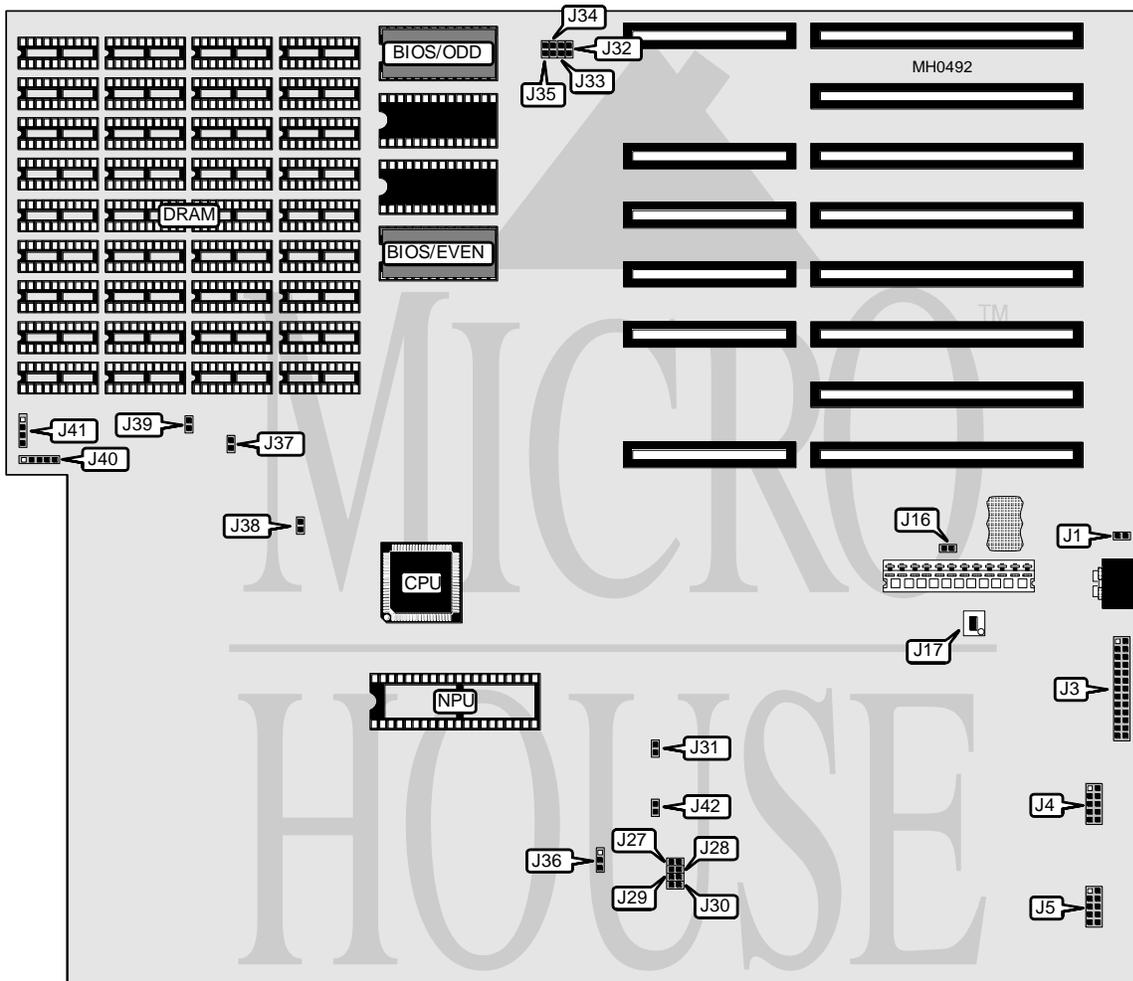

CONNECTIONS

Purpose	Location	Purpose	Location
Parallel port	J3	Turbo LED	J31
Serial port 1	J4	Power LED & keylock	J40
Serial port 2	J5	Speaker	J41
External battery	J15	Turbo switch	J42
Reset switch	J16		

Continued on next page . . .

ARTEK COMPUTER SYSTEMS, INC.

SP/286

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J1	Closed
Monitor type select monochrome	J1	Open
í Power good signal detect enabled	J17	Closed
Power good signal detect disabled	J17	Open
í Parallel port enabled	J27	Closed
Parallel port disabled	J27	Open
í Serial port (COM1) enabled	J28	Closed
Serial port (COM1) disabled	J28	Open
í Serial port (COM2) enabled	J29	Closed
Serial port (COM2) disabled	J29	Open
í Parallel port address select 378-37F (LPT1)	J27	Open
Parallel port address select 278-27F (LPT2)	J27	Closed
Note: All information regarding J17 is unverified.		

DRAM CONFIGURATION	
Size	Bank 0
1MB	(36) 41256
4MB	(36) 411000

DRAM SPEED CONFIGURATION		
Wait state	J37	J39
0	Closed	Closed
1	Open	Open

DRAM JUMPER CONFIGURATION	
Size	J38
1MB	Open
4MB	Closed

CPU SPEED CONFIGURATION	
Speed	J36
10MHz	pins 1 & 2 closed
12MHz	pins 2 & 3 closed

BIOS CONFIGURATION				
Size	J32	J33	J34	J35
2764	Open	Closed	Open	Closed
27128	Closed	Open	Closed	Open
27256	Closed	Open	Closed	Open