


UNIDENTIFIED

KMX-16/20 SCATSX

Processor	80386SX
Processor Speed	20/25MHz
Chip Set	C & T SCAT
Max. Onboard DRAM	16MB
Cache	None
BIOS	C & T
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80387SX

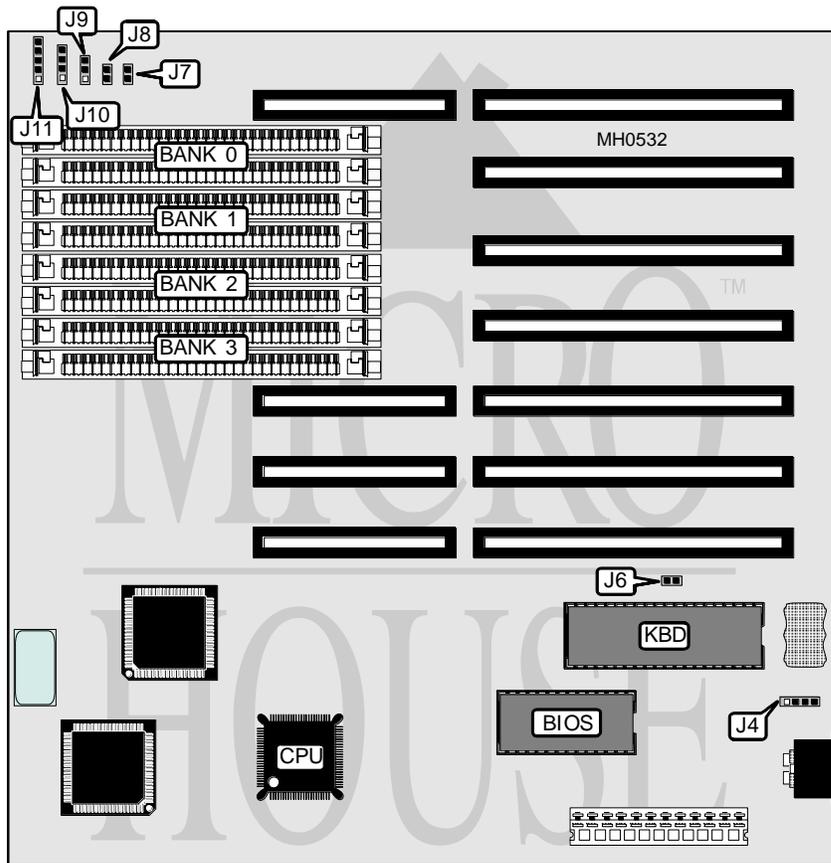

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Turbo switch	J9
Reset switch	J7	Speaker	J10
Turbo LED	J8	Power LED & keylock	J11

Continued on next page . . .

UNIDENTIFIED

KMX-16/20 SCATSX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J6	Closed
Monitor type select monochrome	J6	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 1M x 9	(2) 256K x 9	NONE	NONE
3MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
6.5MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9
8MB	(2) 1M x 9			
9MB	(2) 4M x 9	(2) 256K x 9	(2) 256K x 9	NONE
10MB	(2) 4M x 9	(2) 1M x 9	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE