


CACHE COMPUTERS, INC.
BAT-386 (MODEL 315)

Processor	80386DX
Processor Speed	25/33MHz
Chip Set	SIS
Max. Onboard DRAM	8MB
Cache	64KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card slot
NPU Options	80387/3167

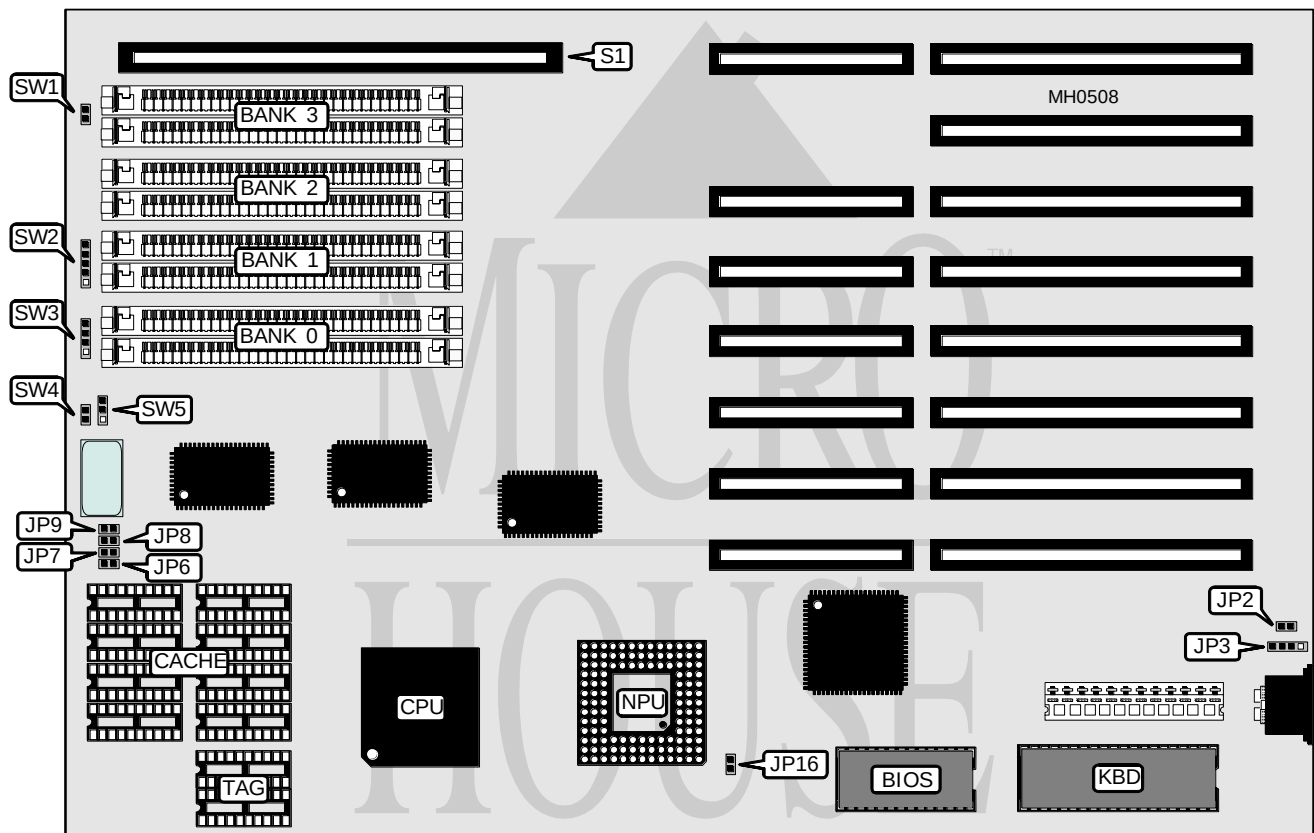

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP3	Turbo switch	SW4
Reset switch	SW1	Turbo LED	SW5
Power LED & keylock	SW2	32-bit external memory card	S1
Speaker	SW3		

Continued on next page . . .

CACHE COMPUTERS, INC.

BAT-386 (MODEL 315)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP2	Open
Monitor type select monochrome	JP2	Closed
í CMOS memory normal operation	JP16	Open
CMOS memory clear	JP16	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 1M x 9	(2) 256K x 9	NONE	NONE
3MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	NONE
3.5MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
6.5	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9

CACHE CONFIGURATION		
Size	Bank 0	TAG
64KB	(8) 64K x 1	(2) 64K x 1

CACHE JUMPER CONFIGURATION				
Size	JP6	JP7	JP8	JP9
0KB	Closed	Closed	Closed	Closed
64KB	Open	Open	Open	Open