


GOLDSTAR ELECTRONICS INTERNATIONAL, INC.

GS318

Processor	80386SX
Processor Speed	20MHz
Chip Set	C & T SCAT
Max. Onboard DRAM	8MB
Cache	None
BIOS	Phoenix
Dimensions	330mm x 218mm
I/O Options	PS/2 mouse port, parallel port, serial port, VGA video port, floppy drive interface, IDE interface
NPU Options	80387SX

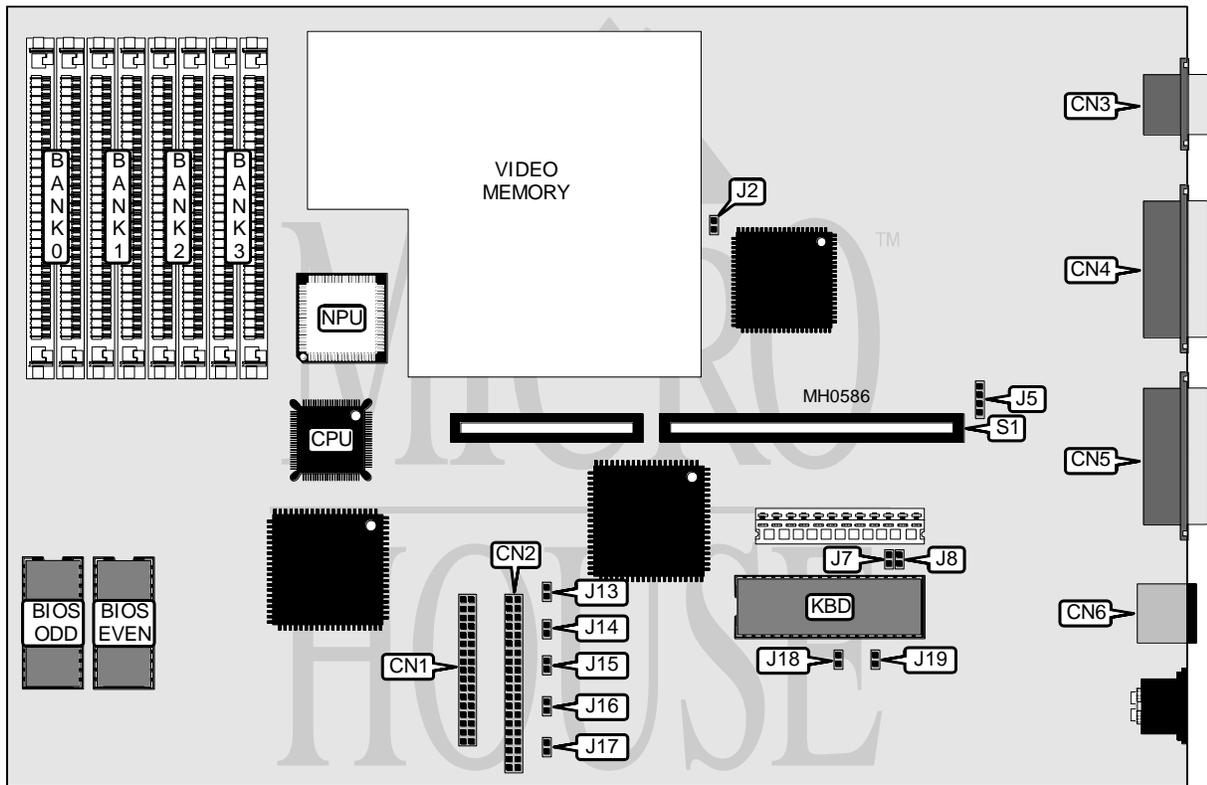

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J5	IDE interface	CN2
Speaker	J13 & J17	Video port	CN3
Keylock	J14	Serial port	CN4
Power LED	J15	Parallel port	CN5
IDE interface LED	J16	PS/2 mouse port	CN6
Floppy drive interface	CN1	Riser card	S1

Continued on next page . . .

GOLDSTAR ELECTRONICS INTERNATIONAL, INC.

GS318

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Video port enabled	J2	Closed
Video port disabled	J2	Open
í Factory configured - do not alter	J7	Open
í Factory configured - do not alter	J8	Open
í On board I/O options enabled	J18	Closed
On board I/O options disabled	J18	Open
í Monitor type select color	J19	Closed
Monitor type select monochrome	J19	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 256K x 9	(2) 1M x 9	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			