


# PRECISION AMERICA, INC.

## B A B Y - 3 8 6

**Processor** 80386DX  
**Processor Speed** 16/20/25MHz  
**Chip Set** C & T  
**Max. Onboard DRAM** 32MB  
**Cache** None  
**BIOS** AMI  
**Dimensions** 330mm x 218mm  
**I/O Options** 32-bit external memory card slot  
**NPU Options** 80287/80387/3167

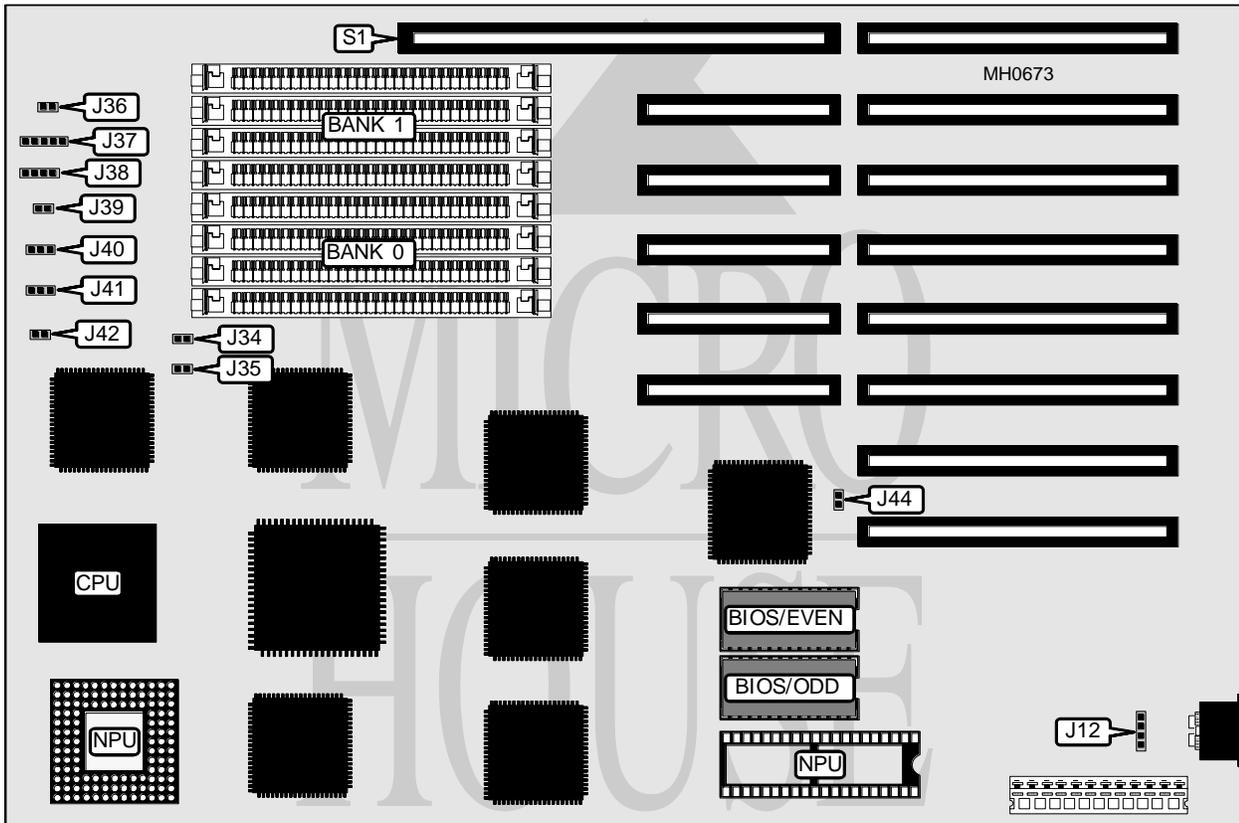

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J12	Turbo switch	J39
Reset switch	J34	Turbo LED	J42
Power LED & keylock	J37	32-bit external memory card	S1
Speaker	J38		

Continued on next page . . .

# PRECISION AMERICA, INC.

## B A B Y - 3 8 6

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU type select 80387 or 3167	J35	Closed
NPU type select 80287 or none	J35	Open
í Monitor type select color	J36	Closed
Monitor type select monochrome	J36	Open
í CPU speed select forced slow	J39	Closed
CPU speed select switchable at keyboard	J39	Open
í NPU enabled (80387 or 3167)	J40	pins 1 & 2 closed
NPU enabled (80287)	J40	pins 2 & 3 closed
í NPU mode select synchronous with CPU	J41	pins 1 & 2 closed
NPU mode select asynchronous with CPU	J41	pins 2 & 3 closed
í CMOS memory normal operation	J44	Open
CMOS memory clear	J44	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1 M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9