


UNIDENTIFIED K 3 8 6 S X

Processor	80386SX
Processor Speed	16/20MHz
Chip Set	C & T NEAT
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI/Phoenix
Dimensions	330mm x 218mm
I/O Options	Parallel port, serial ports (2), floppy drive interface, IDE interface
NPU Options	80387SX

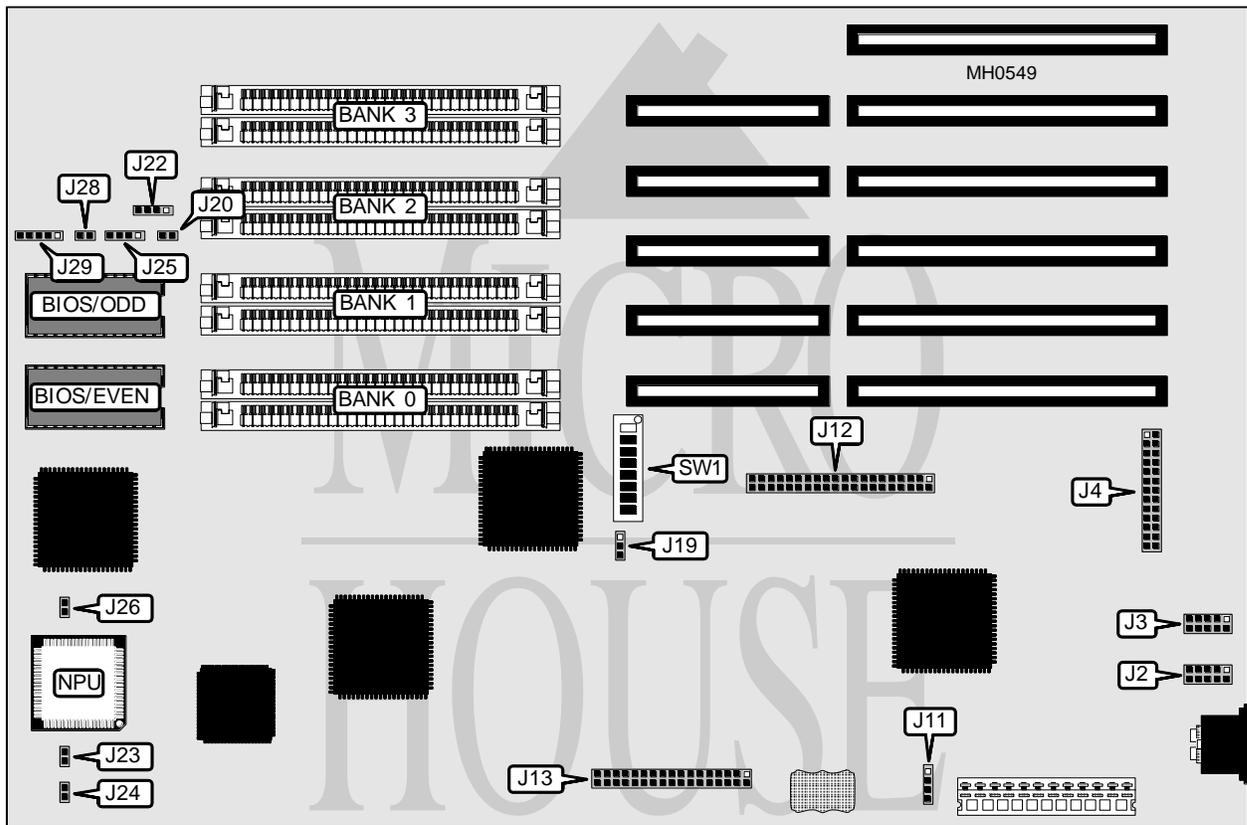

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 2	J2	Turbo LED	J20
Serial port 1	J3	IDE interface LED	J22
Parallel port	J4	Turbo switch	J23
External battery	J11	Speaker	J25
IDE interface	J12	Reset switch	J28
Floppy drive interface	J13	Power LED & keylock	J29

Continued on next page . . .

UNIDENTIFIED

K386SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í IRQ14 busy when IDE interface is busy	J19	pins 1 & 2 closed
IRQ14 clear when IDE interface is busy	J19	pins 2 & 3 closed
í Factory configured - do not alter	J24	open
í NPU disabled	J26	closed
NPU enabled	J26	open
í Floppy drive interface enabled	SW1/1	Off
Floppy drive interface disabled	SW1/1	On
í Floppy drive interface select primary address	SW1/2	Off
Floppy drive interface select secondary address	SW1/2	On
í IDE interface select primary address	SW1/3	Off
IDE interface select secondary address	SW1/3	On
í I/O channel ready signal (IOCHRDY) disconnected	SW1/4	Off
I/O channel ready signal (IOCHRDY) connected	SW1/4	On
í IDE interface enabled	SW1/5	On
IDE interface disabled	SW1/	Off
í Factory configured - do not alter	SW1/6	On
í CMOS memory normal operation	SW1/7	On
CMOS memory clear	SW1/7	Off
í Monitor type select color	SW1/8	On
Monitor type select monochrome	SW1/8	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			