


# MULTI MICRO SYSTEMS, INC.

## N W 3 8 6 S X C

**Processor** 80386SX  
**Processor Speed** 16/20/25MHz  
**Chip Set** C & T  
**Max. Onboard DRAM** 16MB  
**Cache** None  
**BIOS** C & T  
**Dimensions** 334mm x 122mm  
**I/O Options** Mouse port, parallel port, serial interface, floppy drive interface, IDE interface  
**NPU Options** 80387SX

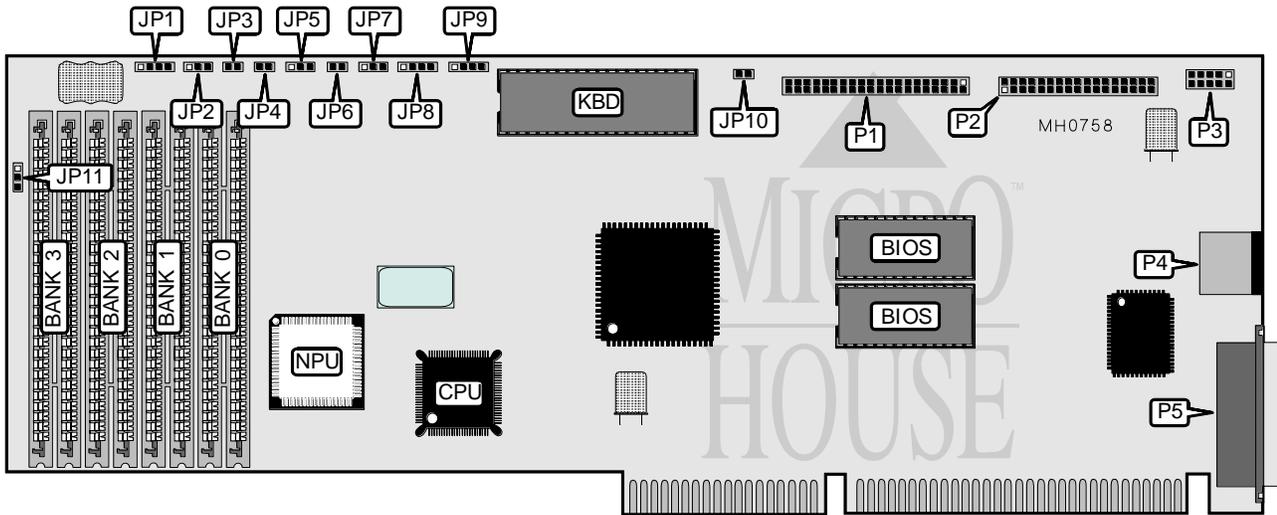

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface LED	JP1	External battery	JP9
Turbo LED	JP2	Keyboard	JP10
Reset switch	JP3	IDE interface	P1
Turbo switch	JP4	Floppy drive interface	P2
Keyboard turbo LED	JP5	Serial interface	P3
Speaker	JP6	Mouse port	P4
Power LED & keylock	JP8	Parallel port	P5

*Continued on next page . . .*

# MULTI MICRO SYSTEMS, INC.

## N W 3 8 6 S X C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP7	Closed
Monitor type select monochrome	JP7	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 258K x 9	NONE	NONE	NONE
1MB	(2) 258K x 9	(2) 258K x 9	NONE	NONE
1.5MB	(2) 258K x 9	(2) 258K x 9	(2) 258K x 9	NONE
2MB	(2) 258K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 258K x 9	(2) 1M x 9	NONE	NONE
3MB	(2) 258K x 9	(2) 258K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 258K x 9	(2) 1M x 9	(2) 1M x 9	NONE
5MB	(2) 258K x 9	(2) 258K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
6.5MB	(2) 258K x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 1M x 9			
9MB	(2) 258K x 9	(2) 258K x 9	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE

DRAM JUMPER CONFIGURATION	
Size	JP11
512KB	pins 2 & 3 closed
1MB	pins 2 & 3 closed
1.5MB	pins 2 & 3 closed
2MB	pins 2 & 3 closed
2MB	pins 2 & 3 closed
2.5MB	pins 2 & 3 closed
3MB	pins 2 & 3 closed
4MB	pins 2 & 3 closed
4.5MB	pins 2 & 3 closed
5MB	pins 2 & 3 closed
6MB	pins 2 & 3 closed
6.5MB	pins 2 & 3 closed
8MB	pins 2 & 3 closed
9MB	pins 1 & 2 closed
10MB	pins 1 & 2 closed
16MB	pins 1 & 2 closed