


EVEREX SYSTEMS, INC.
STEP 486E 8 SLOT (EV-1899)

Processor	80486DX
Processor Speed	25/33MHz
Chip Set	Everex
Max. Onboard DRAM	64MB (on external memory board)
Cache	256KB
BIOS	Everex
Dimensions	355mm x 250mm
I/O Options	32-bit external memory card slot
NPU Options	4167

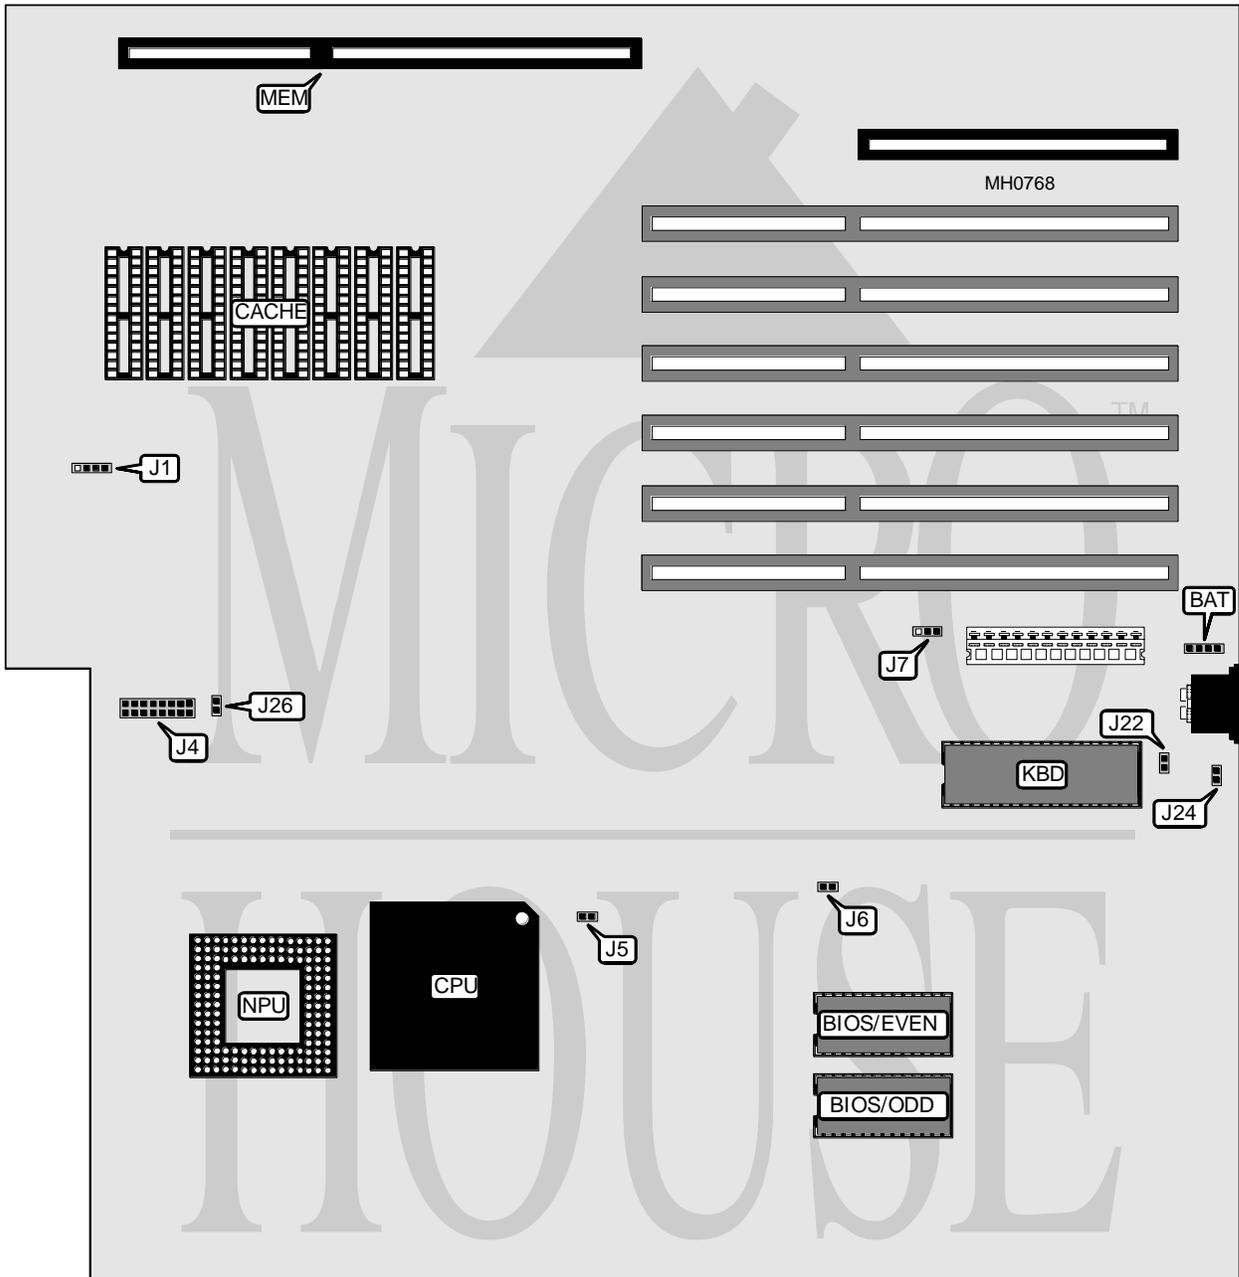

Continued on next page . . .

EVEREX SYSTEMS, INC.


STEP 486 E 8 SLOT (EV-1899)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	BAT	Front panel LED	J4
Speaker	J1	External memory card slot	MEM

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Bus speed select SYSCLK/3	J5	Closed
Bus speed select SYSCLK/4	J5	Open
í EEPROM select 32K x 8 chip	J6	Open
EEPROM select 64K x 8 chip	J6	Closed
í Factory configured - do not alter	J7	Open
í CMOS password check enabled	J22	Closed
CMOS password check disabled	J22	Open
í EISA setup check enabled	J24	Closed
EISA setup check disabled	J24	Open
í Factory configured - do not alter	J26	Open

CACHE CONFIGURATION	
Size	Bank 0
256KB	(8) 256K x 1

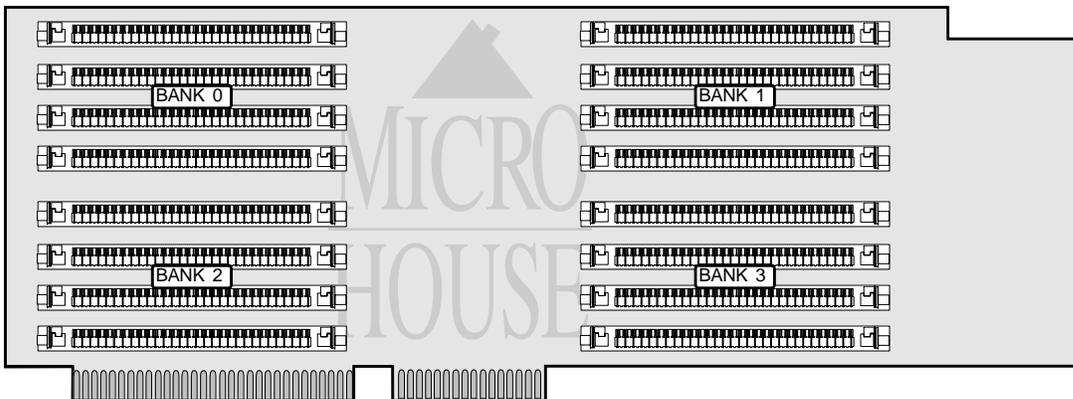

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(4) 256K x 9			
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
10MB	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9	(4) 256K x 9
16MB	(4) 1M x 9			
16MB	(4) 4M x 9	NONE	NONE	NONE
32MB	(4) 4M x 9	(4) 4M x 9	NONE	NONE
34MB	(4) 4M x 9	(4) 4M x 9	(4) 256K x 9	(4) 256K x 9
40MB	(4) 4M x 9	(4) 4M x 9	(4) 1M x 9	(4) 1M x 9
64MB	(4) 4M x 9			

