


# UNIDENTIFIED

## VLSI 80386SX

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20/25MHz
<b>Chip Set</b>	VLSI
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

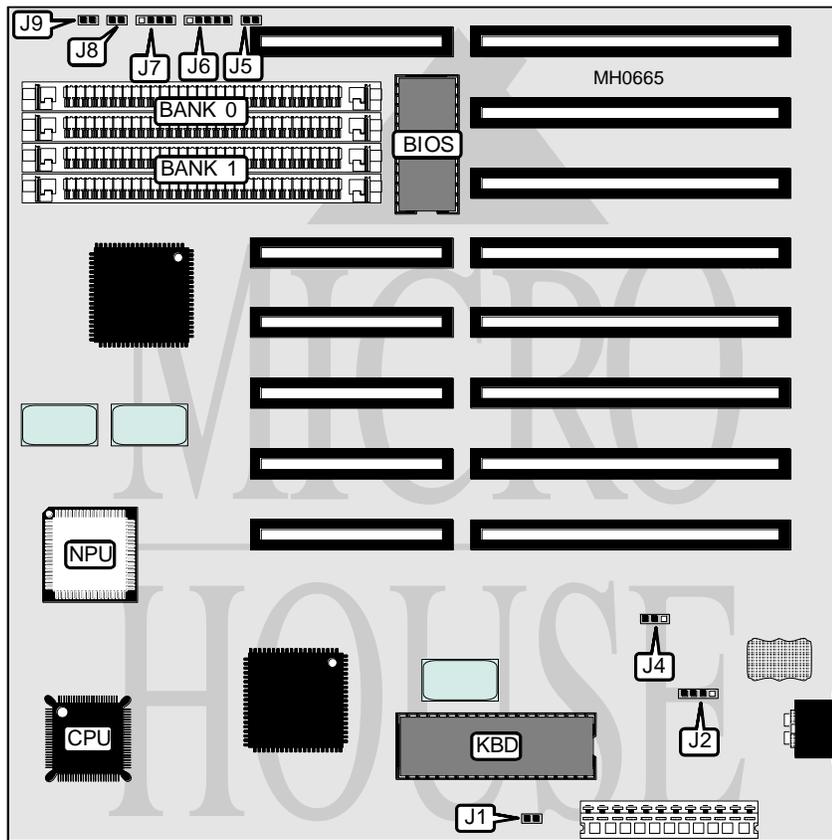

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Speaker	J7
Turbo switch	J5	Reset switch	J8
Power LED & keylock	J6	Turbo LED	J9

Continued on next page . . .

# UNIDENTIFIED

## VLSI 80386SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU speed select forced slow	J5	Closed
CPU speed select switchable at keyboard	J5	Open
í Monitor type select color	J1	Closed
Monitor type select monochrome	J1	Open
í Battery type select internal	J4	pins 2 & 3 closed
Battery type select external	J4	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9