


# DTK COMPUTER, INC.

## PIM-TB08-Z

<b>Processor</b>	8088
<b>Processor Speed</b>	8MHz
<b>Chip Set</b>	None
<b>Max. Onboard DRAM</b>	640KB
<b>Cache</b>	None
<b>BIOS</b>	DTK
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

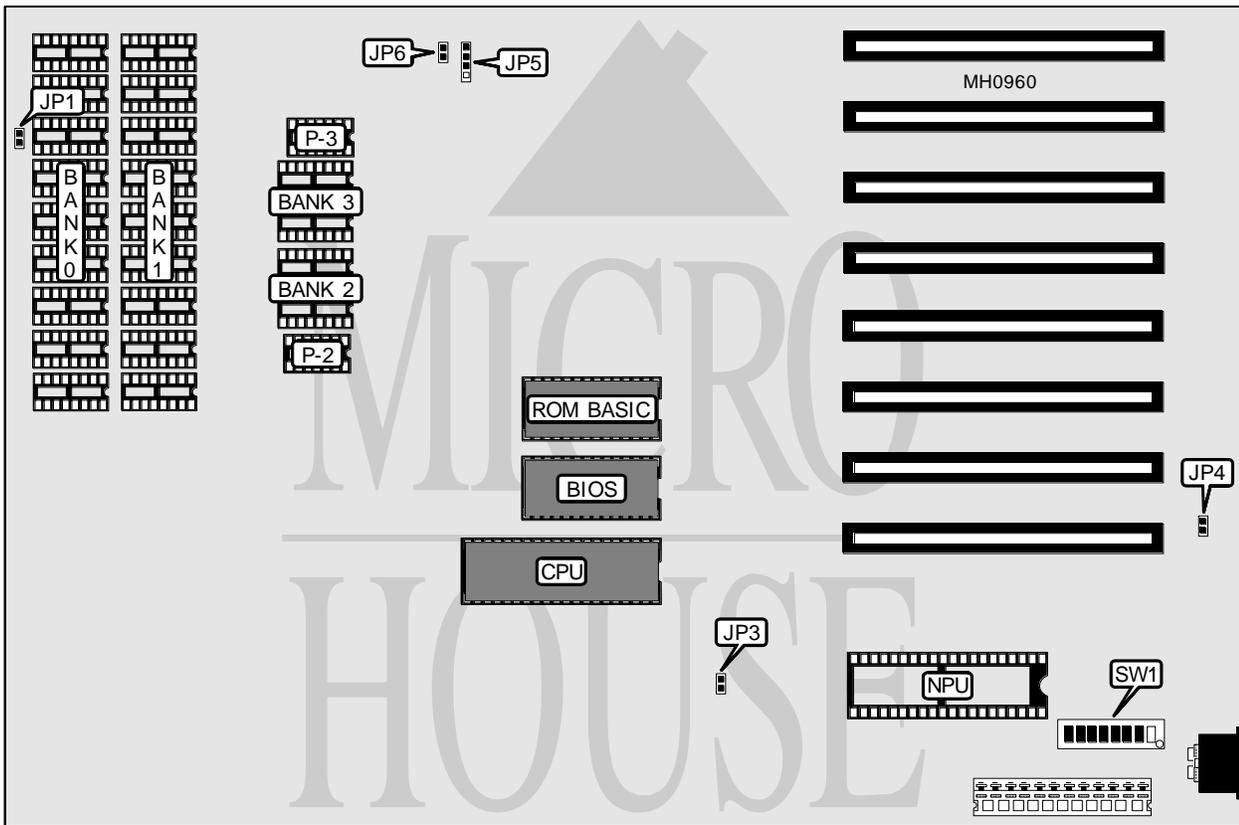

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	JP1	Turbo LED	JP5 pins 1 & 2
Keylock	JP3	Power LED	JP5 pins 3 & 4
Reset switch	JP4	Turbo switch	JP6

Continued on next page . . .

**DTK COMPUTER, INC.**  
**P I M - T B 0 8 - Z**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Factory configured - do not alter	SW1/1	Off
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off
í Factory configured - do not alter	SW1/3	N/A
í Factory configured - do not alter	SW1/4	N/A

DRAM CONFIGURATION						
Size	Bank 0	Bank 1	Bank 2	Parity (P-2)	Bank 3	Parity (P-3)
256KB	(9) 41256	NONE	NONE	NONE	NONE	NONE
512KB	(9) 41256	(9) 41256	NONE	NONE	NONE	NONE
576KB	(9) 41256	(9) 41256	(2) 4464	(1) 4164	NONE	NONE
640KB	(9) 41256	(9) 41256	(2) 4464	(1) 4164	(2) 4464	(1) 4164

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off

MONITOR CONFIGURATION		
Type	SW1/5	SW1/6
EGA	On	On
CGA (40 x 20)	Off	On
CGA (80 x 25)	On	Off
Monochrome	Off	Off