


TOP MICROSYSTEMS, INC.

286 MODEL-1007-200, VER 1.25

Processor	80286
Processor Speed	12/16/20MHz
Chip Set	C & T
Max. Onboard DRAM	1MB
Cache	None
BIOS	Phoenix
Dimensions	330mm x 218mm
I/O Options	16-bit external memory card slot
NPU Options	80287

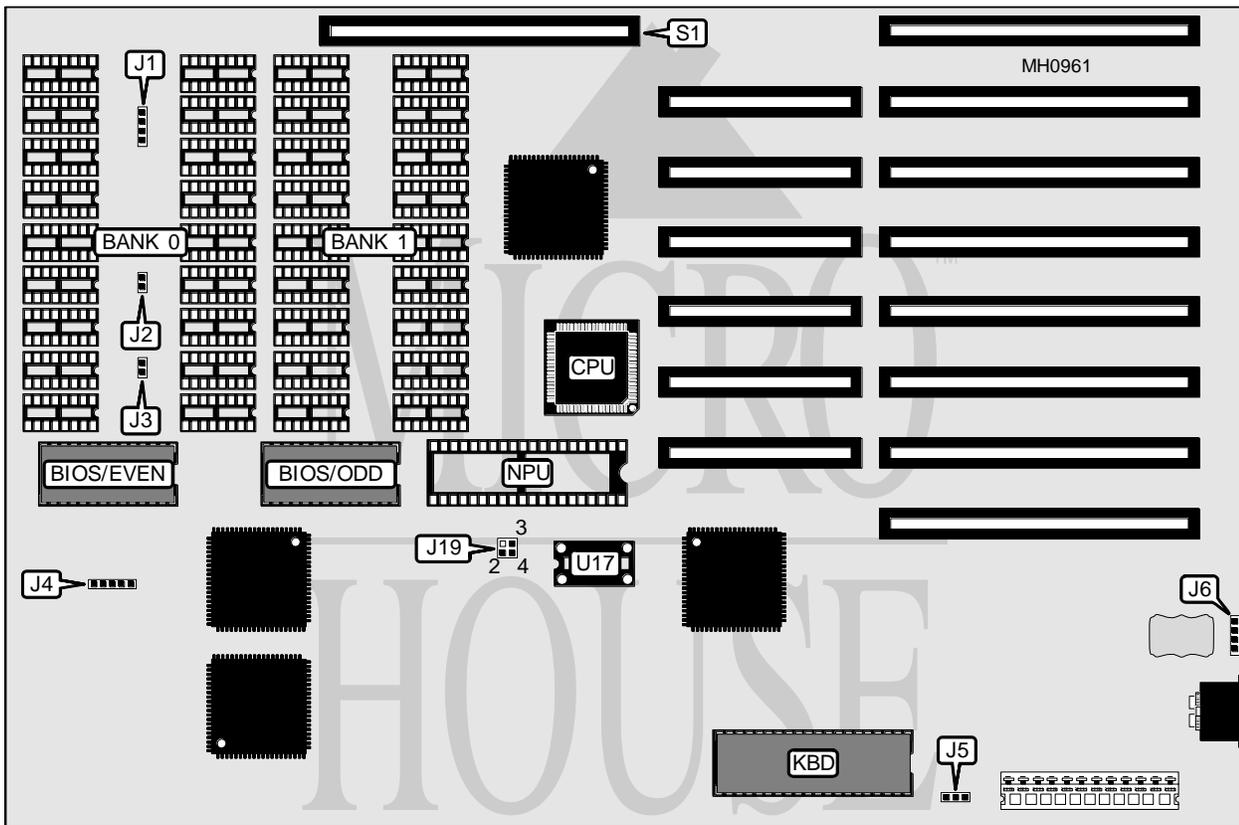

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Power LED & keylock	J4
Reset switch	J2	External battery	J6
Turbo LED	J3	16-bit external memory card	S1

Continued on next page . . .

TOP MICROSYSTEMS, INC.
286 MODEL-1007-200, VER 1.25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J5	pins 2 & 3 closed
Monitor type select monochrome	J5	pins 1 & 2 closed
í NPU is synchronous with CPU	J19	pins 3 & 4 closed
NPU is synchronous with oscillator installed at U17	J19	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	NONE
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256