


DYNA MICRO, INC.

MBA-386A-33,40/64

Processor	80386DX
Processor Speed	33/40MHz
Chip Set	Addonics
Max. Onboard DRAM	32MB
Cache	64KB
BIOS	Award
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card slot
NPU Options	80387/3167

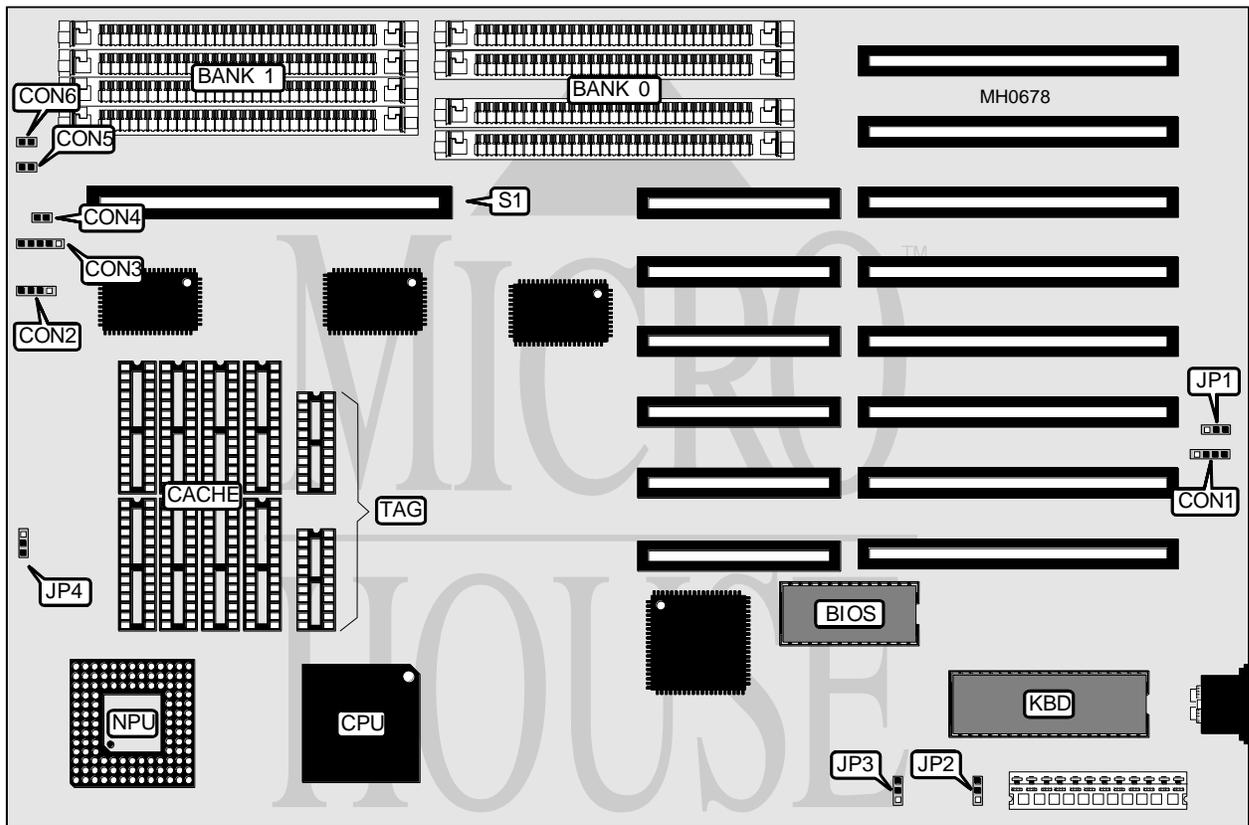

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	CON1	Turbo switch	CON5
Speaker	CON2	Reset switch	CON6
Power LED & keylock	CON3	32-bit external memory card	S1
Turbo LED	CON4		

Continued on next page . . .

DYNA MICRO, INC.

MBA-386A-33,40/64

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í External battery enabled	JP1	pins 1 & 2 closed
External battery disabled (clear CMOS memory)	JP1	Open
í Monitor type select monochrome	JP2	pins 1 & 2 closed
Monitor type select color	JP2	pins 2 & 3 closed
í Power good signal detect from power supply	JP3	pins 2 & 3 closed
Power good signal detect from board	JP3	pins 1 & 2 closed
í NPU mode select asynchronous with CPU	JP4	pins 1 & 2 closed
NPU mode select synchronous with CPU	JP4	pins 2 & 3 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION

Size	Bank 0	TAG
64KB	(8) 8K x 8	(2) 16K x 4