


HYUNDAI ELECTRONICS, INC.

SUPER 386SE

Processor	80386SX
Processor Speed	16MHz
Chip Set	Headland
Max. Onboard DRAM	8MB
Cache	None
BIOS	Phoenix
Dimensions	355mm x 304mm
I/O Options	Serial ports (2), parallel port, floppy drive interface, IDE interface
NPU Options	80387SX

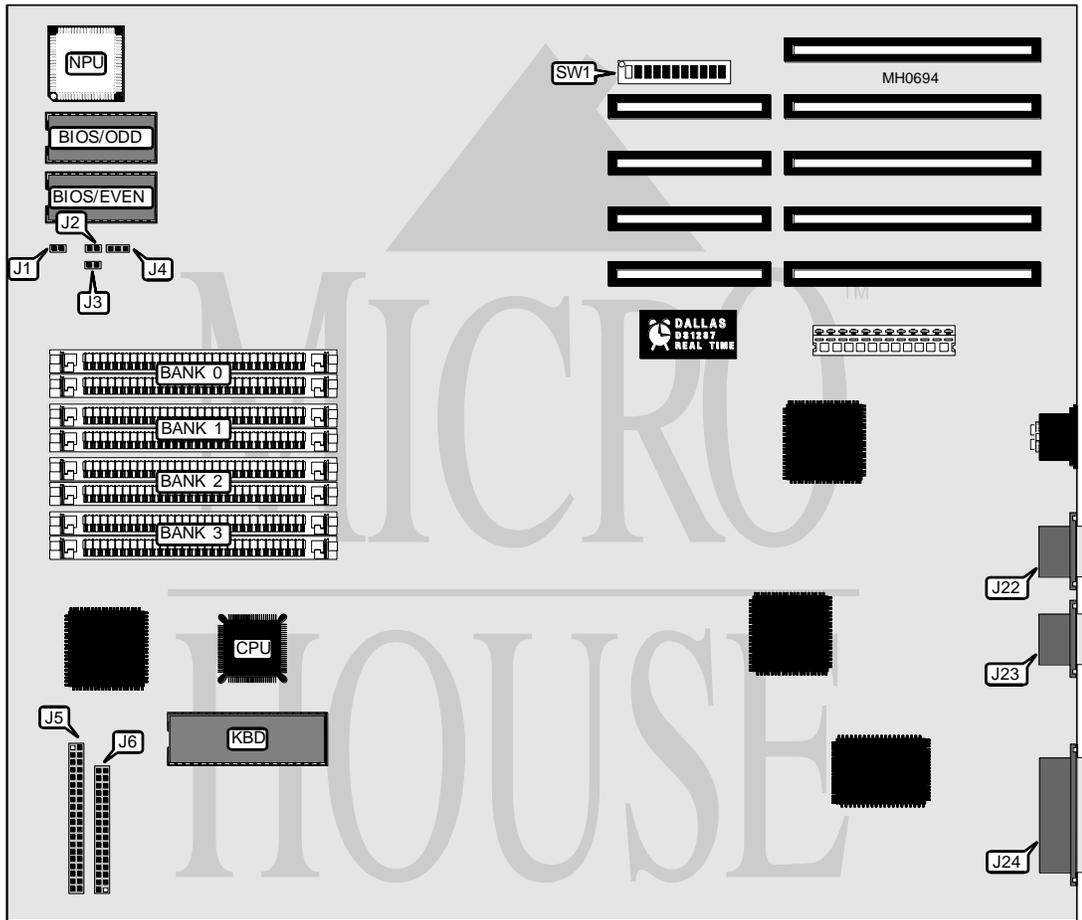

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J1	Floppy drive interface	J6
IDE interface LED	J2	Serial port	J22
Speaker	J3	Serial port	J23
Turbo LED	J4	Parallel port	J24
IDE interface	J5		

Continued on next page . . .

HYUNDAI ELECTRONICS, INC.

SUPER 386SE

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Bus speed select 8MHz	SW1/1	On
Bus speed select 16MHz	SW1/1	Off
í NPU disabled	SW1/2	Off
NPU enabled	SW1/2	On
í Monitor type select monochrome	SW1/3	Off
Monitor type select color	SW1/3	On
í Parallel port enabled	SW1/7	On
Parallel port disabled	SW1/7	Off
í Serial port 2 port enabled at COM2	SW1/8	On
Serial port 2 port disabled	SW1/8	Off
í Serial port 1 port enabled at COM1	SW1/9	On
Serial port 1 port disabled	SW1/9	Off
í IDE interface enabled	SW1/10	Off
IDE interface disabled	SW1/10	On
í Floppy drive interface enabled	SW1/11	Off
Floppy drive interface disabled	SW1/11	On

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9			
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			

PARALLEL PORT CONFIGURATION			
Setting	SW1/4	SW1/5	SW1/6
LPT1/IRQ7	On	Off	Off
LPT2/IRQ5	Off	On	On