


TOP MICROSYSTEMS, INC.

286 MODEL-1010-200, VER 1.25

Processor	80286
Processor Speed	12/16/20MHz
Chip Set	C & T
Max. Onboard DRAM	2MB
Cache	None
BIOS	Phoenix
Dimensions	330mm x 218mm
I/O Options	16-bit external memory card slot
NPU Options	80287

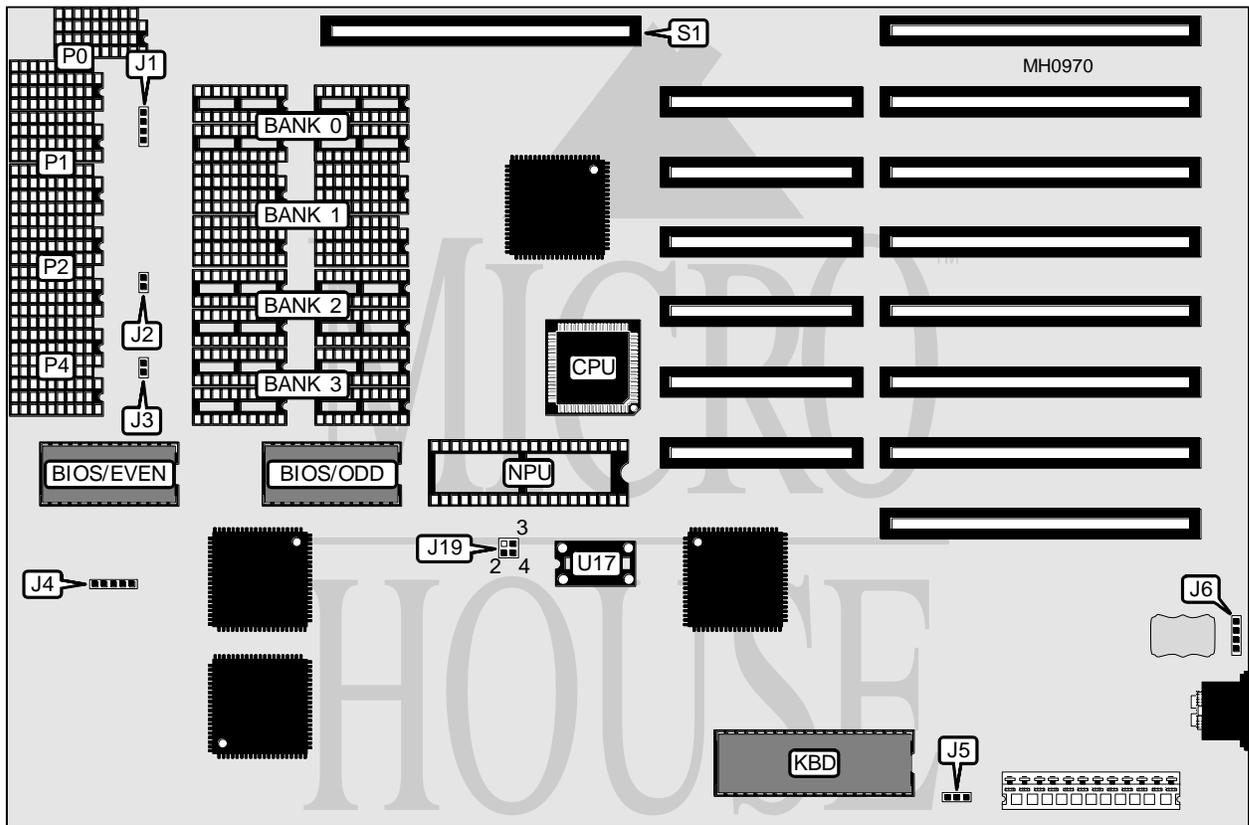

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Power LED & keylock	J4
Reset switch	J2	External battery	J6
Turbo LED	J3	16-bit external memory card	S1

Continued on next page . . .

TOP MICROSYSTEMS, INC.
286 MODEL-1010-200, VER 1.25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J5	pins 2 & 3 closed
Monitor type select monochrome	J5	pins 1 & 2 closed
í NPU is synchronous with CPU	J19	pins 3 & 4 closed
NPU is synchronous with oscillator installed at U17	J19	pins 1 & 2 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(4) 44256	NONE	NONE	NONE
640KB	(4) 44256	(4) 4464	NONE	NONE
1MB	(4) 44256	(4) 44256	NONE	NONE
2MB	(4) 44256	(4) 44256	(4) 44256	(4) 44256

DRAM PARITY CONFIGURATION				
Size	P 0	P 1	P 2	P 3
512KB	(2) 41256	NONE	NONE	NONE
640KB	(2) 41256	(2) 41256	(2) 4164	NONE
1MB	(2) 41256	(2) 41256	NONE	NONE
2MB	(2) 41256	(2) 41256	(2) 41256	(2) 41256