


# UNIDENTIFIED OPTI-386

<b>Processor</b>	80386DX
<b>Processor Speed</b>	25/33MHz
<b>Chip Set</b>	OPTI
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	64KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80387/3167

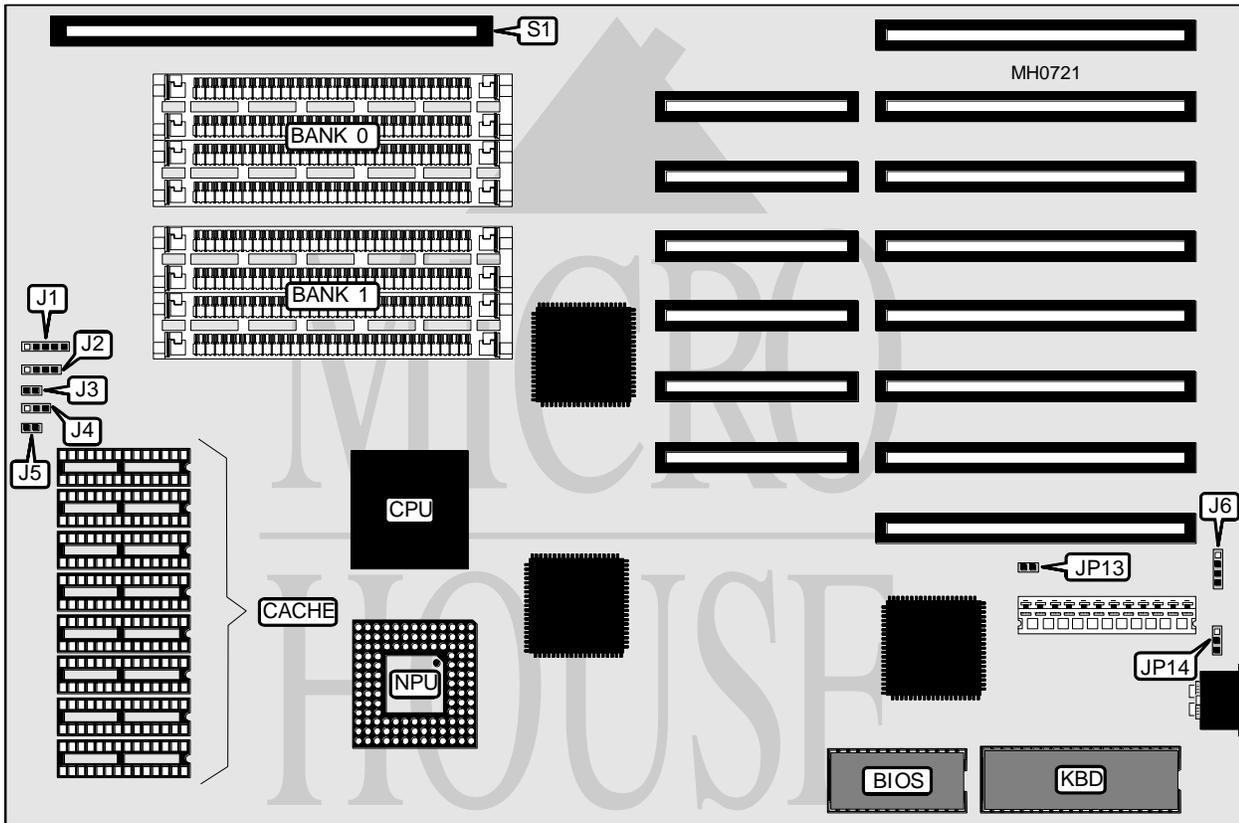

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	Turbo LED	J5
Speaker	J2	External battery	J6
Reset switch	J3	32-bit external memory card	S1
Turbo switch	J4		

Continued on next page . . .

# UNIDENTIFIED

## OPTI-386

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU speed select fast	J4	pins 1 & 2 closed
CPU speed select slow	J4	pins 1 & 2 open
í Monitor type select color	JP13	Closed
Monitor type select monochrome	JP13	Open
í Power good signal detect from power supply	JP14	pins 2 & 3 closed
Power good signal detect from board	JP14	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9