


WYSE TECHNOLOGY, INC.

WYSE PC 286 MODEL 2012I

Processor 80286
Processor Speed 12MHz
Chip Set WYSE
Max. Onboard DRAM 4MB
Cache None
BIOS WYSE
Dimensions 330mm x 218mm
I/O Options None
NPU Options 80287

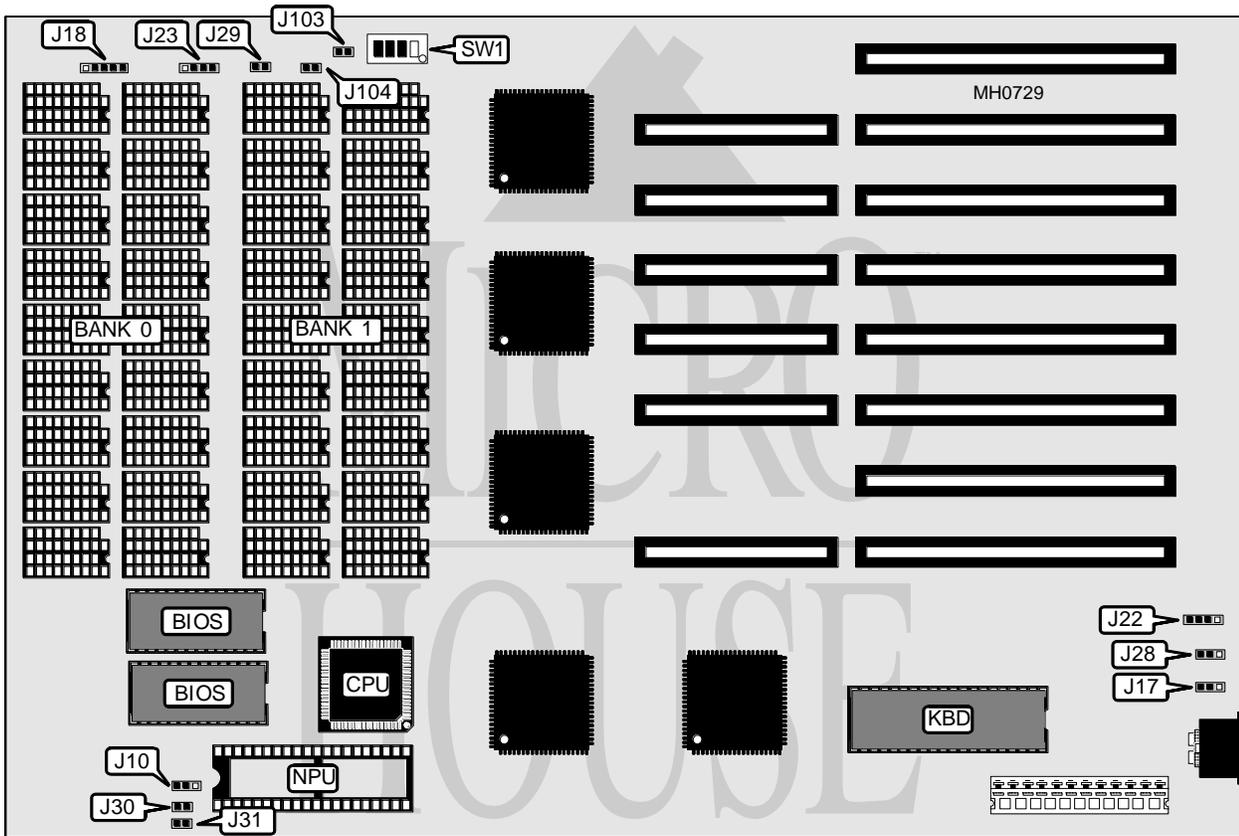

| CONNECTIONS | | | |
|---------------------|----------|--------------|----------|
| Purpose | Location | Purpose | Location |
| Power LED & keylock | J18 | Reset switch | J29 |
| External battery | J22 | Turbo LED | J103 |
| Speaker | J23 | Turbo switch | J104 |

Continued on next page . . .

WYSE TECHNOLOGY, INC.

WYSE PC 286 MODEL 20121

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|--|---------------|-------------------|
| Function | Jumper/Switch | Position |
| í DRAM speed select 120ns | J10 | pins 2 & 3 closed |
| DRAM speed select 80ns | J10 | pins 1 & 2 closed |
| í Power good signal detect from power supply | J17 | pins 1 & 2 closed |
| Power good signal detect from board | J17 | pins 2 & 3 closed |
| í Battery select internal | J28 | pins 1 & 2 closed |
| Battery select external | J28 | pins 2 & 3 closed |
| í Timing mode select normal | J30 | Open |
| Timing mode select fast ALE | J30 | Closed |
| í DRAM wait state select 1 | J31 | Open |
| DRAM wait states select 0 | J31 | Closed |
| í Monitor type select color | SW1/4 | On |
| Monitor type select monochrome | SW1/4 | Off |

| DRAM CONFIGURATION | | |
|--------------------|-------------|-------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (18) 41256 | (18) 41256 |
| 2MB | (18) 411000 | NONE |
| 4MB | (18) 411000 | (18) 411000 |

| DRAM SWITCH CONFIGURATION | | | |
|---------------------------|-------|-------|-------|
| Size | SW1/1 | SW1/2 | SW1/3 |
| 1MB | On | Off | On |
| 2MB | Off | Off | On |
| 4MB | On | On | Off |