


# NCR CORPORATION

## CLASS 3210/3215

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20MHz
<b>Chip Set</b>	SMD
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	NCR
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, serial ports (2), VGA port
<b>NPU Options</b>	80387SX

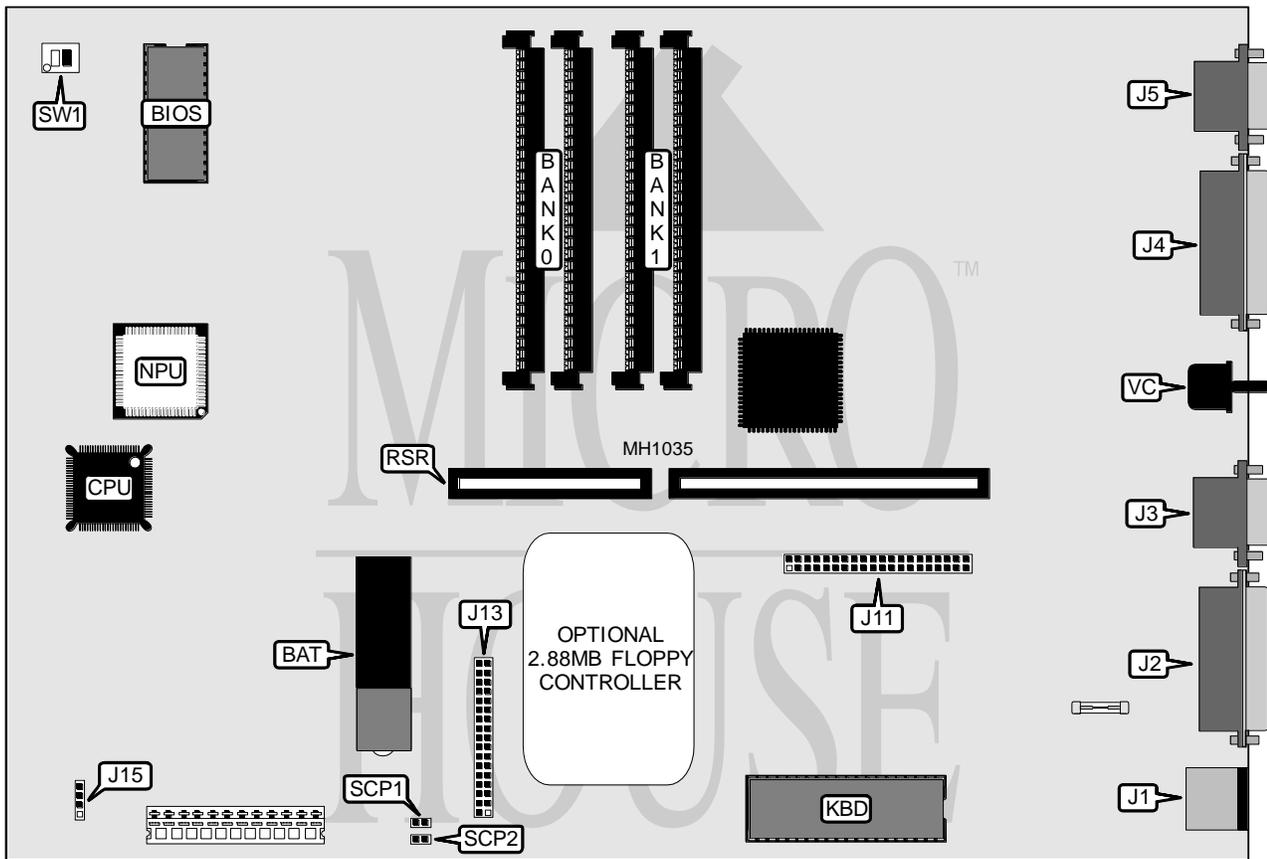

### CONNECTIONS

Purpose	Location	Purpose	Location
Battery	BAT	IDE interface	J11
Keyboard	J1	Floppy drive interface	J13
Serial port 2	J2	Power LED & IDE interface LED	J15
Serial port 1	J3	Riser card	RSR
Parallel port	J4	Speaker volume control	VC
VGA interface	J5		

*Continued on next page . . .*

# NCR CORPORATION

## CLASS 3210/3215

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Password check enabled	SCP1 & SCP2	Open
Password clear	SCP1 & SCP2	Closed
í VGA interface enabled	SW1/1	Off
VGA interface disabled	SW1/1	On
í Monitor type select color	SW1/2	On
Monitor type select monochrome	SW1/2	Off

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	NONE	NONE
3MB	(2) 1M x 9	NONE
5MB	(2) 1M x 9	(2) 1M x 9
9MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9