


CAF TECHNOLOGY, INC.

N 3 1 2 - 2 5

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	VLSI
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80387SX

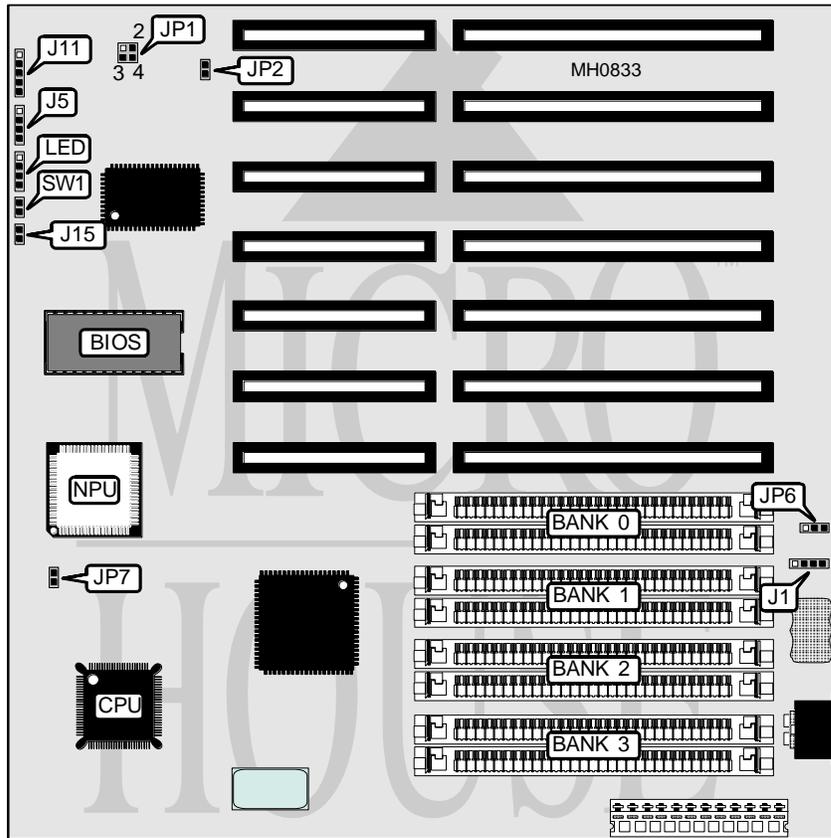

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Reset switch	J15
Speaker	J5	Turbo switch	SW1
Power LED & keylock	J11	Turbo LED	LED

Continued on next page . . .

CAF TECHNOLOGY, INC.

N 3 1 2 - 2 5

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP1	pins 1 & 2 closed
CMOS memory clear	JP1	pins 3 & 4 closed
í Monitor type select monochrome	JP2	Open
Monitor type select color	JP2	Closed
í Battery type select internal	JP6	pins 1 & 2 closed
Battery type select external	JP6	pins 2 & 3 closed
í Pipeline mode disabled	JP7	Closed
Pipeline mode enabled	JP7	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			
8MB	(2) 4M x 9	NONE	NONE	NONE
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE