


UNIDENTIFIED 80386SX-C

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	VLSI
Max. Onboard DRAM	16MB
SRAM Cache	None
BIOS	AMI
Dimensions	220mm x 180mm
I/O Options	None
NPU Options	80387SX

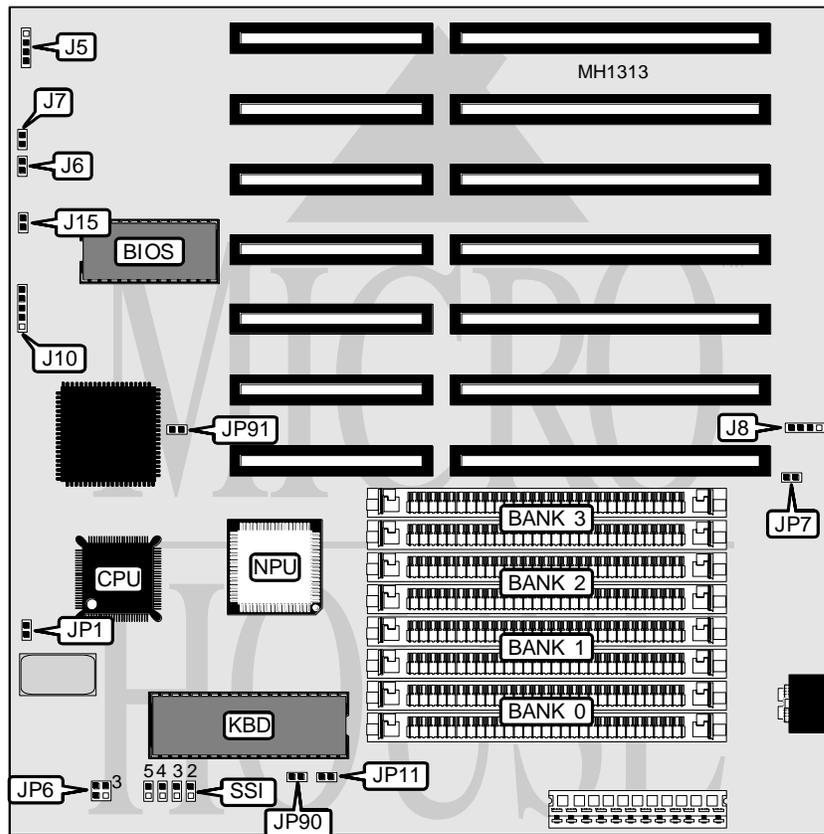

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J5	External battery	J8
Turbo switch	J6	Power LED & keylock	J10
Turbo LED	J7	Reset switch	J15

Continued on next page . . .

UNIDENTIFIED

80386SX-C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Pipeline mode enabled	JP1	closed
Pipeline mode disabled	JP1	open
í CMOS memory normal operation	JP6	pins 1 & 2 closed
CMOS memory clear	JP6	pins 3 & 4 closed
í Battery select internal	JP7	closed
Battery select external	JP7	open
í Monitor type select monochrome	JP11	open
Monitor type select color	JP11	closed
í Parity check enabled	JP90	closed
Parity check disabled	JP90	open
í Chipset type select 82C311	JP91	open
í Chipset type select 82C310	JP91	open
í Keyboard controller set on pin 23	SSI	pins 1 & 2 closed
Keyboard controller set on pin 27	SSI	pins 1 & 3 closed
Keyboard controller set on pin 30	SSI	pins 1 & 4 closed
Keyboard controller set on pin 32	SSI	pins 1 & 5 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			
8MB	(2) 4M x 9	NONE	NONE	NONE
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE