


# DELL COMPUTER CORPORATION TURBO WUGO

**Processor** 8088  
**Processor Speed** 4.77/6MHz  
**Chip Set** None  
**Max. Onboard DRAM** 640KB  
**Cache** None  
**BIOS** Phoenix  
**Dimensions** 334mm x 218mm  
**I/O Options** None  
**NPU Options** 8087

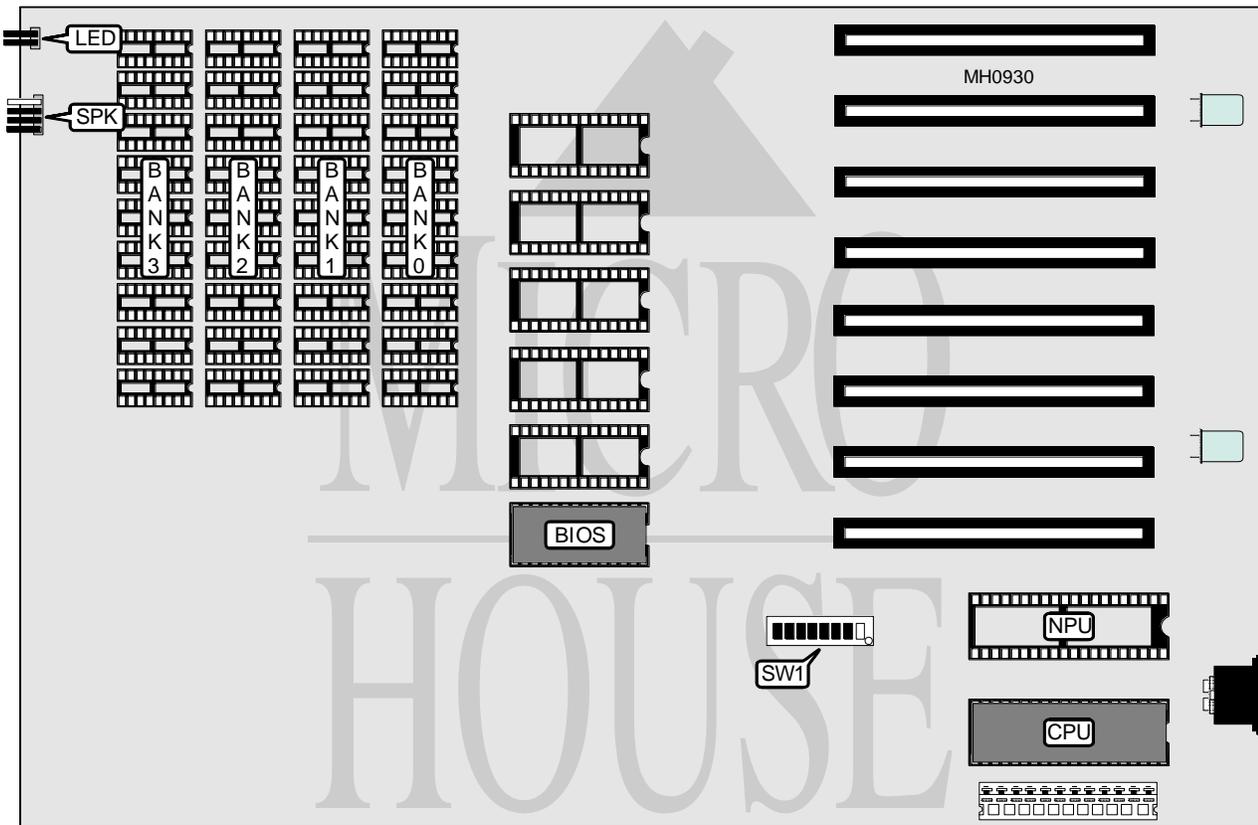

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	SPK	Turbo LED	LED

Continued on next page . . .

# DELL COMPUTER CORPORATION

## TURBO WUGO

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Factory configured - do not alter	SW1/1	Off
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off
í Factory configured - do not alter	SW1/3	Off
í Factory configured - do not alter	SW1/4	Off

DRAM CONFIGURATION
Note: Board is factory intalled with 640KB of DRAM and is not configurable.

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off

MONITOR CONFIGURATION		
Function	SW1/5	SW1/6
EGA	On	On
CGA	On	Off
MDA	Off	Off