EVEREX SYSTEMS, INC.
A G I 4 8 6 D X 3 3 (E V - 1 8 1 3 4)

Processor	80486DX
Processor Speed	33MHz
Chip Set	C & T/Suntac
Max. onboard DRAM	32MB
Cache	128KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	Front panel connector
NPU Options	4167
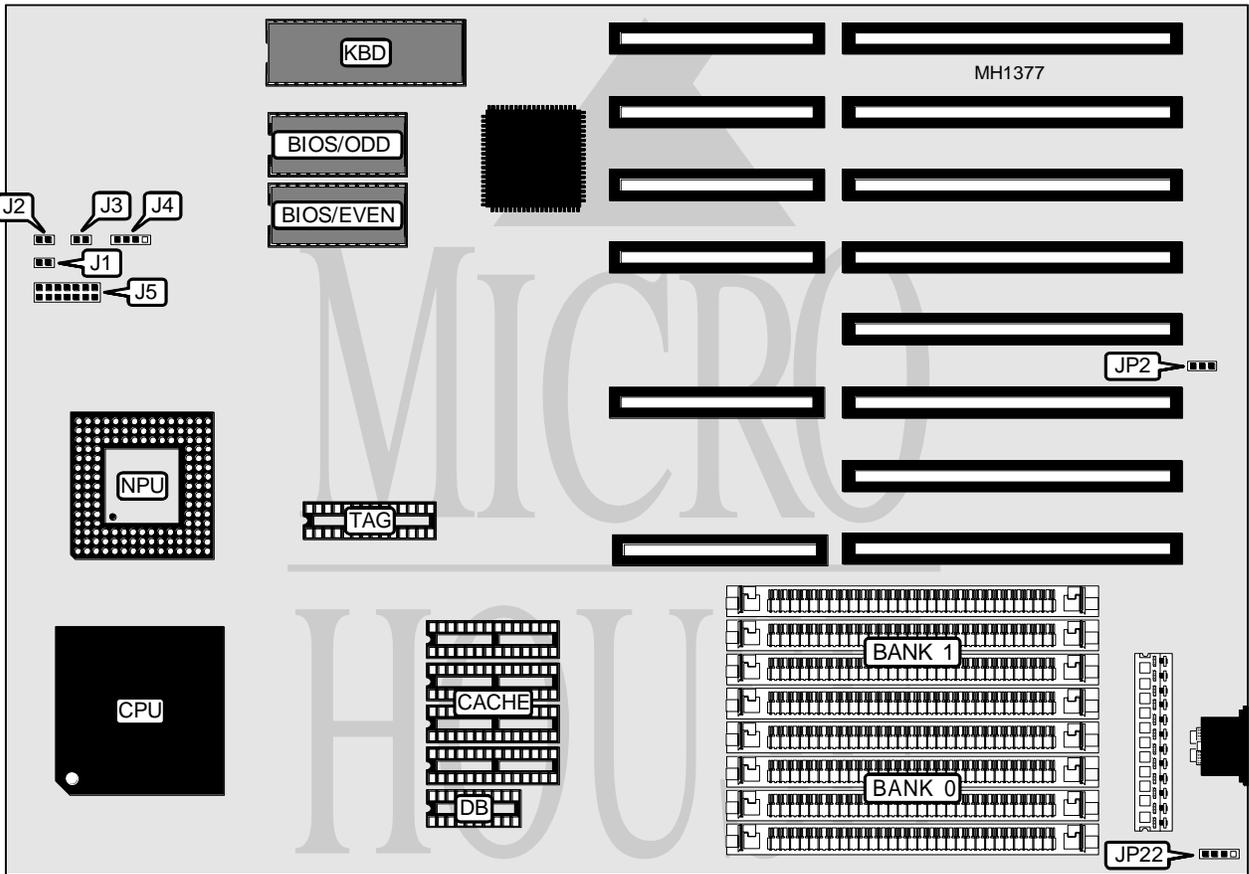
CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J1	Speaker	J4
Turbo LED	J2	Front panel connector	J5
Turbo switch	J3	External battery	JP22

EVEREX SYSTEMS, INC.
AGI 486DX 33 (EV-18134)

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	JP2	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	TAG	Dirty Bit
128KB	(4) 32K x 8	(1) 32K x 8	(1) 16K x 1