


DELL COMPUTER CORPORATION GOLDEN TURBO

Processor 8088
Processor Speed 4.77/8MHz
Chip Set None
Max. Onboard DRAM 640KB
Cache None
BIOS Phoenix
Dimensions 334mm x 218mm
I/O Options None
NPU Options 8087

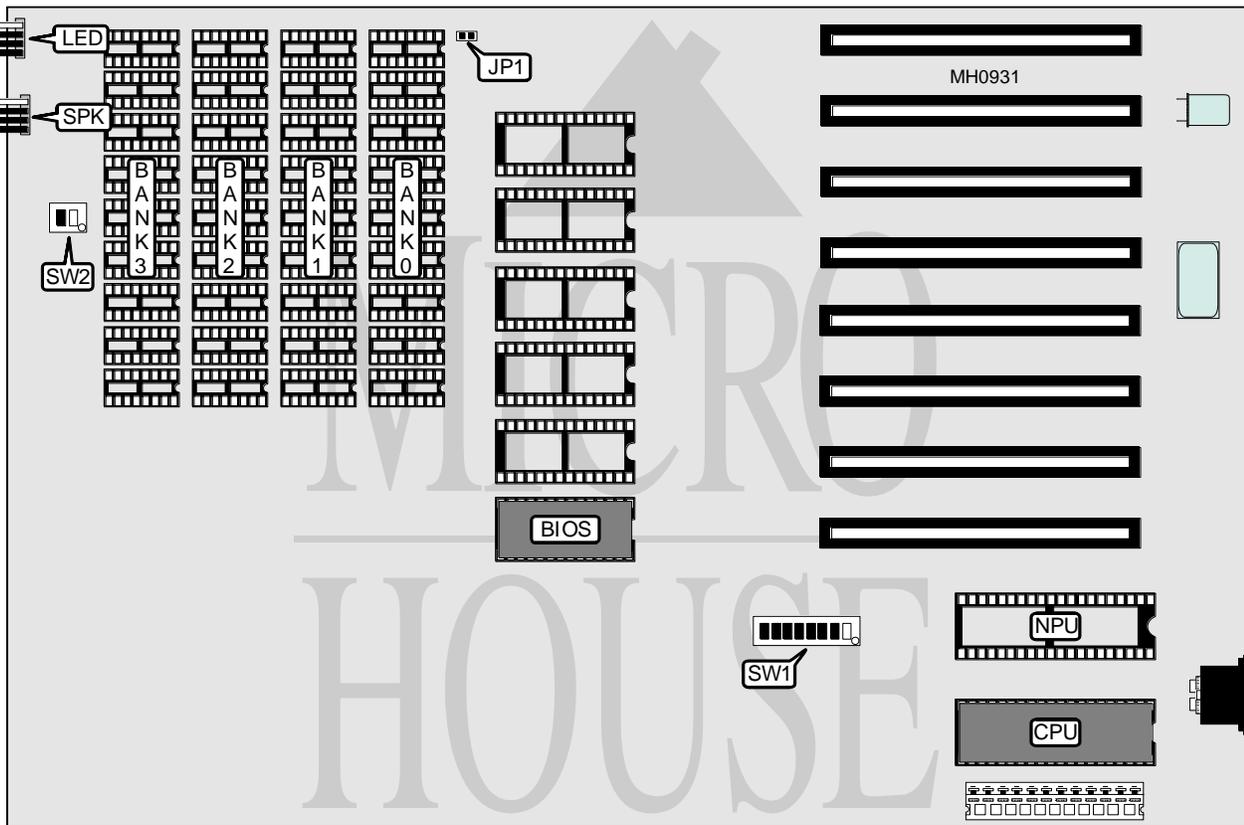

| CONNECTIONS | | | |
|-------------|----------|-----------------------|----------|
| Purpose | Location | Purpose | Location |
| Speaker | SPK | Turbo LED & power LED | LED |

Continued on next page . . .

DELL COMPUTER CORPORATION

GOLDEN TURBO

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|-------------------------------------|--------|----------|
| Function | Switch | Position |
| í Factory configured - do not alter | SW1/1 | Off |
| í NPU disabled | SW1/2 | On |
| NPU enabled | SW1/2 | Off |
| í Factory configured - do not alter | SW1/3 | Off |
| í Factory configured - do not alter | SW1/4 | Off |

| DRAM JUMPER CONFIGURATION | |
|---|--------|
| Size | JP1 |
| 256KB | Open |
| 640KB | Closed |
| Note: System memory is factory configured at 640KB and should not be removed. Setting JP1 open forces the system to only recognize 256KB. | |

| CPU SPEED CONFIGURATION | | |
|-------------------------|-------|-------|
| Speed | SW2/1 | SW2/2 |
| Fast | On | Off |
| Normal | Off | On |

| FLOPPY DRIVE CONFIGURATION | | |
|----------------------------|-------|-------|
| Drives installed | SW1/7 | SW1/8 |
| 1 | On | On |
| 2 | Off | On |
| 3 | On | Off |
| 4 | Off | Off |

| MONITOR CONFIGURATION | | |
|-----------------------|-------|-------|
| Type | SW1/5 | SW1/6 |
| EGA | On | On |
| CGA | On | Off |
| MDA | Off | Off |