


# DELL COMPUTER CORPORATION SYSTEM 200

<b>Processor</b>	80286
<b>Processor Speed</b>	6/8/12MHz
<b>Chip Set</b>	C & T
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	335mm x 192mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

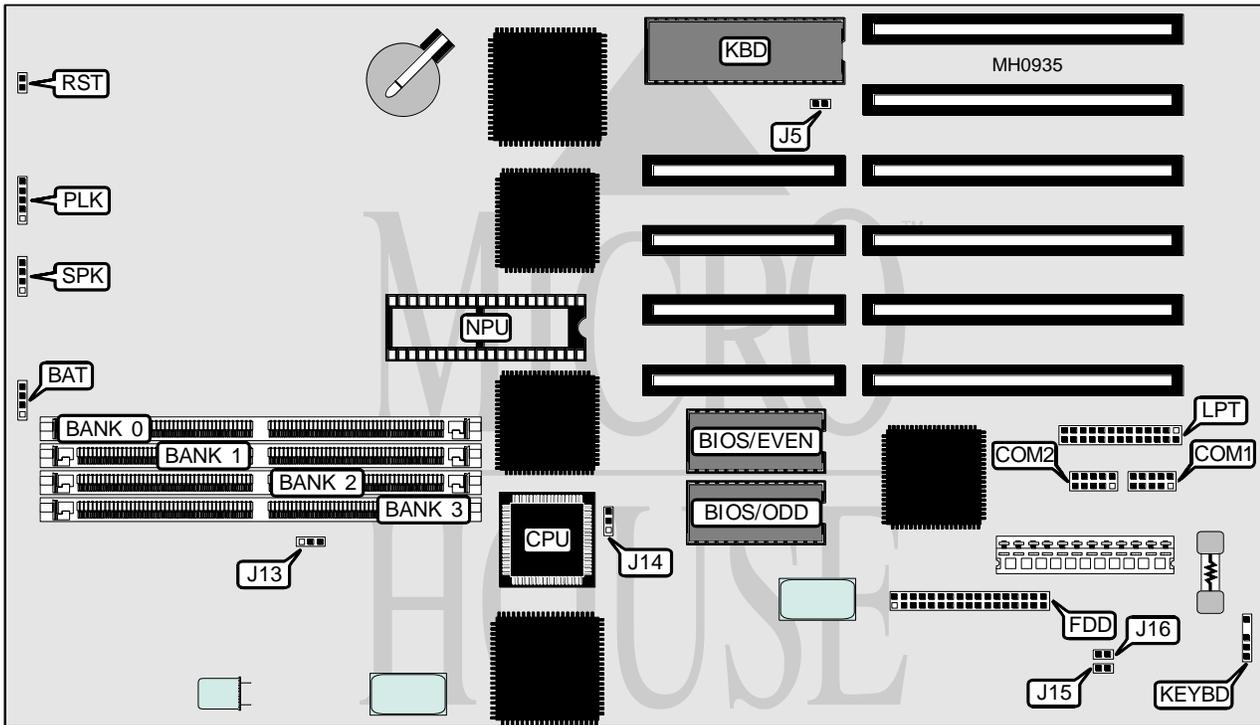

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	BAT	Parallel port	LPT
Serial port 1	COM1	Power LED & keylock	PLK
Serial port 2	COM2	Reset switch	RST
Floppy drive interface	FDD	Speaker	SPK

Note: On most board revisions, the floppy interface is not functional or has been removed.

*Continued on next page . . .*

# DELL COMPUTER CORPORATION

## SYSTEM 200

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Maintenance mode disabled	J5	Open
Maintenance mode enabled	J5	Closed
í NPU installed select 80287 or 80C287	J13 & J14	pins 1 & 2 closed
NPU installed select IC-based debugger	J13 & J14	pins 2 & 3 closed
í Factory configured - do not alter	J15	Open
í Factory configured - do not alter	J16	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	NONE	NONE	NONE
2MB	(1) 256K x 36	(1) 256K x 36	NONE	NONE
3MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	NONE
4MB	(1) 256K x 36			
4MB	(1) 1M x 36	NONE	NONE	NONE
5MB	(1) 1M x 36	(1) 256K x 36	NONE	NONE
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	NONE
7MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
9MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36	NONE
10MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
13MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36
16MB	(1) 1M x 36			

Note: Sizes shown here are in addition to 640KB factory configured on the main board.