


REPLY CORPORATION MODEL 16

Processor	80386SX/80486SLC
Processor Speed	20MHz
Chip Set	C & T
Max. onboard DRAM	4MB
Cache	8KB
BIOS	Reply Corporation
Dimensions	330mm x 250mm
I/O Options	16 bit MCA bus slot with video extension, CPU card, floppy drive interface, MCA hard drive interface, parallel ports (2), PS/2 mouse port, serial ports (2), VGA port.
NPU Options	80387SX

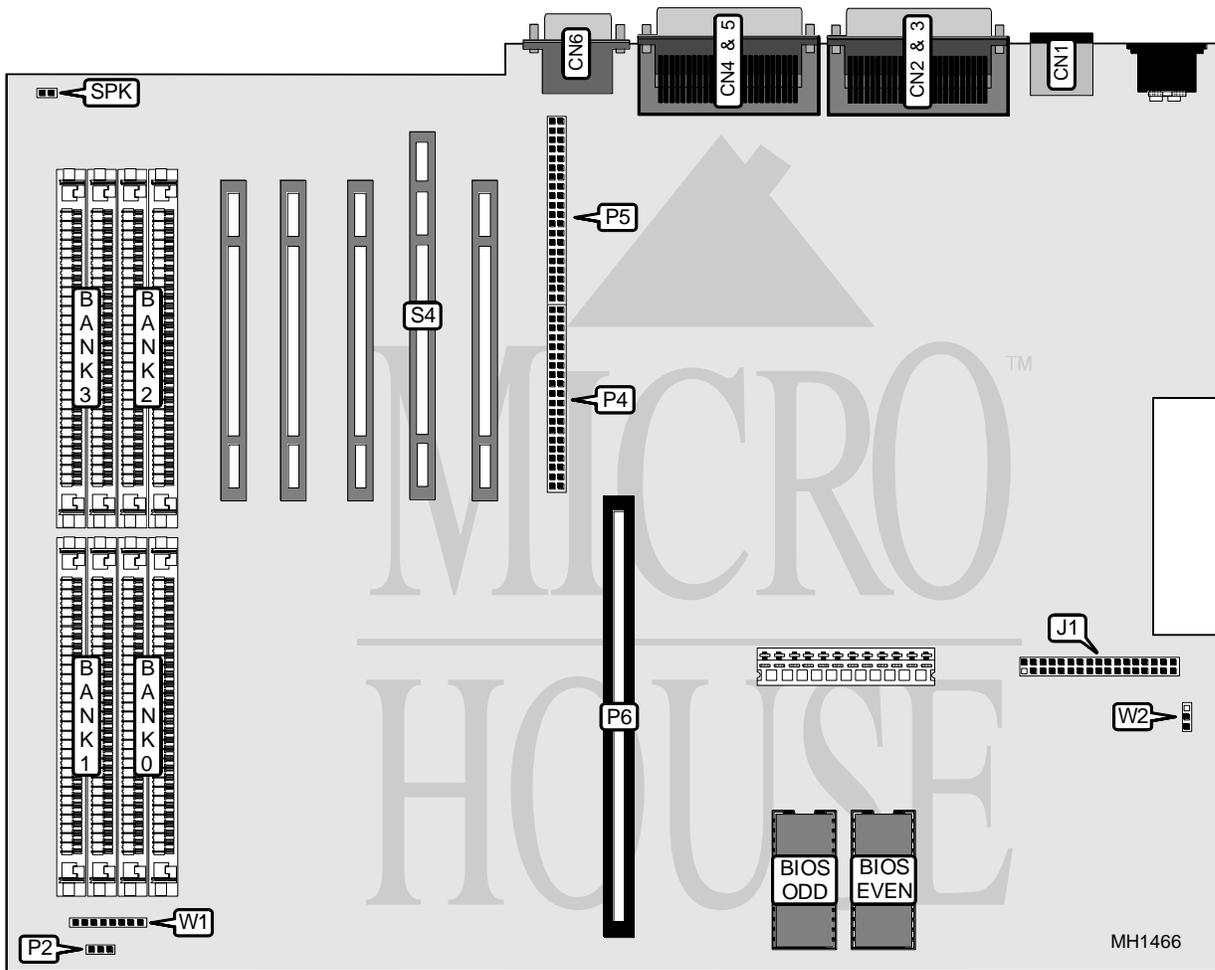

Continued on next page . . .

REPLY CORPORATION

Model 16

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Floppy drive interface	J1
Serial port (top)	CN2	External Battery	P2
Serial port (bottom)	CN3	MCA hard drive interface	P4 & P5
Parallel port (top)	CN4	CPU processor card	P6
Parallel port (bottom)	CN5	MCA bus slot with video extension	S4
VGA Port	CN6	Speaker	SPK

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	W2	pins 1 & 2 closed
CMOS memory clear	W2	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9			
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			

CPU Processor Module

