


# UNIDENTIFIED ALI 386SX MAINBOARD

<b>Processor</b>	80386SX/CX486SLC
<b>Processor Speed</b>	16/20/25/33MHz
<b>Chip Set</b>	None
<b>Max. Onboard DRAM</b>	16MB
<b>SRAM Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	216mm x 170mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

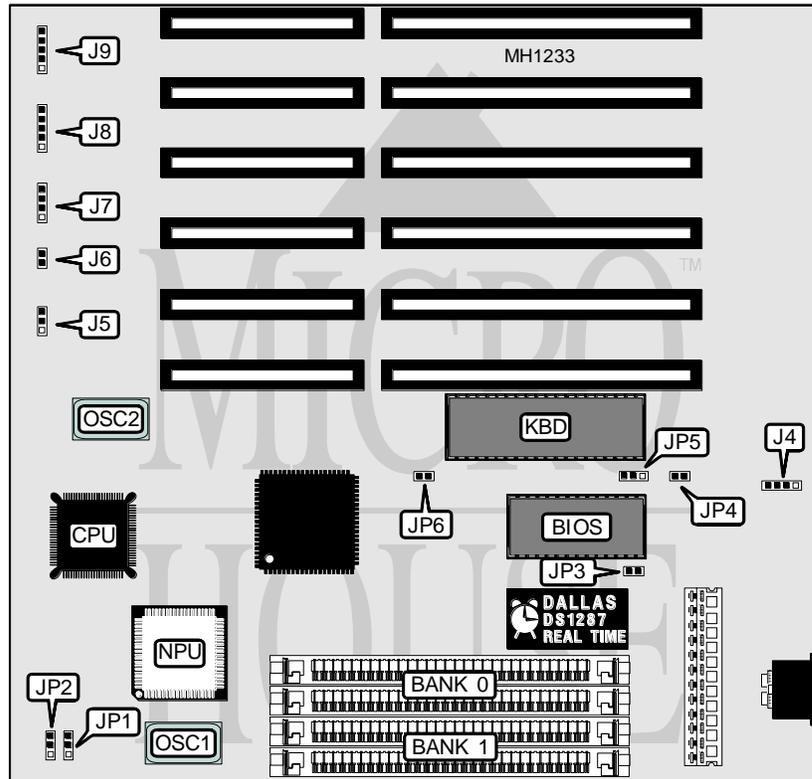

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Turbo switch & LED	J8
Reset switch	J6	Power LED & keylock	J9
Speaker	J7		

Continued on next page . . .

# UNIDENTIFIED

## ALI 386SX MAINBOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í ADS signal delay disabled	J5	pins 2 & 3 closed
ADS signal delay enabled	J5	pins 1 & 2 closed
í NPU mode select synchronous with CPU	JP2	pins 1 & 2 closed
NPU mode select asynchronous	JP2	pins 2 & 3 closed
í RTC type select 146816	JP3	open
RTC type select DS1287	JP3	closed
í Monitor type select monochrome	JP4	open
Monitor type select color	JP4	closed
í Parity check enabled	JP6	open
Parity check disabled	JP6	closed

BUS CLOCK CONFIGURATION		
CPU Speed	JP1	JP5
33MHz	pins 2 & 3 closed	pins 2 & 3 closed
25MHz	pins 1 & 2 closed	pins 1 & 2 closed
20MHz	pins 2 & 3 closed	pins 1 & 2 closed
16MHz	pins 1 & 2 closed	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9