


UNIDENTIFIED MINI-386/387

| | |
|--------------------------|----------------------------------|
| Processor | 80386DX |
| Processor Speed | 25MHz |
| Chip Set | C & T |
| Max. Onboard DRAM | 8MB |
| SRAM Cache | None |
| BIOS | AMI/Award |
| Dimensions | 330mm x 218mm |
| I/O Options | 32-bit external memory card slot |
| NPU Options | 80387 |

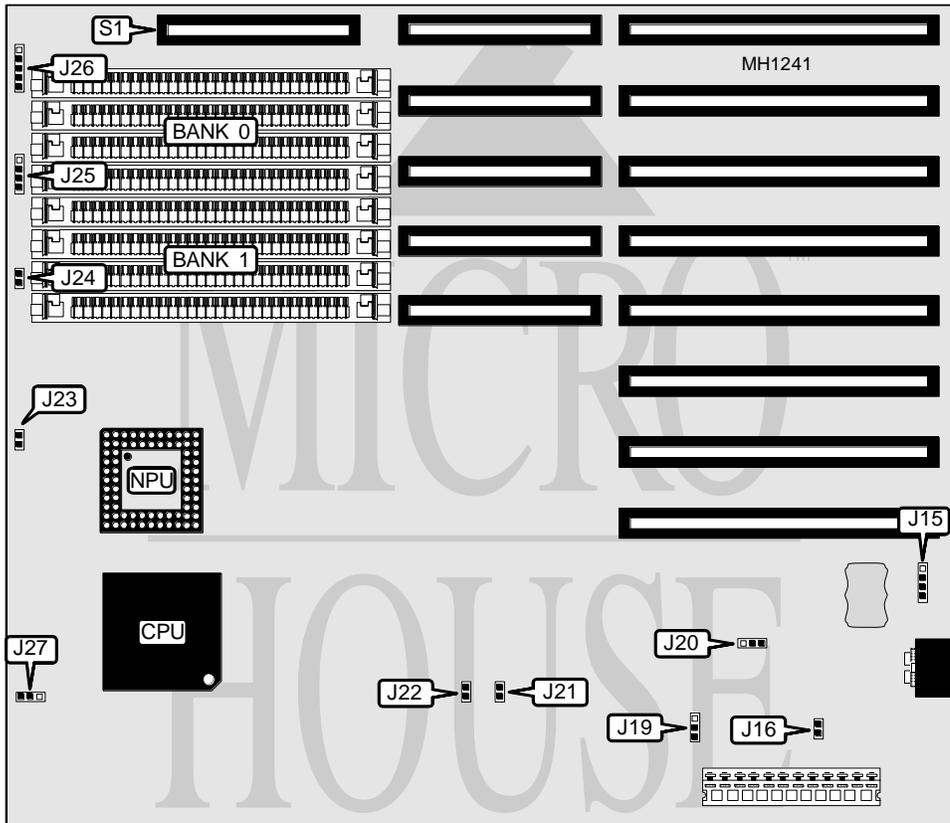

| CONNECTIONS | | | |
|------------------|----------------|-----------------------------|----------|
| Purpose | Location | Purpose | Location |
| External battery | J15 | Speaker | J25 |
| Turbo switch | J19 pins 2 & 3 | Power LED & keylock | J26 |
| Reset switch | J23 | 32-bit external memory card | S1 |
| Turbo LED | J24 | | |

Continued on next page . . .

UNIDENTIFIED

MINI-386/387

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|---|--------|----------------------|
| Function | Jumper | Position |
| í Monitor type select color | J16 | closed |
| Monitor type select monochrome | J16 | open |
| í CPU speed select switchable at turbo switch | J19 | pins 2 & 3 connected |
| CPU speed select switchable at keyboard | J19 | pins 1 & 2 closed |
| í NPU mode select synchronous with CPU | J20 | pins 2 & 3 closed |
| NPU mode select asynchronous with CPU | J20 | pins 1 & 2 closed |
| í NPU enabled | J21 | closed |
| | J22 | closed |
| NPU disabled | J21 | open |
| | J22 | open |
| í CPU speed select 16/20MHz | J27 | pins 2 & 3 closed |
| CPU speed select 20/25MHz | J27 | pins 1 & 2 closed |

| DRAM CONFIGURATION | | |
|--------------------|--------------|--------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (4) 256K x 9 | NONE |
| 2MB | (4) 256K x 9 | (4) 256K x 9 |
| 4MB | (4) 1M x 9 | NONE |
| 8MB | (4) 1M x 9 | (4) 1M x 9 |