AMERICAN DIGICOM CORPORATION
D I G I S - P 5

Processor	Pentium
Processor Speed	60/66MHz
Chip Set	Opti
Max. Onboard DRAM	128MB
Cache	64/128/256/512KB
BIOS	AMI
Dimensions	303mm x 220mm
I/O Options	32-bit VESA local bus slots (2)
NPU Options	None
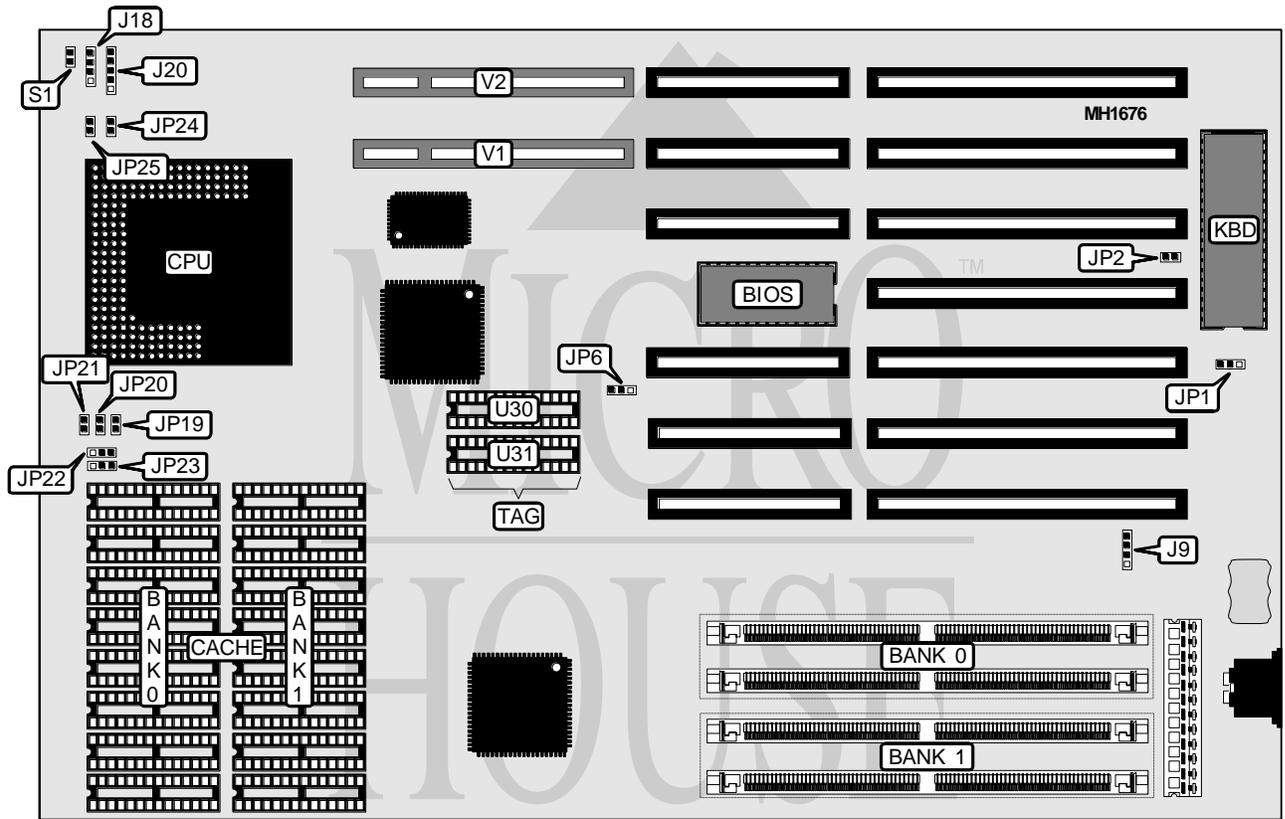
CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J9	Turbo LED	JP25
Power LED & keylock	J20	Reset switch	S1
Speaker	JP18	32-bit VESA Local bus slot	V1
Turbo switch	JP24	32-bit VESA Local bus slot	V2

AMERICAN DIGICOM CORPORATION
D I G I S - P 5

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í CMOS memory normal operation	JP1	pins 2 & 3 closed
CMOS memory clear	JP1	pins 1 & 2 closed
í Monitor type select color	JP2	closed
Monitor type select monochrome	JP2	open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	NONE
4MB	(2) 512K x 36	NONE
4MB	(2) 256K x 36	(2) 256K x 36
6MB	(2) 256K x 36	(2) 512K x 36
8MB	(2) 512K x 9	(2) 512K x 36
8MB	(2) 1M x 36	NONE
10MB	(2) 256K x 36	(2) 1M x 36
12MB	(2) 512K x 36	(2) 1M x 36
16MB	(2) 1M x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE
18MB	(2) 256K x 36	(2) 2M x 36
20MB	(2) 512K x 36	(2) 2M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 2M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE
34MB	(2) 256K x 36	(2) 4M x 36
36MB	(2) 512K x 36	(2) 4M x 36
40MB	(2) 1M x 36	(2) 4M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
66MB	(2) 256K x 36	(2) 8M x 36
68MB	(2) 512K x 36	(2) 8M x 36
72MB	(2) 1M x 36	(2) 8M x 36
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36

AMERICAN DIGICOM CORPORATION
DIGIS-P5

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	TAG (U31)	TAG (U30)
64KB	(4) 8K x 8	NONE	(1) 8K x 8	NONE
128KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8	NONE
256KB	(4) 32K x 8	NONE	(1) 8K x 8	NONE
512KB	(4) 32K x 8	(4) 32K x 8	(1) 8K x 8	8K x 8 or 32K x 8

CACHE JUMPER CONFIGURATION					
Size	JP6	JP19	JP20	JP21	JP22	JP23
64KB	pins 1 & 2	Open	Open	Open	pins 1 & 2	pins 1 & 2
128KB	pins 2 & 3	Closed	Open	Open	pins 2 & 3	pins 2 & 3
256KB	pins 1 & 2	Closed	Closed	Open	pins 1 & 2	pins 1 & 2
512KB	pins 2 & 3	Closed	Closed	Closed	pins 2 & 3	pins 2 & 3